


Coils for Corner sensor

K5-N, K5-R, K7-R Series

K5-N

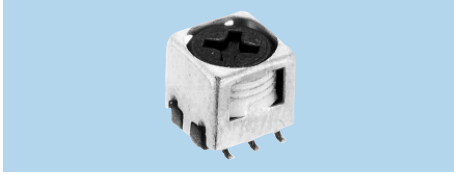


Specifications


- (1) 1~5,900 μ H
- (2) 0.1~20MHz
- (3) F: \pm 2%
L: \pm 5%
- (4) 5~15,000pF \times 2
- (5) 50~100

Features

- SMD
- 1,000pcs./Reel

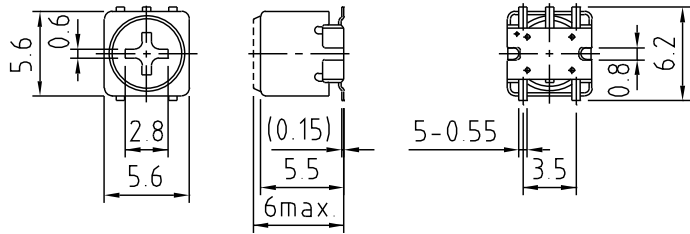

K5-R2

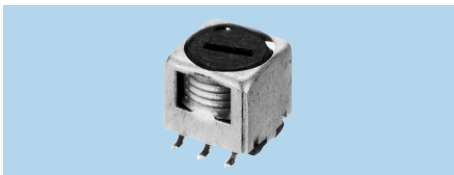


Specifications

- (1) 1~6,700 μ H
- (2) 10~500kHz
- (3) F: \pm 2%
L: \pm 4%
- (4) 5~15,000pF \times 2
- (5) 50~80

Features

- SMD
- 500pcs./Reel

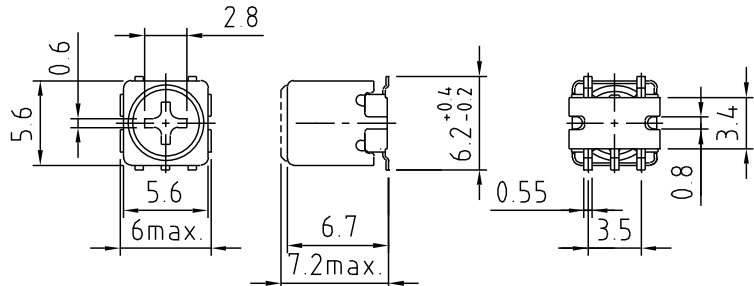

K5-RS




Specifications

- (1) 0.1~8.5mH
- (2) 10~500kHz
- (3) F: \pm 2%
L: \pm 5%
- (4) 5~15,000pF \times 2
- (5) 50~80

Features

- SMD
- 500pcs./Reel

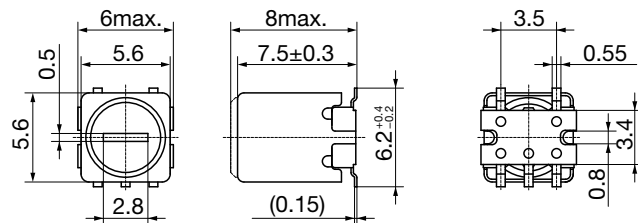


- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q

K5-R3




Specifications

- (1) 1~4mH
- (2) 40~100kHz
- (3) F:±2%
L:±5%
- (4) -
- (5) 40~60

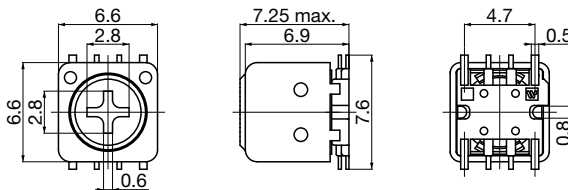

K5-R4

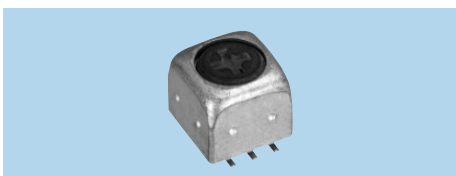


Specifications

- (1) 0.1~5.6mH
- (2) 10~100kHz
- (3) -
- (4) -
- (5) 40~60

Features

- SMD
- High shield property
- 500pcs./Reel

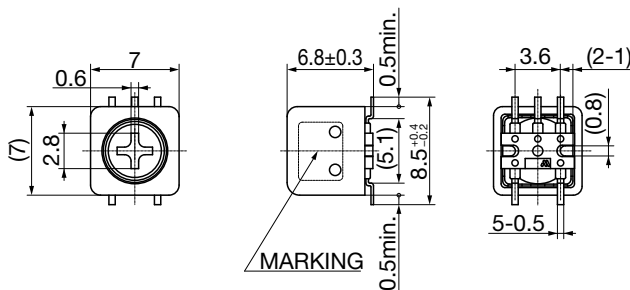

K7-R




Specifications

- (1) 0.1~8.5mH
- (2) 10~100kHz
- (3) F:±2%
L:±5%
- (4) -
- (5) 40~60

Features

- SMD
- Double shield case
- 400pcs./Reel

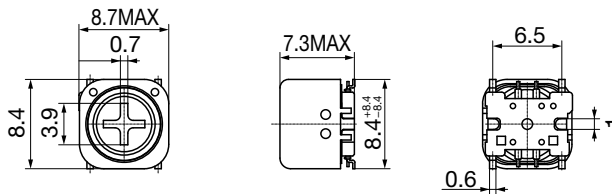

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q