

M35SP-12

FEATURES

1. Compact size and high-output torque.
2. Superior running quietness and stability.





USES

Printers, multifunction machines, copy machines, FAX, etc.


SPECIFICATIONS

Item	M35SP-12	
Rated Voltage	DC 12V	DC 24V
Working Voltage	DC 10.8~13.2V	DC 21.6~26.4V
Rated Current/Phase	173mA	355mA
No. of Phase	4 Phase	
Coil DC Resistance	75Ω/phase±7%	
Step Angle	7.5°/step	
Excitation Method	2-2 Phase excitation(Unipolar driving)	
Insulation Class	Class E insulation	
Holding Torque	29.4mN·m	47.0mN·m
Pull-out Torque	14.3mN·m/200pps	24.3mN·m/400pps
Pull-in Torque	14.0mN·m/200pps	23.7mN·m/400pps
Max. Pull-out Pulse Rate	580pps	830pps
Max. Pull-in Pulse Rate	510pps	720pps

CHARACTERISTICS

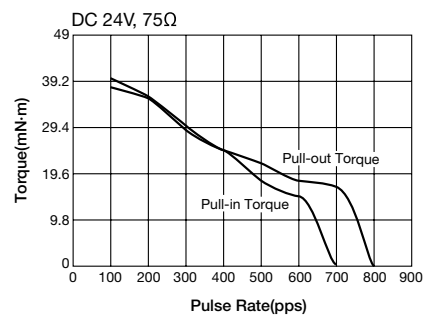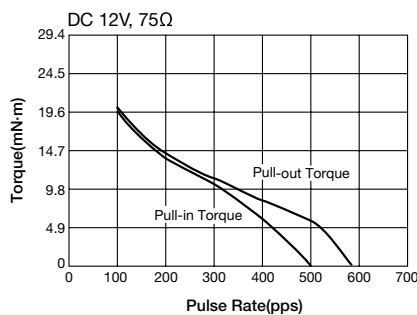

DIMENSIONS

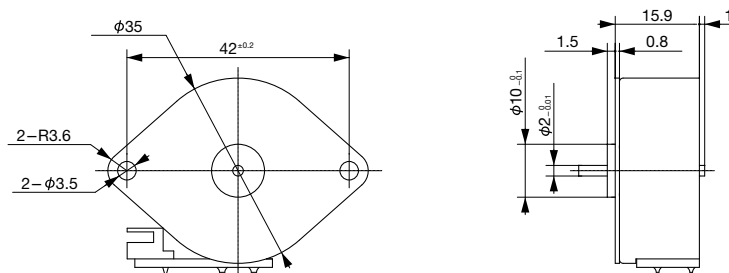

Unit : mm
General tolerance : ±0.5

• Any products mentioned in this catalog are subject to any modification in their appearance and others for improvements without prior notification.
• The details listed here are not a guarantee of the individual products at the time of ordering. When using the products, you will be asked to check their specifications.