


LED Driver Integrated Power Supply For Liquid Crystal Television

SRV2249 Series

Adaptors, Chargers/Switching Power Supplies

FEATURES

1. Internal LED backlight drive circuit.
2. Supporting various lighting control systems. (PWM, DC type etc)
3. Safety design with control and protection circuits in each circuit.
4. Supporting 16~24 inch class.
5. Worldwide support.

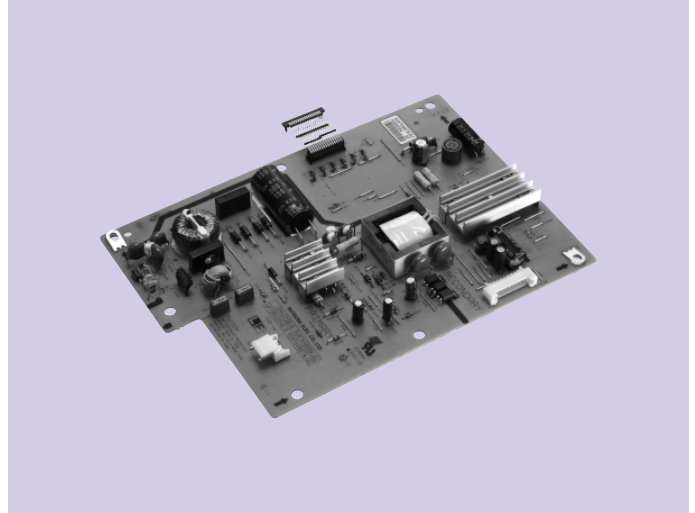


USES

1. Liquid Crystal Television.

BLOCK DIAGRAM


Compact, less power consumption

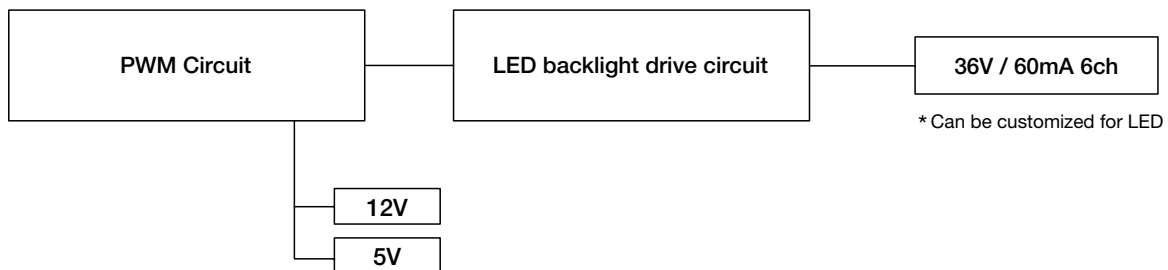

SPECIFICATIONS

Item	Specifications	
Models	SRV2249 JA	
Destination	Supporting single or worldwide input	
Input Voltage	AC 100~240V	
Output Voltage	Power Supply	12V typ 2.2A
	LED	5V typ 0.1A
		Can be customized
Stand by Power Consumption	0.1W less than	
Power Consumption	45W	
Environmental Condition	Operating Temperature	-10~60°C
	Storage Temperature	-40~80°C

DIMENSIONS

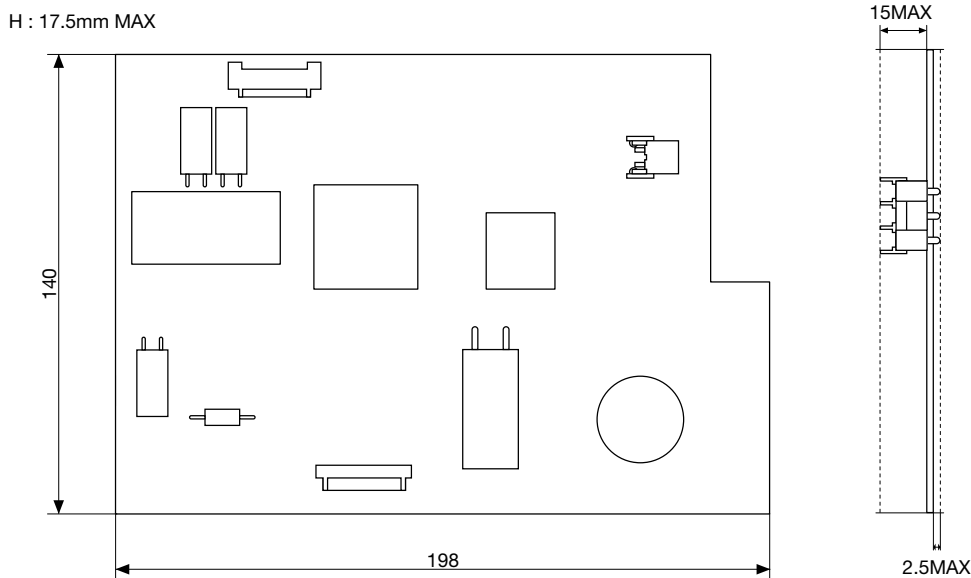

Unit : mm

* Equipped with parts MAX height : 15mm