


### 6.0A GLASS PASSIVATED BRIDGE RECTIFIER

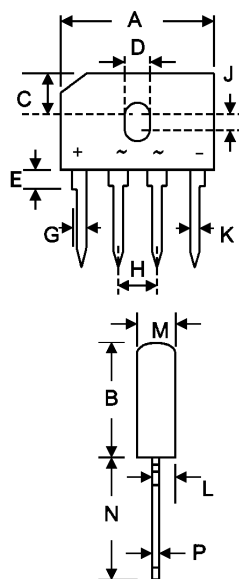

GBU		
Dim	Min	Max
A	21.80	22.30
B	18.30	18.80
C	7.40	7.90
D	3.50	4.10
E	1.52	2.03
G	2.16	2.54
H	4.83	5.33
J	1.65	2.16
K	1.02	1.27
L	0.76	1.02
M	3.30	3.56
N	17.50	18.00
P	0.46	0.56
Unit :mm		

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS