


6.0A ULTRA-FASTGLASS PASSIVATED BRIDGE RECTIFIER

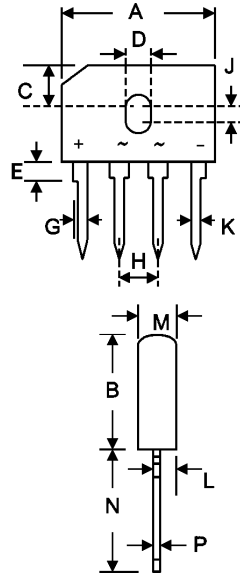

| UBU | | |
|----------|-------|-------|
| Dim | Min | Max |
| A | 21.80 | 22.30 |
| B | 18.30 | 18.80 |
| C | 7.40 | 7.90 |
| D | 3.50 | 4.10 |
| E | 1.52 | 2.03 |
| G | 2.16 | 2.54 |
| H | 4.83 | 5.33 |
| J | 1.65 | 2.16 |
| K | 1.65 | 2.03 |
| L | 0.76 | 1.02 |
| M | 3.30 | 3.56 |
| N | 17.50 | 18.00 |
| P | 0.46 | 0.56 |
| Unit :mm | | |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS