

GLASS PASSIVATED BRIDGE SINGLE-PHASE BRIDGE RECTIFIERS

VOLTAGE 50 to 1000 Volts
CURRENT 20 Amperes


Case Style GBJ

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High case dielectric strength of 2500 V_{RMS}
- * Ideal for printed circuit boards
- * Glass passivated chip junction
- * High surge current capability
- * High temperature soldering guaranteed: 260°C/10 seconds, 0.375 (9.5mm) lead length, 5lbs. (2.3Kg) tension

MECHANICAL DATA

- * Case: Molded plastic body
- * Terminal: Plated leads solderable per MIL-STD-750, Method 2026
- * Mounting Position: Any (Note 3)
- * Mounting Torque: 8 in-lbs max.
Weight: 0.26 oz., 7.0g

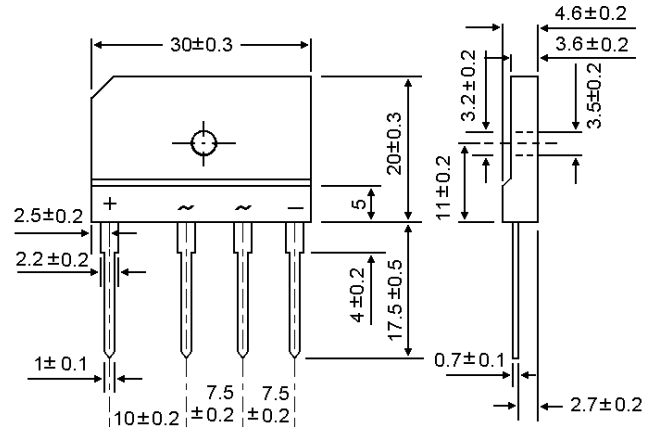

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

* Rating at 25