

# Silicon-Based Technology Corp.

*Small-Signal Schottky Barrier Diodes*

**SBT0340W Series**

SBT0340W series are Schottky Barrier Diodes fabricated by a series of proprietary Schottky barrier patents and technologies (SBT<sup>®</sup>) developed by Silicon-Based Technology Corporation, which exhibit high-performance characteristics for modern switching, conversion and protection applications with high speed and low power consumptions. The package types as described in this data sheet are set forth in routine production; other packages are available upon special orders.

## ■ Features and Advantages:

- Low forward voltage drop( $V_F$ )
- Low reverse leakage current ( $I_R$ )
- Very small conduction power loss
- Very small switching power loss
- Very high switching speed
- Very high reliability

## ■ Electrical Characteristics : (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

| Characteristic                        | Symbol      | Min. | Typ. | Max. | Unit | Test Conditions                  |
|---------------------------------------|-------------|------|------|------|------|----------------------------------|
| Reverse Breakdown Voltage<br>(Note 1) | $V_{(BR)R}$ | 40   | -    | -    | V    | $I_R=10\mu\text{A}$              |
| Forward Voltage (Note 2)              | $V_F$       | -    | 260  | 300  | mV   | $I_F=1.0\text{mA}$               |
| Leakage Current (Note 2)              | $I_R$       | -    | 150  | 650  | nA   | $V_R=10\text{V}$                 |
| Total Capacitance                     | $C_T$       | -    | 2.0  | -    | pF   | $V_R=1\text{V}, f=1.0\text{MHz}$ |



**Silicon-Based Technology Corporation**

1F, No.23, R&D Rd.I, Hsinchu Science Park, Taiwan, R.O.C

Tel : 886-3-5777897

Fax : 886-3-5779832

**■ Maximum Ratings : (@T<sub>A</sub>=25°C unless otherwise specified)**


| <b>Characteristic</b>                            | <b>Symbol</b>       | <b>Value</b> | <b>Unit</b> |
|--|---------------------|--------------|-------------|
| Peak Repetitive Reverse Voltage                  | V <sub>RRM</sub>    | 40           | V           |
| Working Peak Reverse Voltage                     | V <sub>RWM</sub>    |              |             |
| DC Blocking Voltage                              | V <sub>R</sub>      |              |             |
| RMS Reverse Voltage                              | V <sub>R(RMS)</sub> | 28           | V           |
| Maximum (Peak) Forward Current                   | I <sub>FM</sub>     | 30           | mA          |
| Non-Repetitive Peak Forward Surge Current @8.3ms | I <sub>FSM</sub>    | 200          | mA          |
| Power Dissipation (Note 1)                       | P <sub>d</sub>      | 200          | mW          |
| Thermal Resistance, Junction to Ambient Air      | R <sub>θJA</sub>    | 625          | °C/W        |
| Operating Temperature Range                      | T <sub>j</sub>      | -40 to +125  | °C          |
| Storage Temperature Range                        | T <sub>STG</sub>    | -40 to +125  | °C          |

- Notes: 1. Device is mounted on FR-4 PC board with a recommended pad layout, which can be found on our website at [www.sbt.com.tw](http://www.sbt.com.tw)
2. Short duration test pulse is used to minimize self-heating effect.

**■ Package Data :**

- Case: Molded Plastic Material (UL Flammability Classification 94V-0)
- Terminals: Solderable Plated Terminals (MIL-STD-202, Method 208)
- Lead Free Plating (Matte Tin Finish)
- Polarity: See device configurations below
- Approx. Weight: 0.006 grams.
- Package outline and dimensions (see below)


### SOT-323

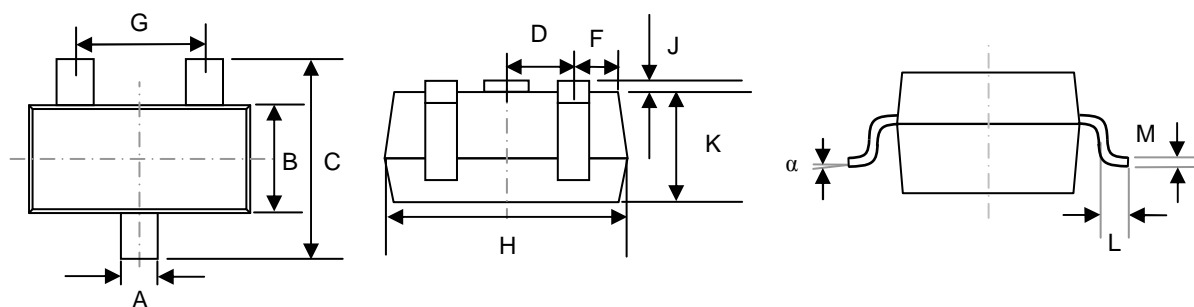
**DIMENSIONS (MM)**


|      | A    | B    | C    | D       | F    | G    | H    | J    | K    | L    | M    | $\alpha$ |
|------|------|------|------|---------|------|------|------|------|------|------|------|----------|
| Min. | 0.25 | 1.15 | 2.00 | 0.65    | 0.30 | 1.20 | 1.80 | 0.0  | 0.90 | 0.25 | 0.10 | 0°       |
| Max. | 0.40 | 1.35 | 2.20 | Nominal | 0.40 | 1.40 | 2.20 | 0.10 | 1.00 | 0.40 | 0.18 | 8°       |

#### ■ Device Configurations :


### TOP VIEW




SBT0340W



SBT0340W-04



SBT0340W-05



SBT0340W-06

#### ■ Ordering Information (Note 3)

| Part Number | Marking Code | Packaging Type | Shipping       |
|-------------|--------------|----------------|----------------|
|             |              |                | 7" Tape & Real |
| SBT0340W    | SBTPD1       | SOD-323        | 3K             |
| SBT0340W-04 | SBTPD2       | SOD-323        | 3K             |
| SBT0340W-05 | SBTPD3       | SOD-323        | 3K             |
| SBT0340W-06 | SBTPD4       | SOD-323        | 3K             |

Notes: 3. Website at <http://www.sbt.com.tw>

4. Bulk package in a box form is also available upon request.

5. Day code marking is YM, in which Y represents year (For example: 2005 is marked by 5);

M represents month in a year (For example: March is marked by C; November is marked by K).