


CUR801-G Thru. CUR808-G

Reverse Voltage: 50 to 1000 V

Forward Current: 8.0 A

RoHS Device




Features

- Low switching noise.
- Low forward voltage drop.
- Low thermal resistance.
- High current capability.
- High fast switching capability.
- High surge capacity.

Mechanical Data

- Case: TO-220AC, molded plastic.
- Epoxy: UL 94V-0 rate flame retardant.
- Lead: MIL-STD-202E method 208C guaranteed.
- Mounting position: Any
- Weight: 2.24 grams

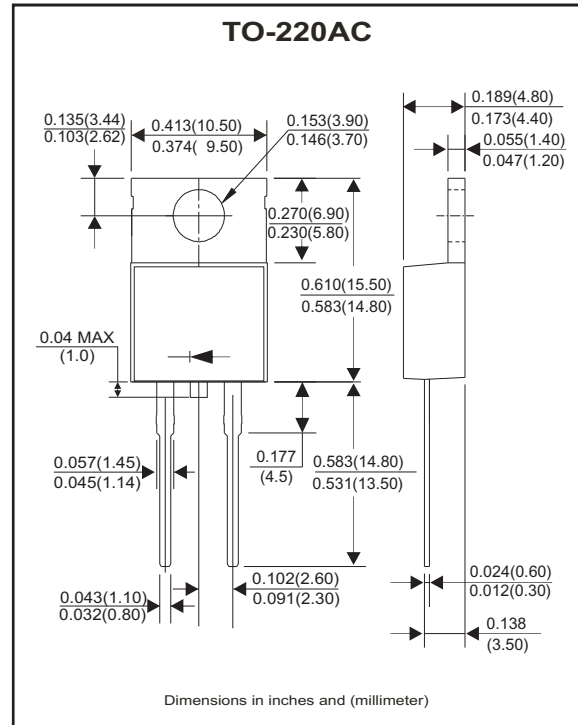

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load derate current by 20%.

| Parameter | Symbol | CUR 801-G | CUR 802-G | CUR 803-G | CUR 804-G | CUR 805-G | CUR 806-G | CUR 807-G | CUR 808-G | Unit |
|---|-----------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward Rectified current @ $T_A=75^\circ C$ | I_o | 8.0 | | | | | | | | A |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method) | I_{FSM} | 150 | | | | | | | | A |
| Peak instantaneous voltage at 8.0A DC | V_F | 1.0 | | 1.3 | | 1.7 | | | V | |
| Maximum DC reverse current at rated DC blocking voltage @ $T_J=25^\circ C$ @ $T_J=100^\circ C$ | I_R | | | | | 10 | 150 | | | μA |
| Typical junction capacitance (Note 2) | C_J | | | | | 40 | | | | pF |
| Typical thermal resistance | $R_{\theta JA}$ | | | | | 2.5 | | | | $^\circ C/W$ |
| Maximum Reverse Recovery Time (Note 1) | T_{rr} | | | | | 60 | | | | nS |
| Operating and storage temperature range | T_J, T_{STG} | -55 ~ +150 | | | | | | | | $^\circ C$ |

NOTES:
 1. Measured with $I_F=0.5A, I_R=1A, I_{RR}=0.25A$.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

RATING AND CHARACTERISTIC CURVES (CUR801-G Thru. CUR808-G)

Fig.1 - Typical Forward Current Derating Curve

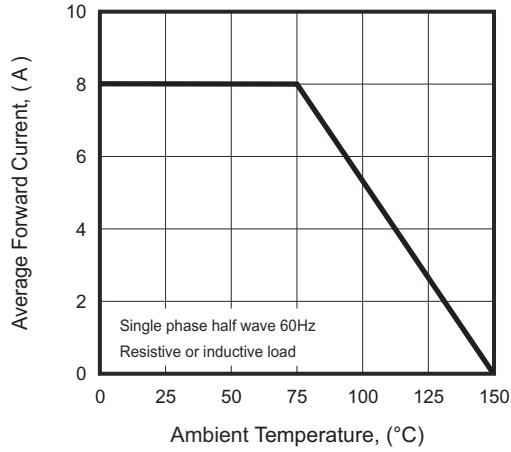


Fig.2 - Typical Instantaneous Forward Characteristics

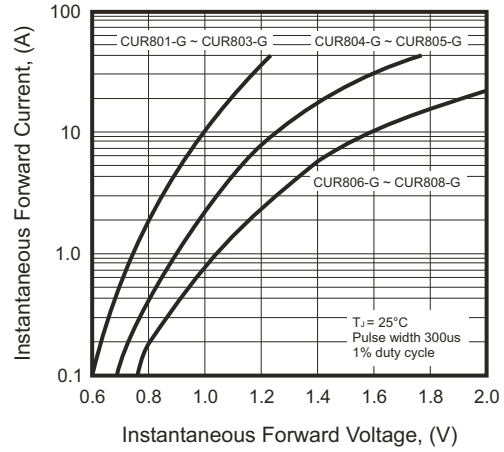


Fig.3 - Maximum Non-repetitive Forward Surge Current

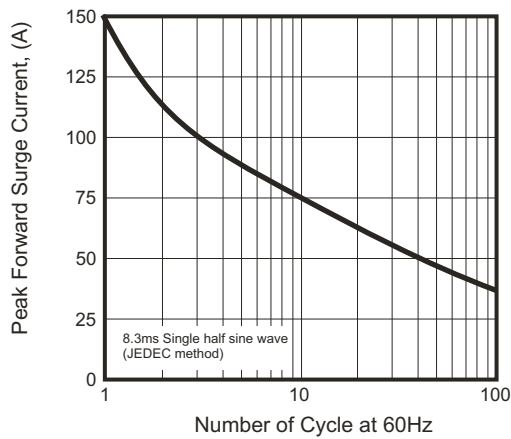


Fig.4 - Typical Junction Capacitance



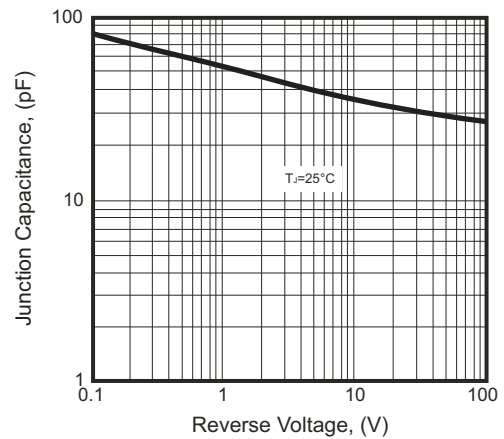


Fig.5 - Typical Reverse Characteristics

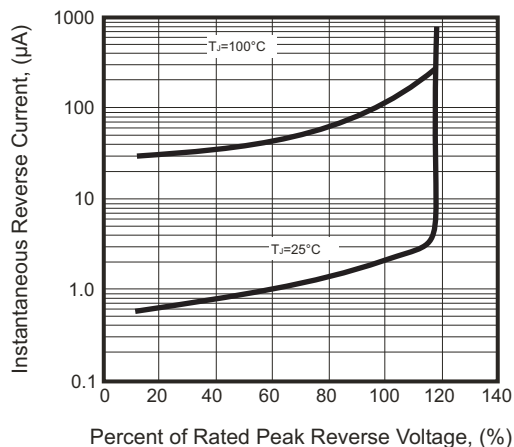

Marking Code

| Part Number | Marking code |
|-------------|--------------|
| CUR801-G | CUR801 |
| CUR802-G | CUR802 |
| CUR803-G | CUR803 |
| CUR804-G | CUR804 |
| CUR805-G | CUR805 |
| CUR806-G | CUR806 |
| CUR807-G | CUR807 |
| CUR808-G | CUR808 |

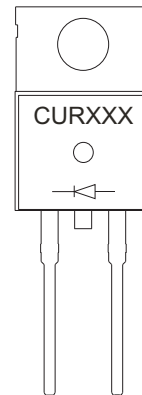

XXX = Product type marking code

Standard Packaging

| Case Type | TUBE PACK | |
|-----------|-----------------|----------------|
| | TUBE (pcs) | BOX (pcs) |
| TO-220AC | 50 | 2,000 |