



Solid State Devices, Inc.

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet


FEATURES:

- Average Output Current 15 Amps
- PIV 50 to 1000 Volts
- Max Thermal Resistance 1.5°C/Watt
- Glass Passivated Rectifier Cells
- Hermetically Sealed
- Choice of Three Terminal Configurations

SSDI introduces a new and complete series of Ultra Fast Recovery Doublers and Center Tap Rectifier Circuits. Designed in cast aluminum cases to provide maximum thermal conductivity and simple installation.

SDA180A – SD180G Series

**15 AMPS
50 - 1000 VOLTS
RECTIFIER ASSEMBLY**

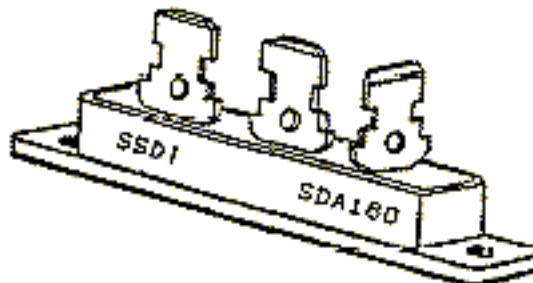

Maximum Ratings		Symbol	Value	Units
Peak Repetitive Reverse Voltage and DC Blocking Voltage	SDA180A	V_{RRM}	50	Volts
	SDA180B		100	
	SDA180C		200	
	SDA180D	V_{RWM}	400	
	SDA180E		600	
	SDA180F	V_R	800	
	SDA180G		1000	
Average DC Output Current TA = Ambient Temp (No Heat Sink) =55°C		$I_{O(DC)}$	See table	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, TA=25°C)		I_{FSM}	150	Amps
Operating and Storage Temperature		T _{OP} & T _{stg}	-55 to +150	°C
Maximum Thermal Resistance Junction to Case		R _{θJC}	1.5	°C/W

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RA0033A

DOC



Solid State Devices, Inc.

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

SDA180A – SDA180G Series

ELECTRICAL CHARACTERISTICS ^{1/, 2/}

Part Number	Peak Inverse Voltage	Sine Wave RMS Input Voltage Max.	Average DC Output Current TC=Case Temp			Average DC Output Current No Heatsink			Peak Surge Current (1 Cycle)	Peak Forward Current	Maximum Forward Voltage @ 5 A (DC)	Maximum Reverse Current	
Symbol	PIV		I _{O(DC)}			I _{O(DC)}			I _{FSM}	I _F	V _F	I _R @ PIV	
Units	Volts ^{4/}	Volts	Amps			Amps			Amps	Amps	μA	μA	
Conditions	25°C	25°C	55°C	100°C	125°C	25°C	55°C	100°C	25°C	25°C	25°C	25°C	100°C
SDA180A	50	35	15	10	5	5	4	2.5	150	18	1.0	1	50
SDA180B	100	70	15	10	5	5	4	2.5	150	18	1.0	1	50
SDA180C	200	140	15	10	5	5	4	2.5	150	18	1.0	1	50
SDA180D	400	280	15	10	5	5	4	2.5	150	18	1.0	1	50
SDA180E	600	420	15	10	5	5	4	2.5	150	18	1.0	1	50
SDA180F	800	560	15	10	5	5	4	2.5	150	18	1.0	1	50
SDA180G	1000	700	15	10	5	5	4	2.5	150	18	1.0	1	50

NOTES:

* Pulse Test: Pulse Width = 300μsec, Duty Cycle = 2%

^{1/} Unless Otherwise Specified, All Electrical Characteristics Per Leg.

^{2/} Unless Otherwise Specified, All Electrical Characteristics @25°C

^{3/} Reverse Recovery Test Conditions: I_F = 0.5A, I_R = 1A, I_{RR} = 0.25A, T_A = 25°C

^{4/} Higher Voltages Are Available – Contact the Factory.

*For information on curves, contact the Factory Representative for Engineering Assistance.

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RA0033A

DOC