



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

SSR2045-28

Designer's Data Sheet


FEATURES:

- Low Reverse Leakage
- Low Forward Voltage Drop
- Hermetically Sealed Surface Mount Package
- Guard Ring for Overvoltage protection
- Eutectic Die Attach
- 175°C Operating Temperature

- TX, TXV and Space Level Screening Available

20 AMP
45 VOLTS
SCHOTTKY
RECTIFIER

28 PIN CLCC



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM VRWM VR	45	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	20	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C) note 1	IFSM	100	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Case	RθJC	4.0	°C/W

Note 1: All pins tied together

NOTE: All specifications are subject to change without notification.
SSDI's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0139 A

MED

SSR2045-28

PRELIMINARY

SSDI

SOLID STATE DEVICES, INC


14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop ($I_F = 10 \text{ A dc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 20 \text{ A dc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse)	VF1	0.65 0.89	Vdc
Instantaneous Forward Voltage Drop ($I_F = 10 \text{ A dc}$, $T_A = -55^\circ\text{C}$, 300 μs Pulse)	VF2	0.71	Vdc
Reverse Leakage Current (Rated VR, $T_A = 25^\circ\text{C}$, 300 μs pulse minimum)	IR1	200	μA
Reverse Leakage Current (Rated VR, $T_A = 100^\circ\text{C}$, 300 μs pulse minimum)	IR2	20	mA
Junction Capacitance (VR = 10 Vdc, $T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$)	CJ	800	pf

CASE OUTLINE: 28 PIN CLCC PIN OUT:

PIN 5-11: CATHODE
PIN 1, 15-28: ANODE
PIN 2, 3, 13, 14: N/C

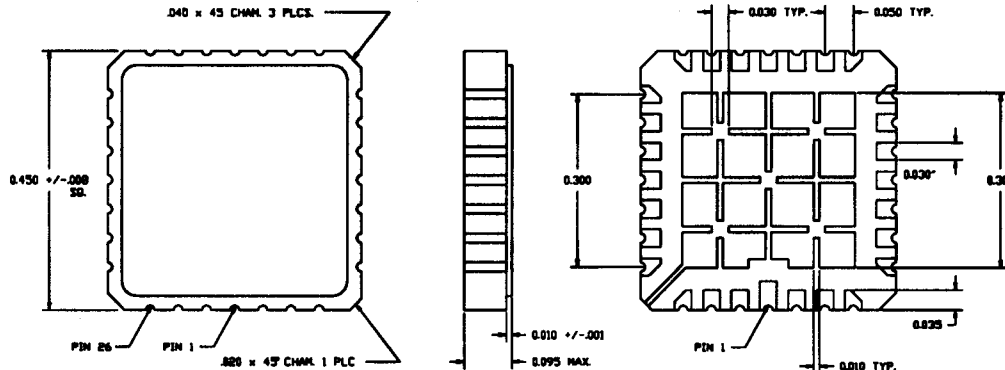

TYPICAL OPERATING CURVES ($T_A = 25^\circ\text{C}$ Unless otherwise specified)

