




SSR08150S.22 thru SSR08200S.22

Designer's Data Sheet

Part Number / Ordering Information^{1/}

SSR08

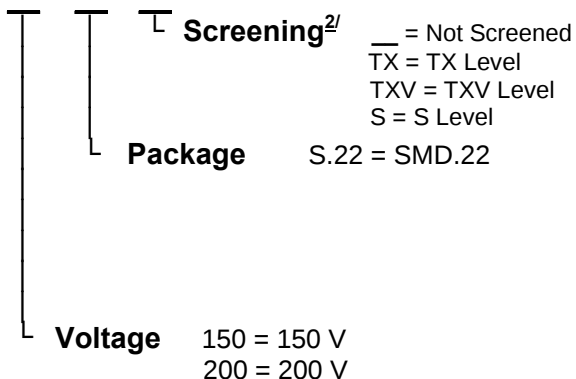

8 AMP HERMETIC SURFACE MOUNT SCHOTTKY RECTIFIER 150 - 200 VOLTS

FEATURES:

- Extremely small footprint
- Extremely low forward voltage drop
- Low reverse leakage
- Hermetically sealed surface mount package
- Guard ring for overvoltage protection
- 175°C operating junction temperature
- TX, TXV, and S level screening available - consult factory



MAXIMUM RATINGS^{3/ 4/}

		Symbol	Value	Units
Peak Repetitive Reverse and DC Blocking Voltage	SSR08150 SSR08200	V_{RRM} V_{RWM} V_R	150 200	Volts
Average Rectified Forward Current (Resistive load, 60 Hz, sine wave, $T_A = 25^\circ\text{C}$)		I_O	8	Amps
Peak Surge Current (8.3 ms pulse, half sine wave superimposed on I_O , allow junction to reach equilibrium between pulses, $T_A = 25^\circ\text{C}$)		I_{FSM}	80	Amps
Operating & Storage Temperature		$T_{OP} \& T_{stg}$	-65 to +175	$^\circ\text{C}$
Maximum Thermal Resistance (Junction to Case)		$R_{\theta JC}$	5 (typ 3.5)	$^\circ\text{C/W}$

NOTES:

- ^{1/} For ordering information, price, and availability - contact factory.
^{2/} Screening based on MIL-PRF-19500. Screening flows available on request.
^{3/} Unless otherwise specified, all electrical characteristics @25°C.
^{4/} For optimal performance, connect anode terminals together.

SMD.22 (S.22)



(dime used for size reference)

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: SH0075A

DOC



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, CA 90638

Phone: (562) 404-4474 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

SSR08150S.22 thru SSR08200S.22

ELECTRICAL CHARACTERISTICS ^{4/}		Symbol	Min	Typ	Max	Units
Instantaneous Forward Voltage Drop (T _A =25°C, 300μsec pulse)	I _F = 0.4 A	V _{F1}		0.65	-	V _{DC}
	I _F = 2 A	V _{F2}		0.77	0.82	
	I _F = 4 A	V _{F3}	-	0.825	0.87	
	I _F = 6 A	V _{F4}		0.865	-	
	I _F = 8 A	V _{F5}		0.90	0.95	
Instantaneous Forward Voltage Drop (T _A =-55°C, 300μsec pulse)	I _F = 4 A	V _{F6}		1.03	-	V _{DC}
	I _F = 8 A	V _{F7}	-	1.34	-	
Instantaneous Forward Voltage Drop (T _A =125°C, 300μsec pulse)	I _F = 0.4 A	V _{F11}		0.49	-	V _{DC}
	I _F = 2 A	V _{F12}		0.615	0.69	
	I _F = 4 A	V _{F13}	-	0.685	0.76	
	I _F = 6 A	V _{F14}		0.73	-	
	I _F = 8 A	V _{F15}		0.77	0.85	
Reverse Leakage Current (Rated V _R , T _A = 25°C, 300μsec pulse minimum)		I _{R1}	-	0.3	5	μA
Reverse Leakage Current (Rated V _R , T _A = 100°C, 300μsec pulse minimum)		I _{R2}	-	50	-	μA
Reverse Leakage Current (Rated V _R , T _A = 125°C, 300μsec pulse minimum)		I _{R3}	-	200	1000	μA
Reverse Leakage Current (Rated V _R , T _A = 150°C, 300μsec pulse minimum)		I _{R4}	-	1000	-	μA
Junction Capacitance (f = 1MHz, T _A = 25°C)	V _R = 5V	C _J	-	90	-	pF
	V _R = 10V			65	100	

Package Outline: SMD.22 (S.22)




PIN OUT:

PIN 1: CATHODE

PIN 2: ANODE

PIN 3: ANODE

Note: For optimal performance, connect anode terminals together.

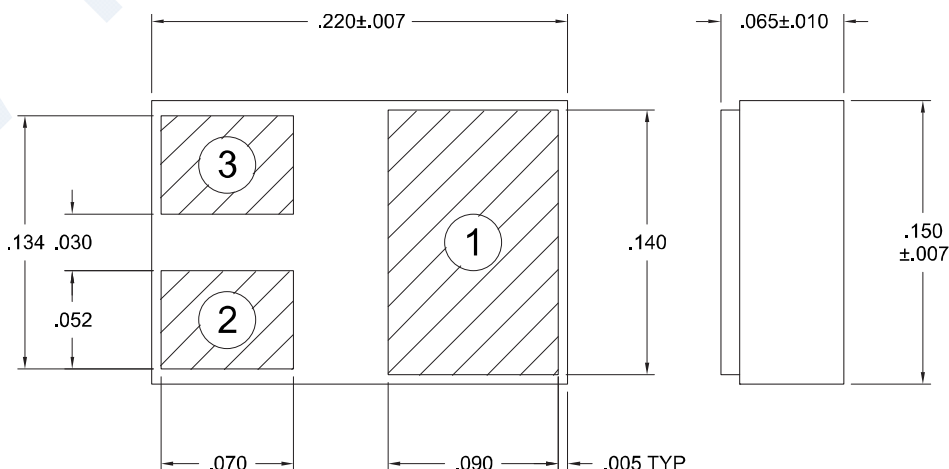

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: SH0075A

DOC