



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

SSR2040J


Designer's Data Sheet

FEATURES:

- Extremely Low Forward Voltage Drop
 - Hermetically Sealed Power Package
 - Guard ring for overvoltage protection
 - Eutectic Die Attach
 - 150°C Operating Junction Temperature
-
- TX, TXV, and Space Level Screening Available

20 AMP
40 VOLTS
SCHOTTKY
RECTIFIER

TO-257



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM VRWM VR	40	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	20	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	300	Amps
Operating and storage temperature	Top & Tstg	-65 to +150	°C
Maximum Thermal Resistance Junction to Case	RθJC	1.5	°C/W

NOTE: All specifications are subject to change without notification.
SSDI's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0157 A

MED

SSR2040J

PRELIMINARY



SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS


CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop ($I_F = 5 \text{ A dc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 10 \text{ A dc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 20 \text{ A dc}$, $T_A = 25^\circ\text{C}$, 300 μs Pulse)	VF1	0.42 0.55 0.78	Vdc
Instantaneous Forward Voltage Drop ($I_F = 20 \text{ A dc}$, $T_A = -55^\circ\text{C}$, 300 μs Pulse)	VF2	0.60	Vdc
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$, 300 μs pulse minimum)	IR1	5	mA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ\text{C}$, 300 μs pulse minimum)	IR2	200	mA
Junction Capacitance ($V_R = 10 \text{ Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$)	CJ	800	pf

CASE OUTLINE: TO-257

PIN OUT:

PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

NOTE:
For best results, connect
Pin 2 & 3 in application

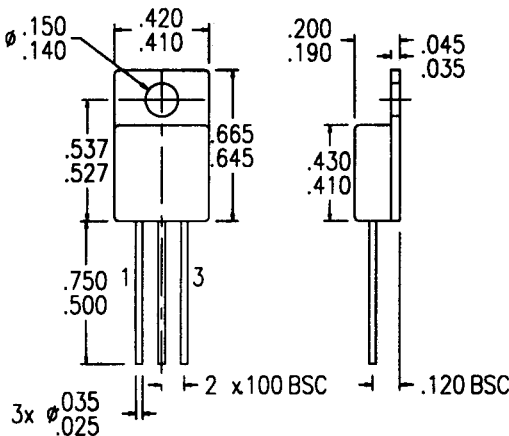

TYPICAL OPERATING CURVES

($T_A = 25^\circ\text{C}$ Unless otherwise specified)

