



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

SSR2010CT/61


Designer's Data Sheet

FEATURES:

- PIV: 100 Volts
- Low Reverse Leakage
- Low Forward Voltage Drop
- Guard Ring for Overvoltage protection
- Isolated Hermetically Sealed Power Package
- Eutectic Die Attach
- 175°C Operating Temperature
- TX, TXV and Space Level Screening Available

20 AMP
100 VOLTS
POSITIVE CENTERTAP
SCHOTTKY
RECTIFIER

TO-61



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM VRWM VR	100	Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	Io	20	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on Io, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	200	Amps
Operating and storage temperature	Top & Tstg	-65 to +175	°C
Maximum Thermal Resistance Junction to Case, both legs tied together	RθJC	0.5	°C/W

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RS0069 B

MED

SSR2010CT/61

PRELIMINARY

SSDI

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424



ELECTRICAL CHARACTERISTICS (Per Leg)

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop ($I_F = 3 \text{ A}$ dc, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 5 \text{ A}$ dc, $T_A = 25^\circ\text{C}$, 300 μs Pulse) ($I_F = 10 \text{ A}$ dc, $T_A = 25^\circ\text{C}$, 300 μs Pulse)	V_{F1}	0.73 0.80 0.90	Vdc
Instantaneous Forward Voltage Drop ($I_F = 5 \text{ A}$ dc, $T_A = -55^\circ\text{C}$, 300 μs Pulse)	V_{F2}	0.86	Vdc
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$, 300 μs pulse minimum)	I_{R1}	50	μA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ\text{C}$, 300 μs pulse minimum)	I_{R2}	2	mA
Junction Capacitance ($V_R = 10 \text{ Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1 \text{ MHz}$)	C_J	400	pf

CASE OUTLINE: TO-61

PIN OUT:

PIN 1: ANODE 1
PIN 2: ANODE 2
PIN 3: CATHODE

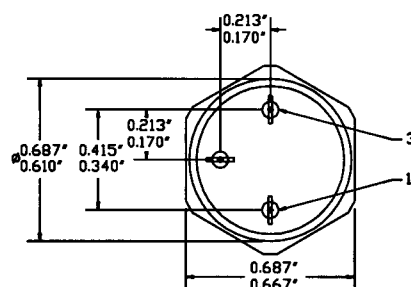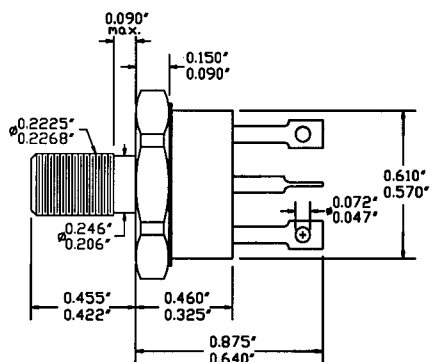

TYPICAL OPERATING CURVES

($T_A = 25^\circ\text{C}$ Unless otherwise specified)

