



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com



Designer's Data Sheet

Part Number/Ordering Information ^{1/}

SPD

— — —

Screening ^{2/}

— = Not Screened

TX = TX Level

TXV = TXV

S = S Level

Package Type

— = Axial Leaded

SMS = Surface Mount Square Tab

Voltage/Family

645-1 = 225V

646-1 = 300V

647-1 = 400V

648-1 = 500V

649-1 = 600V

SPD645-1 thru SPD649-1

and

SPD645-1SMS thru SPD649-1SMS

400 mAMPS

225 — 600 VOLTS

**STANDARD RECOVERY
RECTIFIER**

FEATURES:

- Standard Reverse Recovery (Faster Versions Available)
- V_R to 600 Volts (Higher Voltages Available)
- Hermetically Sealed Glass Package
- Metallurgically Bonded
- High Surge Capability
- No Thermal Fatigue
- Available in Axial & Square Tab Versions
- TX, TXV, and S-Level Screening Available ^{2/}
- Replacement for: 1N645-1, UR-1 thru 1N649-1, UR-1

MAXIMUM RATINGS ^{3/}

RATING		SYMBOL	VALUE	UNIT
Peak Repetitive Reverse Voltage And DC Blocking Voltage	645-1	V_{RRM}	225	Volts
	646-1		300	
	647-1	V_{RWM}	400	
	648-1	V_R	500	
	649-1		600	
Average Rectified Forward Current	$T_A = 25^\circ\text{C}$	I_{O1}	400	mAmps
	$T_A = 150^\circ\text{C}$	I_{O2}	150	
Power Dissipation (at 3/8" from the body, $T_L = 75^\circ\text{C}$)		P_{tot}	600	mWatts
Surge Current ($T_A = 25^\circ\text{C}$ to 150°C , for 1 Second)		I_{FSM}	3	Amps
Operating & Storage Temperature		T_O and T_{STG}	-65 to +175	$^\circ\text{C}$
Thermal Impedance		Z_{qJX}	35	$^\circ\text{C/W}$


NOTES:

^{1/} For Ordering Information, Price, Operating Curves, and Availability- Contact Factory.


^{2/} Screening Based on MIL-PRF-19500. Screening Flows Available on Request.

^{3/} Unless Otherwise Specified, All Electrical Characteristics @25°C.

Axial Leaded



SMS



NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0109B

DOC

**Solid State Devices, Inc.**

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

**SPD645-1 thru SPD649-1
 and
 SPD645-1SMS thru SPD649-1SMS**



ELECTRICAL CHARACTERISTICS ^{3/}

CHARACTERISTICS		SYMBOL	VALUE	UNIT
Minimum Breakdown Voltage (100 μ A)	645-1	B_V	275	Volts
	646-1		360	
	647-1		480	
	648-1		600	
	649-1		720	
Maximum Forward Voltage Drop (I _F = 400mA)		V_F	1.0	Volts
Maximum Reverse Leakage Current (Rated V _R , T _A = +25°C)		I_{R1}	200	nA
Maximum Reverse Leakage Current (Rated V _R , T _A = +100°C)	645-1	I_{R2}	15	μ A
	646-1		15	
	647-1		20	
	648-1		20	
	649-1		25	
Typical Junction Capacitance (-12 V)		C_O	9	pF

NOTES:

- 1/ For Ordering Information, Price, Operating Curves, and Availability- Contact Factory.
2/ Screening Based on MIL-PRF-19500. Screening Flows Available on Request.
3/ Unless Otherwise Specified, All Electrical Characteristics @25°C.

Package Outlines:

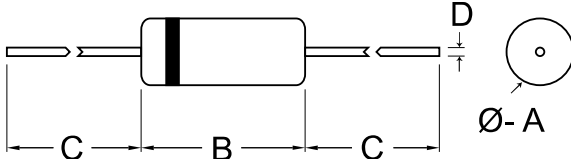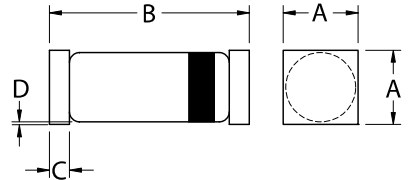DIMENSIONS (inches)			DIMENSIONS (inches)		
DIM.	Minimum	Maximum	DIM.	Minimum	Maximum
A	.060	.090	A	.098	.102
B	.120	.200	B	.170	.250
C	1.00	---	C	.022	.028
D	.018	.022	D	.002	---
AXIAL 			SMS 		

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0109B**DOC**