




Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

DESIGNER'S DATA SHEET

Part Number / Ordering Information ^{1/}

SDR55U

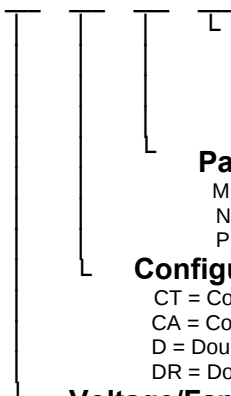

Screening ^{2/}

— = Not Screened
 TX = TX Level
 TXV = TXV Level
 S = S Level

Package Type

M = TO-254
 N = TO-258
 P = TO-259

Configuration

CT = Common Cathode
 CA = Common Anode
 D = Doubler
 DR = Doubler Reverse

Voltage/Family

080 = 800V
 090 = 900V
 100 = 1000V
 110 = 1100V
 120 = 1200V

SDR55U080CT thru SDR55U120CT Series

55 AMP ULTRA FAST CENTERTAP RECTIFIER

800 - 1200 Volts


50 nsec

Features:


- Ultra Fast Recovery: 35 nsec typical
- High Surge Rating
- Low Reverse Leakage Current
- Low Forward Voltage Drop
- Low Junction Capacitance
- Hermetically Sealed Package
- Gold Eutectic Die Attach available
- Ultrasonic Aluminum Wire Bonds
- Ceramic Seals for improved hermeticity available
- Available in Centertap and Doubler versions
- TX, TXV, Space Level Screening Available Consult Factory.

Maximum Ratings		Symbol	Value	Units
Peak Repetitive Reverse and DC Blocking Voltage	SDR55U080	V_{RRM}	800	Volts
	SDR55U090		900	
	SDR55U100	V_{RWM}	1000	
	SDR55U110		1100	
	SDR55U120	V_R	1200	
Average Rectified Forward Current (Resistive Load, 60 Hz Sine Wave, $T_A = 25^\circ\text{C}$) ^{3/4/}		I_o	55	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave, Allow Junction to Reach Equilibrium Between Pulses, $T_A = 25^\circ\text{C}$)		I_{FSM}	250	Amps
Operating & Storage Temperature		Top & Tstg	-65 to +200	$^\circ\text{C}$
Maximum Thermal Resistance Junction to Case, each individual diode Junction to Case ^{3/}		$R_{\theta JE}$	1.25 1.0	$^\circ\text{C/W}$


TO-254 (M)



TO-258 (N)



TO-259 (P)

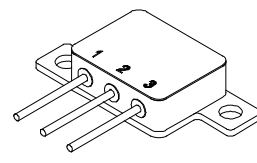

^{1/} For ordering information, price, operating curves, and availability - Contact factory.

^{2/} Screening based on MIL-PRF-19500. Screening flows available on request.

^{3/} Both legs tied together.

^{4/} Package limited.

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RU0119D

DOC



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638

Phone: (562) 404-4474 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

SDR55U080CT thru SDR55U120CT Series

Electrical Characteristics (per leg)		Symbol	Typ	Max	Units
Instantaneous Forward Voltage Drop ($T_A = 25^\circ\text{C}$, 300 μsec pulse)	$I_F = 10\text{Adc}$	V_{F1}	1.75	1.9	Volts
	$I_F = 20\text{Adc}$		1.85	2.1	
	$I_F = 50\text{Adc}$		2.1	2.5	
Instantaneous Forward Voltage Drop ($T_A = -55^\circ\text{C}$, 300 μsec pulse)	$I_F = 10\text{Adc}$	V_{F2}	1.75	1.95	Volts
	$I_F = 20\text{Adc}$		1.85	2.1	
	$I_F = 50\text{Adc}$		2.05	2.5	
Instantaneous Forward Voltage Drop ($T_A = 125^\circ\text{C}$, 300 μsec pulse)	$I_F = 10\text{Adc}$	V_{F3}	1.3	1.6	Volts
	$I_F = 20\text{Adc}$		1.52	1.8	
	$I_F = 50\text{Adc}$		1.88	2.35	
Reverse Leakage Current (Rated V_R , $T_A = 25^\circ\text{C}$, 300 μsec pulse minimum)		I_{R1}	20	100	μA
Reverse Leakage Current (Rated V_R , $T_A = 100^\circ\text{C}$, 300 μsec pulse minimum)		I_{R2}	1.5	—	mA
Reverse Leakage Current (Rated V_R , $T_A = 125^\circ\text{C}$, 300 μsec pulse minimum)		I_{R3}	5	20	mA
Reverse Leakage Current (Rated V_R , $T_A = 150^\circ\text{C}$, 300 μsec pulse minimum)		I_{R4}	15	—	mA
Junction Capacitance ($V_R = 5\text{ Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1\text{MHz}$) ($V_R = 10\text{ Vdc}$, $T_A = 25^\circ\text{C}$, $f = 1\text{MHz}$)		C_J	50	—	pF
			45	75	
Reverse Recovery Time ($I_F = 500\text{ mA}$, $I_R = 1\text{A}$, $I_{RR} = 0.25\text{A}$) ($I_F = 500\text{ mA}$, $I_R = 1\text{A}$, $I_{RR} = 0.25\text{A}$) ($I_F = 10\text{ A}$, $dI_F / dt = 100\text{A}/\mu\text{s}$) ($I_F = 10\text{ A}$, $dI_F / dt = 100\text{A}/\mu\text{s}$) ($I_F = 10\text{ A}$, $dI_F / dt = 100\text{A}/\mu\text{s}$) ($I_F = 10\text{ A}$, $dI_F / dt = 100\text{A}/\mu\text{s}$)	$T_A = 25^\circ\text{C}$	t_{rr1}	35	50	nsec
	$T_A = 100^\circ\text{C}$	t_{rr2}	100	--	
	$T_A = 25^\circ\text{C}$	t_{rr3}	50	--	
	$T_A = 25^\circ\text{C}$	I_{RM3}	3.7	--	
	$T_A = 100^\circ\text{C}$	t_{rr4}	110	--	
	$T_A = 100^\circ\text{C}$	I_{RM4}	6	--	

NOTE: All specifications are subject to change without notification.
SSD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RU0119D

DOC




Solid State Devices, Inc.


14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SDR55U080CT thru SDR55U120CT Series


Case Outline: TO-254

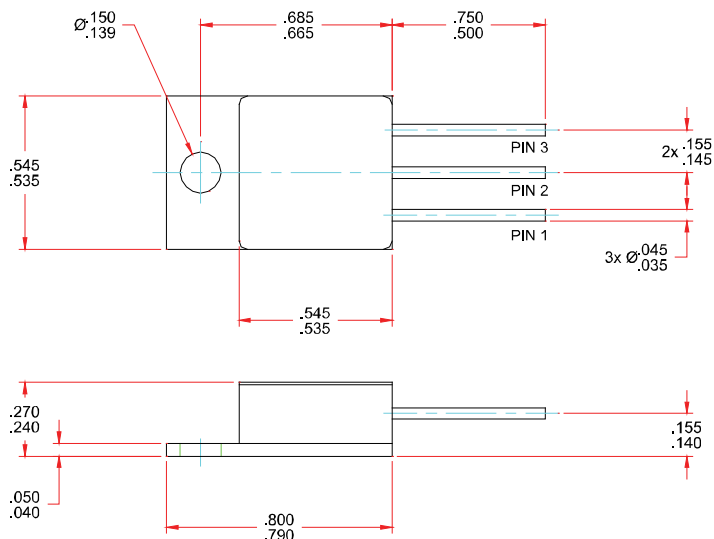

Case Outline: TO-258

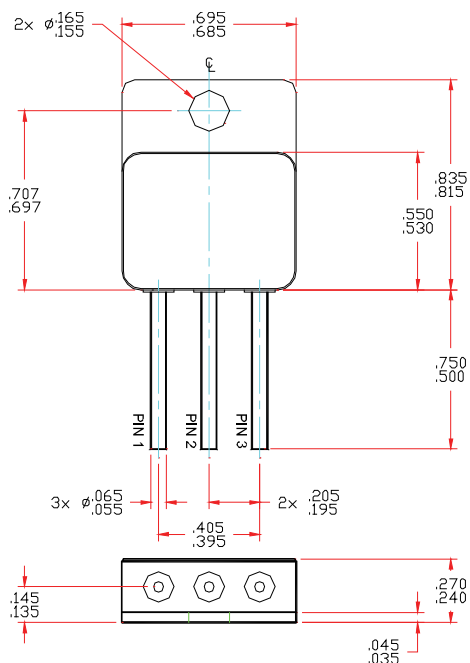

Case Outline: TO-259

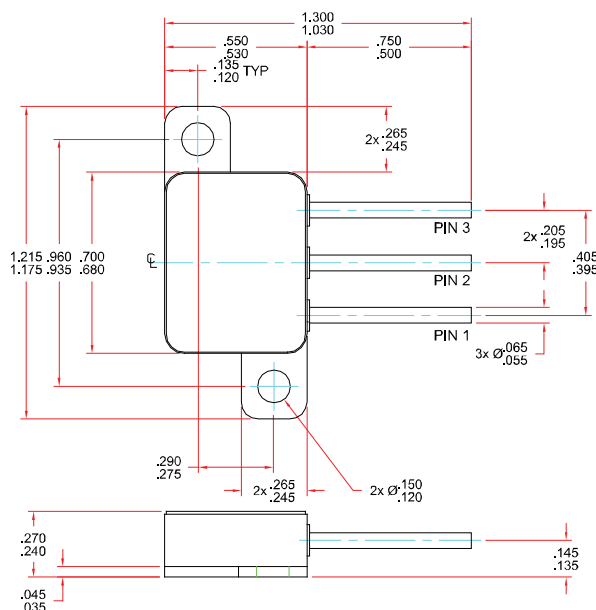

PIN ASSIGNMENT

Code	Function	Pin 1	Pin 2	Pin 3
CT	Common Cathode	Anode	Cathode	Anode
CA	Common Anode	Cathode	Anode	Cathode
D	Doubler	Cathode	Anode / Cathode	Anode
DR	Doubler Reverse	Anode	Cathode / Anode	Cathode

NOTE: All specifications are subject to change without notification.
SSD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RU0119D

DOC