

**SDR936CT/3
 thru
 SDR939CT/3**

Designer's Data Sheet


FEATURES:

- Soft Recovery Diode
- Ultrafast Recovery: 80 nsec Maximum
- Available in faster recovery versions
- High Surge Rating
- Low Reverse Leakage Current
- Low Junction Capacitance
- Hermetically Sealed Package
- Gold Eutectic Die Attach available
- Ultrasonic Aluminum Wire Bonds

- TX, TXV and Space Level Screening Available

**30 AMP
 600-900 VOLTS
 80 nsec
 ULTRA FAST
 CENTERTAP RECTIFIER**

TO-3



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage SDR936CT/3 SDR937CT/3 SDR938CT/3 SDR939CT/3	VRRM VRWM VR	 600 700 800 900	 Volts
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	60	Amps
Peak Surge Current (per leg) (8.3 ms Pulse, Half Sine Wave, TA=25°C)	IFSM	600	Amps
Operating and storage temperature	Top & Tstg	-65 to +200	°C
Maximum Thermal Resistance Junction to Case, each individual diode Junction to Case, note 1	RθJC	1.6 1.0	°C/W

note 1 Both legs tied together

SDR936CT/3 thru SDR939CT/3

PRELIMINARY



SOLID STATE DEVICES, INC



14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS (Per Leg)

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 15 Adc, TA=25°C, 300ms Pulse) (IF = 30 Adc, TA=25°C, 300ms Pulse)	VF	1.2 1.3	Vdc
Instantaneous Forward Voltage Drop (IF = 15 Adc, TA=100°C, 300ms Pulse) (IF = 15 Adc, TA= - 55°C, 300ms Pulse)	VF	1.1 1.3	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300ms pulse minimum)	IR	100	μA
Reverse Leakage Current (Rated VR, TA=100°C, 300ms pulse minimum)	IR	10	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f= 1 MHz)	CJ	100	pf
Reverse Recovery Time (IF=500mA, IR=1 A, IRR=250mA, TA=25°C)	trr	80	nsec

CASE OUTLINE: TO-3

PIN 1: ANODE 1
CASE: CATHODE
PIN 3: ANODE 2

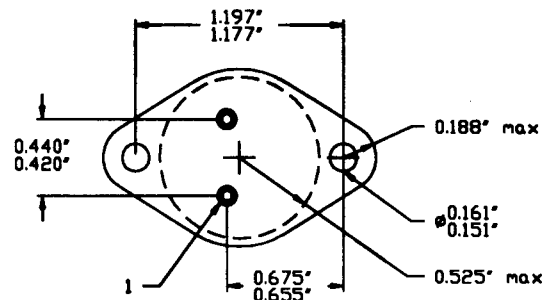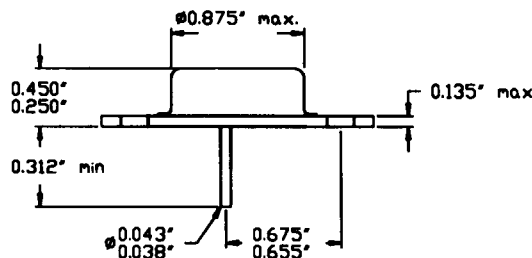

TYPICAL OPERATING CURVES

TA=25°C Unless otherwise specified

