



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet

Part Number / Ordering Information ^{1/}

SDH — F — —

— Screening^{2/} = None
TX = TX Level
TXV = TXV Level
S = S Level

— Package
— = Axial
SMS = Surface Mount Square Tab

— Recovery Time
F = Fast Recovery

— Voltage
20 = 2000 V
25 = 2500 V
30 = 3000 V
40 = 4000 V
50 = 5000 V
60 = 6000 V

SDH20F & FSMS thru SDH60F & FSMS

**1-1.5 AMP
2000-6000 VOLTS
FAST RECOVERY
HIGH VOLTAGE
RECTIFIER**

FEATURES:

- Fast Recovery: 180 nsec Maximum
- PIV to 6000 Volts
- Hermetically Sealed Axial and Surface Mount Package
- Void-Free Construction
- Metallurgically Bonded
- 175°C Maximum Operating Temperature
- Replacement for 1N6512 thru 1N6518 and 1N6520 thru 1N6526 in Many Applications
- TX, TXV, and Space Level Screening Available^{2/}
- Available in Ultra Fast and Hyper Fast Versions. Contact Factory.

ELECTRICAL CHARACTERISTICS

Part Number	Peak Inverse Voltage	Average Rectifier Current		Maximum Reverse Current		Maximum Forward Voltage	Maximum Surge Current (1 Cycle)	Maximum Reverse Recovery Time	Maximum Junction Capacitance	Typical Thermal Impedance	
Symbol	PIV	I _O		I _R		V _F	I _{FSM}	t _{RR}	C _J	θ _{JE}	θ _{JL}
Units		A		μA		Volts	Amps	nsec	pF	°C/W	
Conditions	Volts	25°C	100°C	25°C	100°C	25°C	25°C	25°C	VR = 100V f _T = 1MHZ		L = 3/8"
SDH20F	2000	1.5	1.0	1.0	15	6.0	60	180	10	4	8
SDH25F	2500	1.5	1.0	1.0	15	6.0	60	180	10	4	8
SDH30F	3000	1.5	1.0	1.0	15	6.0	60	180	10	4	8
SDH40F	4000	1.0	0.5	1.0	15	9.5	40	180	8	4	8
SDH50F	5000	1.0	0.5	1.0	15	9.5	40	180	8	4	8
SDH60F	6000	1.0	0.5	1.0	15	9.5	40	180	8	4	8

^{1/} For Ordering Information, Price, and Availability – Contact Factory.

^{2/} Screening based on MIL-PRF-19500. Screening flows available on request.

^{3/} Operating and testing over 10,000 V/inch may require encapsulation or immersion in a suitable dielectric material.


^{4/} I_F = I_O; Max. forward voltage measured with instantaneous forward pulse of 300μsec minimum.

^{5/} Max. Lead/End Tab temp. for soldering is 250°C, 3/8" from case for 5 sec maximum.


^{6/} Operating and storage temperature: -65°C to +175°C.

^{7/} Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, IRR=.25A, T_A=25°C.

Axial



Surface Mount Square Tab



NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0058D

DOC




Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
Phone: (562) 404-4474 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com


SDH20F & FSMS thru SDH60F & FSMS

PACKAGE OUTLINE: Axial

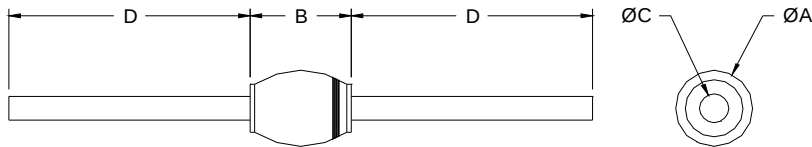

DIMENSIONS		
DIM	MIN	MAX
A	---	0.180"
B	.230"	.270"
C	0.047"	0.053"
D	1.00"	—

PACKAGE OUTLINE: Surface Mount Square Tab

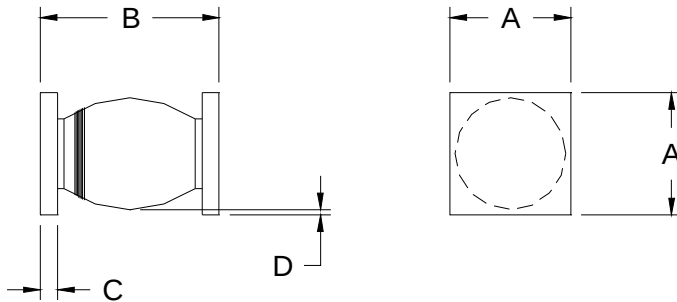

DIMENSIONS		
DIM	MIN	MAX
A	0.195"	0.205"
B	0.280"	0.320"
C	0.020"	0.030"
D	0.002"	—

Notes:

Consult manufacturing for operating curves.

NOTE: All specifications are subject to change without notification.
SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0058D

DOC