





PRELIMINARY

SOLID STATE DEVICES, INC14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424**Designer's Data Sheet****FEATURES:**

- Rugged construction with poly silicon gate
- Low RDS(on) and high transconductance
- Excellent high temperature stability
- Very fast switching speed
- Fast recovery and superior dv/dt performance
- Increased reverse energy capability
- Low input and transfer capacitance for easy paralleling
- Hermetically sealed power package
- TX, TXV and Space Level screening available
- Replaces: IRF250 Types

SFF250C
30 AMP
200 VOLTS
0.085 Ω
N-CHANNEL
POWER MOSFET
TO-254C**MAXIMUM RATINGS**

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Drain to Source Voltage	V _{DS}	200	Volts
Gate to Source Voltage	V _{GS}	± 20	Volts
Continuous Drain Current	I _D	30	Amps
Operating and Storage Temperature	T _{OP} & T _{STG}	-55 to +150	°C
Thermal Resistance, Junction to Case	R _{θJC}	1	°C/W
Total Device Dissipation @ TC=25°C Total Device Dissipation @ TC=55°C	P _D	125 95	Watts

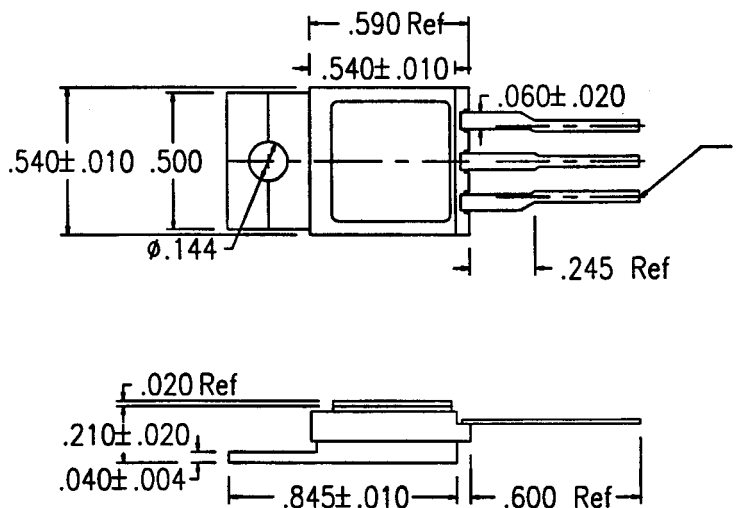PACKAGE OUTLINE: CERAMIC TO-254**PIN OUT:**
PIN 1: DRAIN
PIN 2: SOURCE
PIN 3: GATE


NOTE: All specifications are subject to change without notification. SSDI's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: F00053 B**MED**

SFF250C

PRELIMINARY

**SOLID STATE DEVICES, INC**
 14849 Firestone Boulevard · La Mirada, CA 90638
 Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424
ELECTRICAL CHARACTERISTICS @ T_J=25° C (Unless Otherwise Specified)

RATING		SYMBOL	MIN	TYP	MAX	UNIT
Drain to Source Breakdown Voltage (V _{GS} =0 V, I _D =250μA)		BV _{DSS}	200	---	---	V
Drain to Source on State Resistance (V _{GS} =10 V, I _D =60% Rated I _D)		R _{DS(on)}	---	0.08	0.085	Ω
On State Drain Current (V _{DS} > I _{D(on)} X R _{DS(on)} Max, V _{GS} =10 V)		I _{D(on)}	30	---	---	A
Gate Threshold Voltage (V _{DS} =V _{GS} , I _D =250μA)		V _{GS(th)}	2	3	4	V
Forward Transconductance (V _{DS} > I _{D(on)} X R _{DS(on)} Max, I _{DS} =60% rated I _D)		g _{fs}	13	15	---	S(Ω)
Zero Gate Voltage Drain Current (V _{DS} =80% rated voltage, V _{GS} =0 V) (V _{DS} =80% rated V _{DS} , V _{GS} =0 V, T _A =125° C)		I _{DSS}	---	---	250 1000	μA
Gate to Source Leakage Forward Gate to Source Leakage Reverse	At rated V _{GS}	I _{GSS} -	---	---	100 -100	nA
Total Gate Charge Gate to Source Charge Gate to Drain Charge	V _{GS} =10 Volts 50% rated V _{DS} Rated I _D	Q _g Q _{gs} Q _{gd}	---	80 12 44	120 20 65	nC
Turn on Delay Time Rise Time Turn Off Delay Time Fall Time	V _{DD} =50% rated V _{DS} 50% rated I _D R _G = 6.2 Ω	t _{d(on)} t _r t _{d(off)} t _f	---	20 120 70 80	30 180 100 120	nsec
Diode Forward Voltage (I _S =rated I _D , V _{GS} =0 V, T _J =25° C)		V _{SD}	---	1.1	2.0	V
Diode Reverse Recovery Time Reverse Recovery Charge	T _J =25° C I _F =10A di/dt=100 A/μsec	t _{rr} Q _{RR}	140 1.8	300 3.8	630 8	nsec μC
Input Capacitance Output Capacitance Reverse Transfer Capacitance	V _{GS} =0 Volts V _{DS} =25 Volts f= 1 MHz	C _{iss} C _{oss} C _{rss}	---	2600 650 150	---	pF

For thermal derating curves and other characteristic curves please contact SSDI Marketing Department.