


X00136 08

SFT1016	SFT1018	SFT1020	SSDI
100 AMP			
HIGH ENERGY NPN TRANSISTORS			14849 FIRESTONE BLVD.
350 VOLTS			LA MIRADA, CA 90638
			TEL: (213) 921-9660
			FAX: (213) 921-2396

CASE STYLE T0-3



FEATURES

- ▶ BVCEO 160 - 200 VOLTS
- ▶ 300 WATTS POWER DISSIPATION
- ▶ EXCELLENT SOA CURVE
- ▶ Es/b OF 400mJ
- ▶ GAIN OF OVER 5 AT 100 AMPS
- ▶ HIGH-REL CONSTRUCTION INCLUDING GOLD EUTECTIC DIE MOUNTING. ALUMINUM WIRING
- ▶ PLANAR CHIP CONSTRUCTION WITH LOW LEAKAGE AND VERY FAST SWITCHING

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Collector-Emitter Voltage SFT1016 SFT1018 SFT1020	VCEO	160 180 200	Volts
Collector-Base Voltage	VCBO	350	Volts
Emitter-Base Voltage	VEBO	8	Volts
Collector Current	IC	100	Amps
Base Current	IB	35	Amps
Total Device Dissipation @ Tc = 50 °C Derate Above 50 °C	PD	300 2	Watts W/ °C
Operating and Storage Temperature	TJ, Tstg	-65 to +200	°C

THERMAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Thermal Resistance, Junction to Case	RθJC	0.5	°C/W

ELECTRICAL CHARACTERISTICS


Characteristics	Symbol	Min	Max	Unit
Collector-Emitter Breakdown Voltage* (IC = 200mA _{DC})	BVCEO	160 180 200		Volts
Collector-Base Breakdown Voltage (IC = 100uA _{DC})	BVCBO	350		Volts

ELECTRICAL CHARACTERISTICS

Characteristics		Symbol	Min	Max	Unit
Emitter-Base Breakdown Voltage ($I_E = 100\mu A$)		BVEBO	8		Vdc
Collector Cutoff Current ($V_{CB} = 350V$)		ICBO		10	μA
Emitter Cutoff Current ($V_{EB} = 7V$)		IEBO		10	μA
DC Current Gain* ($I_C = 10A$, $V_{CE} = 2V$) ($I_C = 50A$, $V_{CE} = 5V$) ($I_C = 100A$, $V_{CE} = 5V$)		hFE	40 30 7		
Collector-Emitter Saturation Voltage* ($I_C = 50A$, $I_B = 5A$) ($I_C = 100A$, $I_B = 10A$)		VCE(SAT)		2 4	Vdc
Base-Emitter Saturation Voltage* ($I_C = 100A$, $I_B = 10A$)		VBE(SAT)		2.5	Vdc
Current Gain Bandwidth Product ($I_C = 1A$, $V_{CE} = 10V$, $f = 10MHz$)		fT	40		MHz
Output Capacitance ($V_{CB} = 10V$, $I_E = 0A$, $f = 1MHz$)		Cob		1200	pf
Energy, Secondary Breakdown ($I_B = 1A$, $R_{B1} = R_{B2} = 20\Omega$) $V_{BE(off)} = 2.0V$, $L = 1.0mH$)		Es/b	400		mJ
Current, Secondary Breakdown ($V_{CE} = 20V$, $I_C = 15A$) ($V_{CE} = 100V$, $I_C = 0.4A$)		Is/b	1 1		sec
On Time	(VCC = 60Vdc, $I_C = 10A$, $I_{B1} = I_{B2} = 1.0A$)	ton		800	ns
Storage Time		ts		1500	ns
Fall Time		tf		400	ns

*Pulse Test: Pulse Width = 300us. Duty Cycle = 2%

PHYSICAL DIMENSIONS

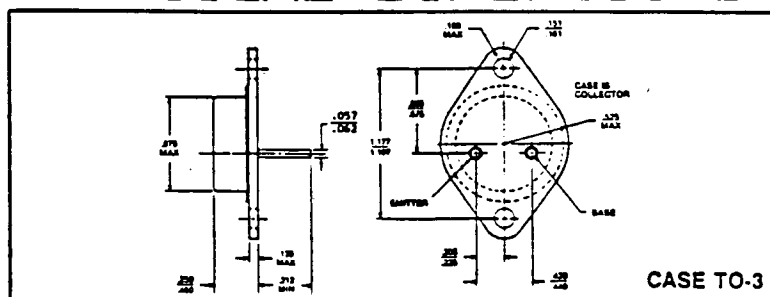

SSDI

SOLID STATE DEVICES, INC.

14849 FIRESTONE BOULEVARD
TELEPHONE: (213) 921-9660

LA MIRADA. CA 90638
FAX: (213) 921-2396