

# Rectangular Package Discrete LED

## RED, 2 x 3 mm

# BIVAR

### R3H~~X~~


- ◆ Rectangular Package
- ◆ RoHS Compliant
- ◆ Water Clear (**C**), Diffused (**D**), and Tinted (**T**) Lenses
- ◆ Available in Standard Lead Frame style
- ◆ Ideal for Status Indication and Bar Graph Displays
- ◆ Recommended for Bivar H-480C holder assemblies



Bivar Rectangular 2 x 3mm Package LED may be used in almost any application and is ideal for creating bar graph displays when arranged in linear LED arrays. Bivar offers water clear LED lens for maximum light output, diffused LED lens for uniform light output, and tinted lens to identify the color of the LED. The Standard Lead frame LED is ideal for vertical spacer assemblies and Right Angle Holder assemblies that require lead bends.

| Part Number | Material  | Emitted Color | Peak. Wavelength<br>$\lambda_p$ (nm) TYP. | Lens Appearance | Viewing Angle |
|-------------|-----------|---------------|-------------------------------------------|-----------------|---------------|
| R3HC        | GaAsP/GaP | RED           | 625nm                                     | Water Clear     | 80°           |
| R3HD        |           |               |                                           | Red Diffused    | 100°          |
| R3HT        |           |               |                                           | Red Tinted      | 80°           |

## Outline Dimensions

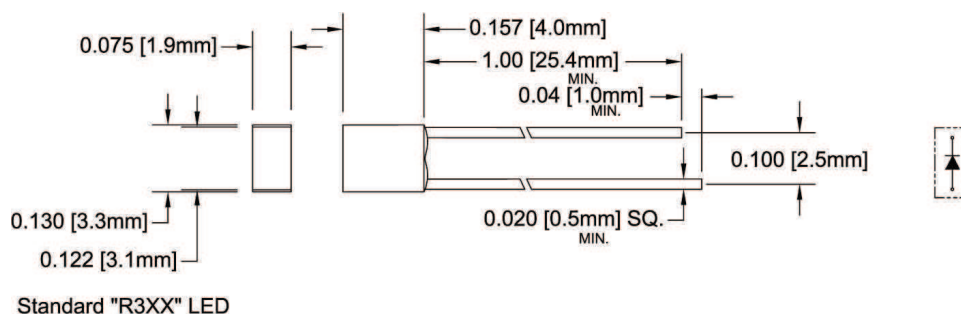


Recommended Mounting  
Hole Size =  $\varnothing.032^{+.003}_{-.002}$

#### Outline Drawings Notes:

1. All dimensions are in inches [millimeters].
2. Standard tolerance:  $\pm 0.010$ " unless otherwise noted.
3. Tolerance of overall epoxy outline:  $\pm 0.020$ " unless otherwise noted.
4. Epoxy meniscus may extend to 0.060" max.

## Part Number Designation

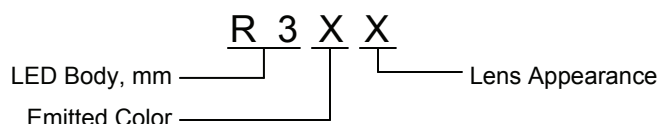

Bivar reserves the right to make changes at any time without notice.

# Rectangular Package Discrete LED RED, 2 x 3 mm



## Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

|                                                                                  |              |
|----------------------------------------------------------------------------------|--------------|
| Power Dissipation                                                                | 80 mW        |
| Forward Current ( DC )                                                           | 30 mA        |
| Peak Forward Current <sup>1</sup>                                                | 150 mA       |
| Reverse Voltage                                                                  | 5 V          |
| Operating Temperature Range                                                      | -25 ~ +85°C  |
| Storage Temperature Range                                                        | -30 ~ +100°C |
| Lead Soldering Temperature ( 3 mm from the base of the epoxy bulb ) <sup>2</sup> | 260°C        |

Notes: 1. 10% Duty Cycle, Pulse Width ≤ 0.1 msec.      2. Solder time less than 5 seconds at temperature extreme.

## Electrical / Optical Characteristics

T<sub>A</sub> = 25°C & I<sub>F</sub> = 20 mA unless otherwise noted

| Part Number | Forward Voltage (V) <sup>1</sup> |     |     | Recommend Forward Current (mA) |     |     | Reverse Current (μA) | Dominant Wavelength (nm) <sup>2</sup> |     |     | Luminous Intensity I <sub>v</sub> (mcd) |     |     | Viewing Angle 2 Θ ½ (deg) |
|-------------|----------------------------------|-----|-----|--------------------------------|-----|-----|----------------------|---------------------------------------|-----|-----|-----------------------------------------|-----|-----|---------------------------|
|             | MIN                              | TYP | MAX | MIN                            | TYP | MAX | MAX                  | MIN                                   | TYP | MAX | MIN                                     | TYP | MAX | TYP                       |
| R3HC        | /                                | 2.0 | 2.8 | /                              | 20  | /   | 100                  | /                                     | /   | /   | /                                       | 8   | /   | 80                        |
| R3HD        |                                  |     |     |                                |     |     |                      | /                                     | /   | /   | /                                       | 6   | /   | 100                       |
| R3HT        |                                  |     |     |                                |     |     |                      | /                                     | /   | /   | /                                       | 8   | /   | 80                        |

Notes: 1. Tolerance of forward voltage : ±0.05V.      2. Tolerance of dominant wavelength : ±1.0nm.

Bivar reserves the right to make changes at any time without notice.

# Rectangular Package Discrete LED

## RED, 2 x 3 mm



### Typical Electrical / Optical Characteristics

$T_A = 25^\circ\text{C}$  unless otherwise noted

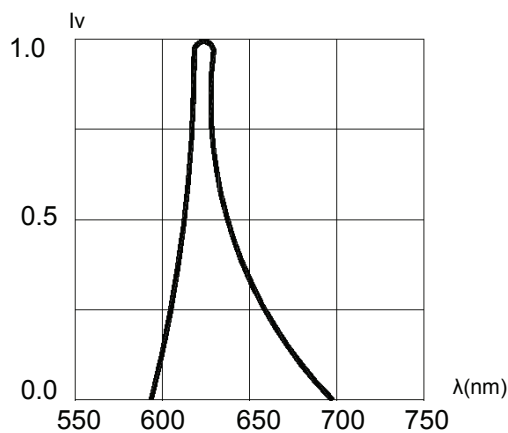


Fig. 1 Relative Luminous Intensity vs. Wavelength  
@ 20mA

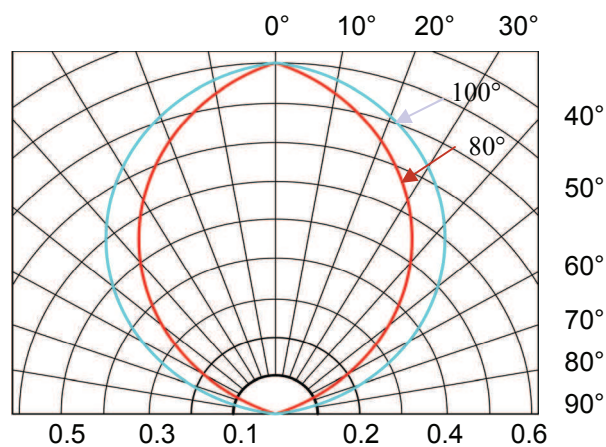


Fig. 2 Directivity Radiation Diagram

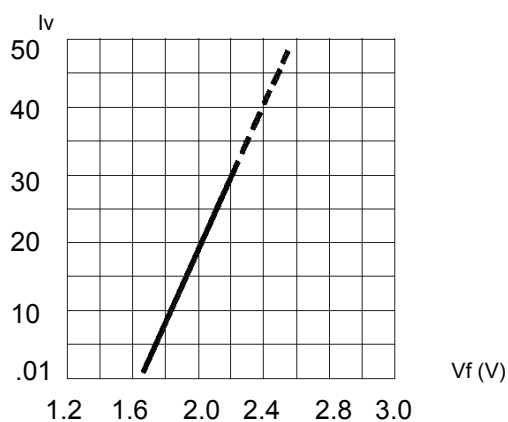


Fig. 3 Relative Intensity (10mA) vs.  
Forward Voltage

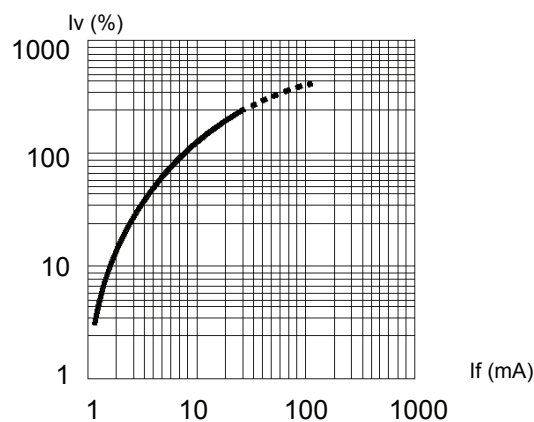


Fig. 4 Relative Luminous Intensity (%) vs.  
Forward Current

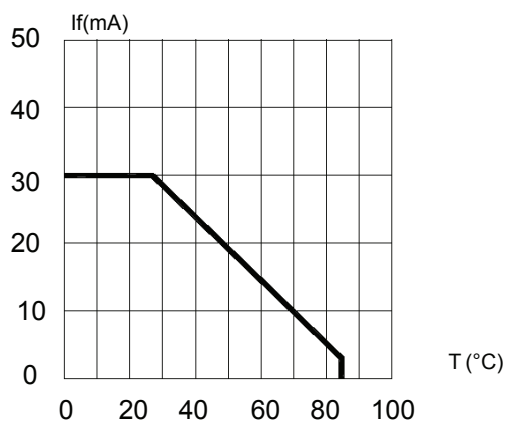


Fig. 5 Forward Current vs. Temperature

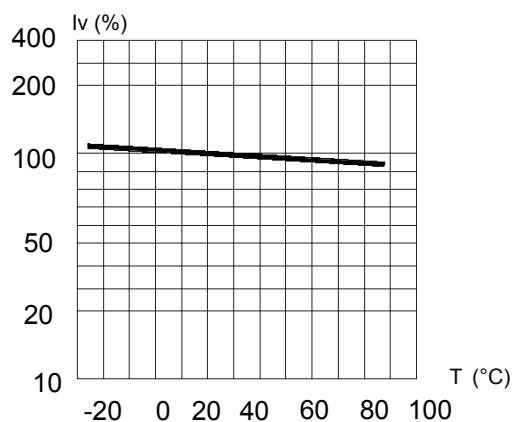



Fig. 6 Relative Intensity (%) vs. Temperature  
@ 20 mA

Bivar reserves the right to make changes at any time without notice.

# Rectangular Package Discrete LED RED, 2 x 3 mm




## Recommended Soldering Conditions

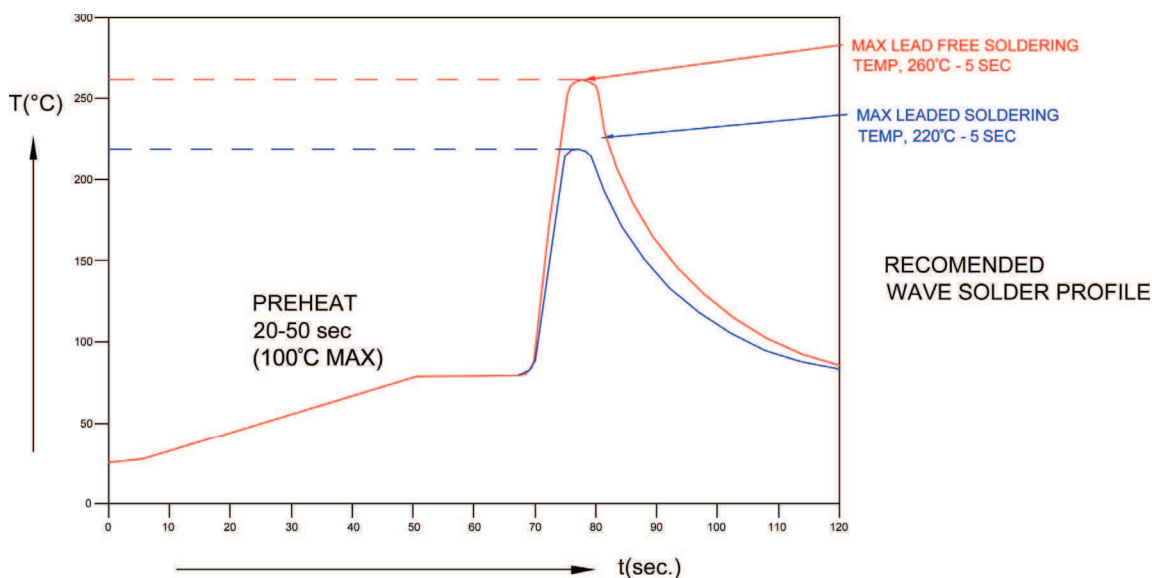

| Recommended Lead Free Wave Soldering Profile                                                       |                                         |
|----------------------------------------------------------------------------------------------------|-----------------------------------------|
| Preheat Temperature: 100°C Max.                                                                    | Peak Temperature: 260°C Max.            |
| Preheat Time: 20 ~ 50 Seconds                                                                      | Solder Time Above 217°C: 5 Seconds Max. |
| Note: Turn off top heater at preheat to prevent the lamp body directly exposed to the heat source. |                                         |

## Packaging and Labeling Plan

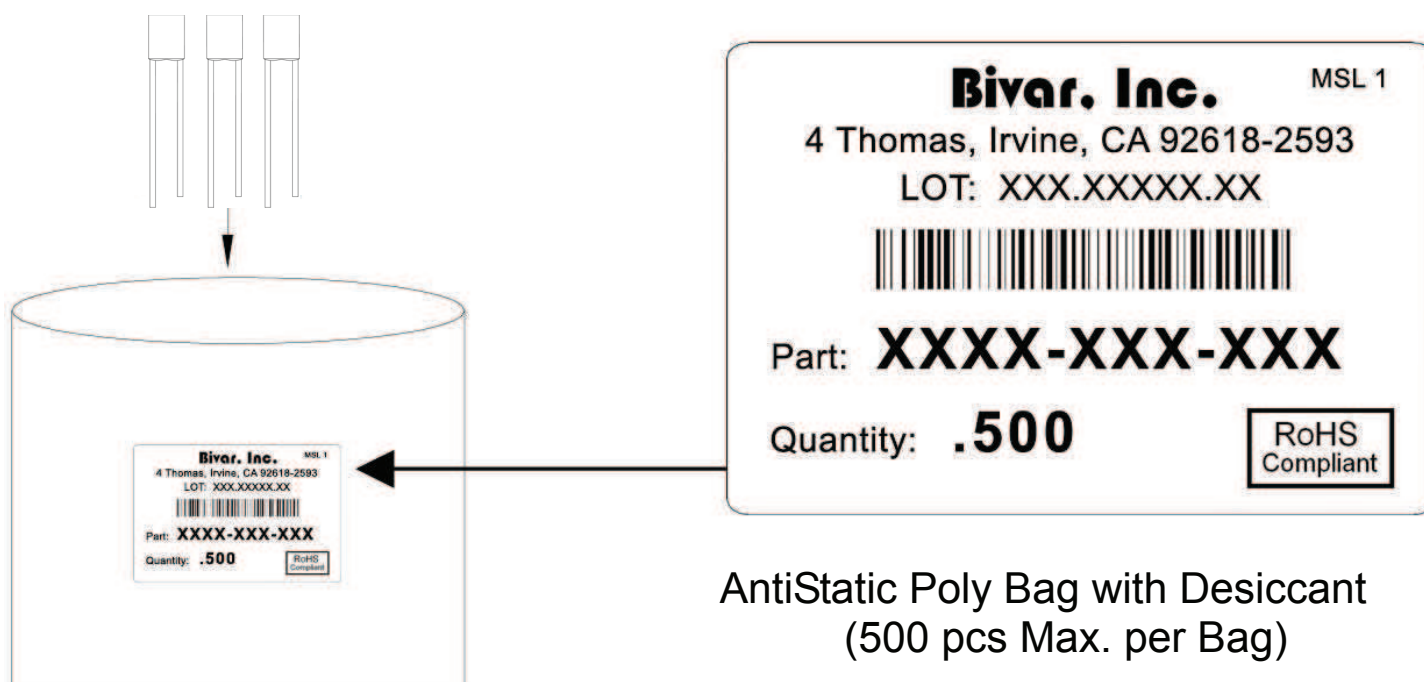

Bivar reserves the right to make changes at any time without notice.