

8 7 6 5 4 3 2 1





E

D

C

B

A

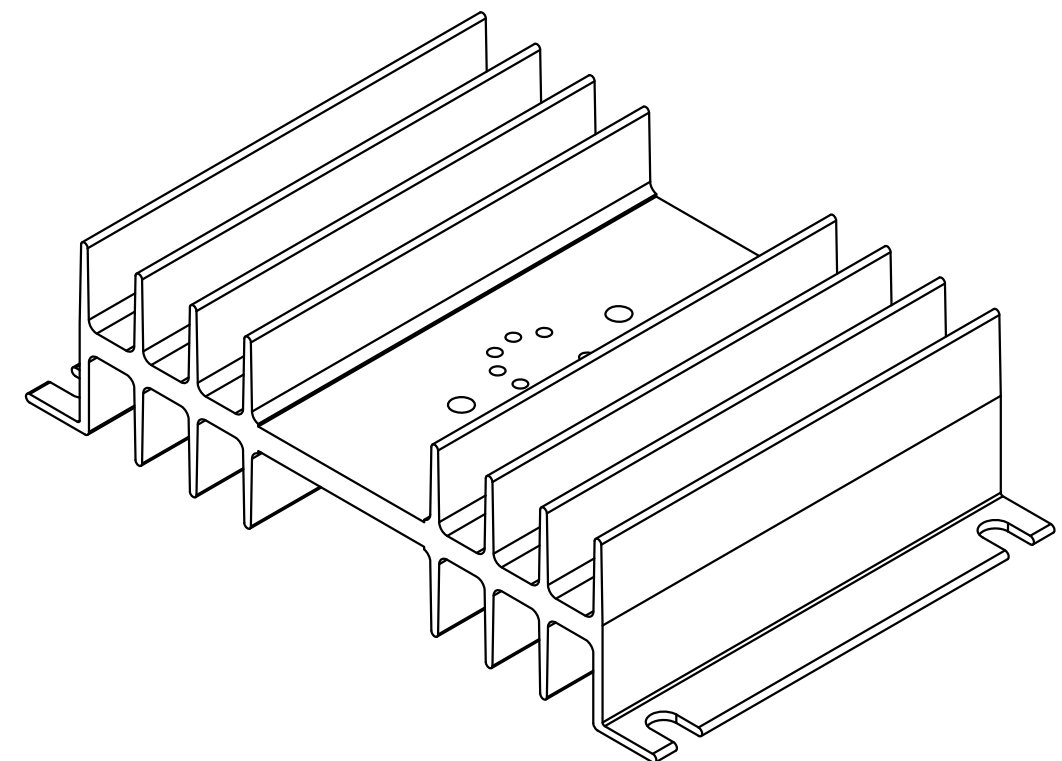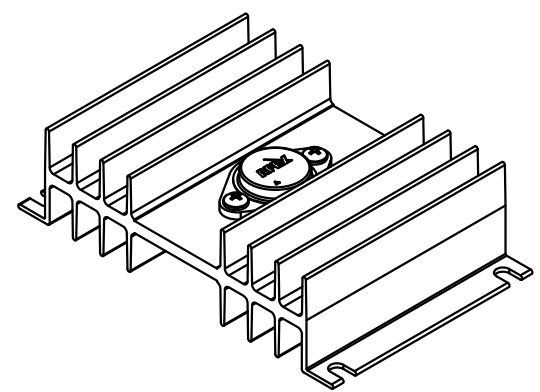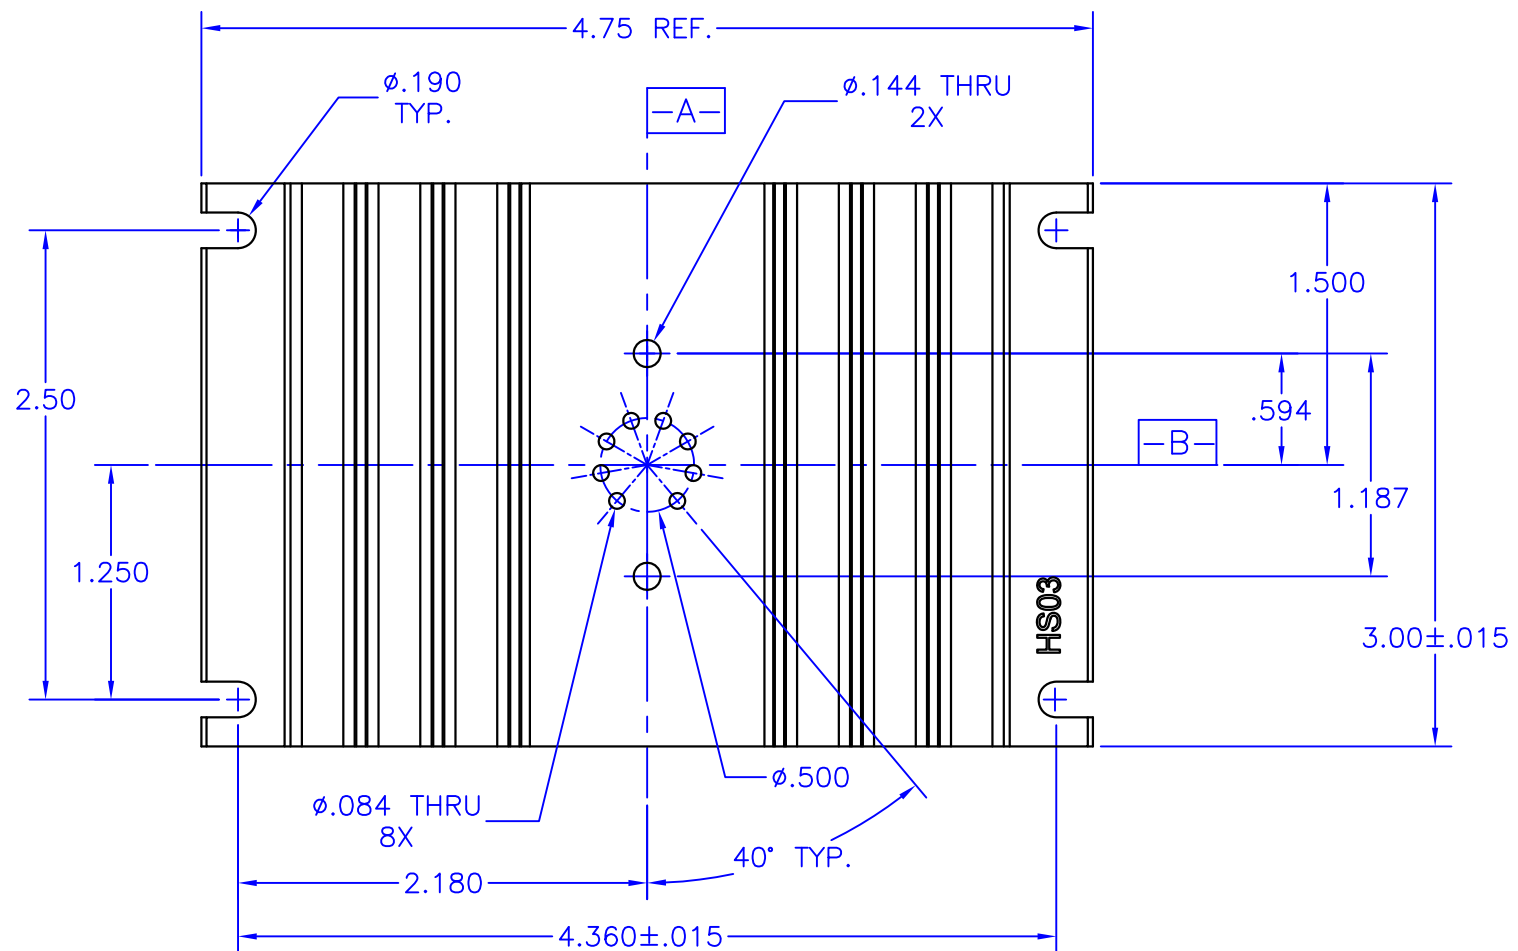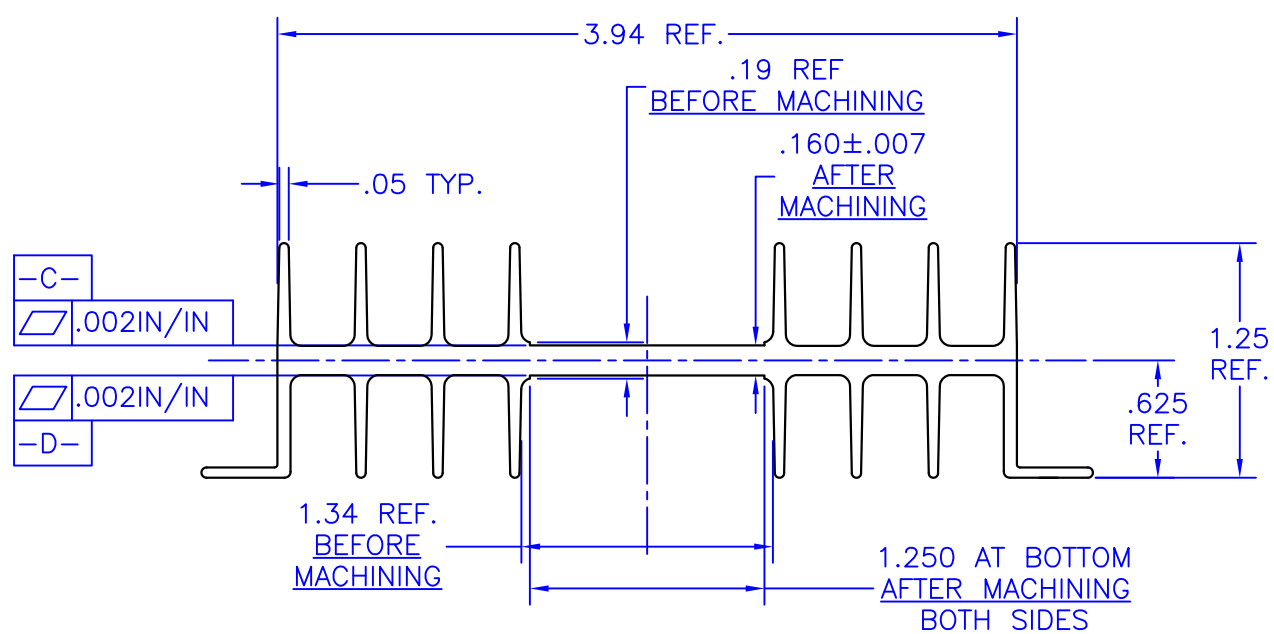

**NOTES:**

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: 6063-T5 aluminum (AAVID Thermalloy extrusion 60050)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black  
Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 6.2 oz [176g]

TOLERANCES - UNLESS OTHERWISE SPECIFIED .XX = ±.05 [.002] .XXX = ±.005 [.0002] ANG. = ±2°	TITLE: HEATSINK, TO-3		MODEL: HS03	
	SUBJECT: MECHANICAL DRAWING		REV: H	
APEX TECHNOLOGY PRECISION MANUFACTURING		ENGINEER: D-M	DCM: P.ECK	DATE: 14NOV12
		DCA: 12434	SH: 1 OF 1	FILENAME: HS03

8 7 6 5 4 3 2 1