
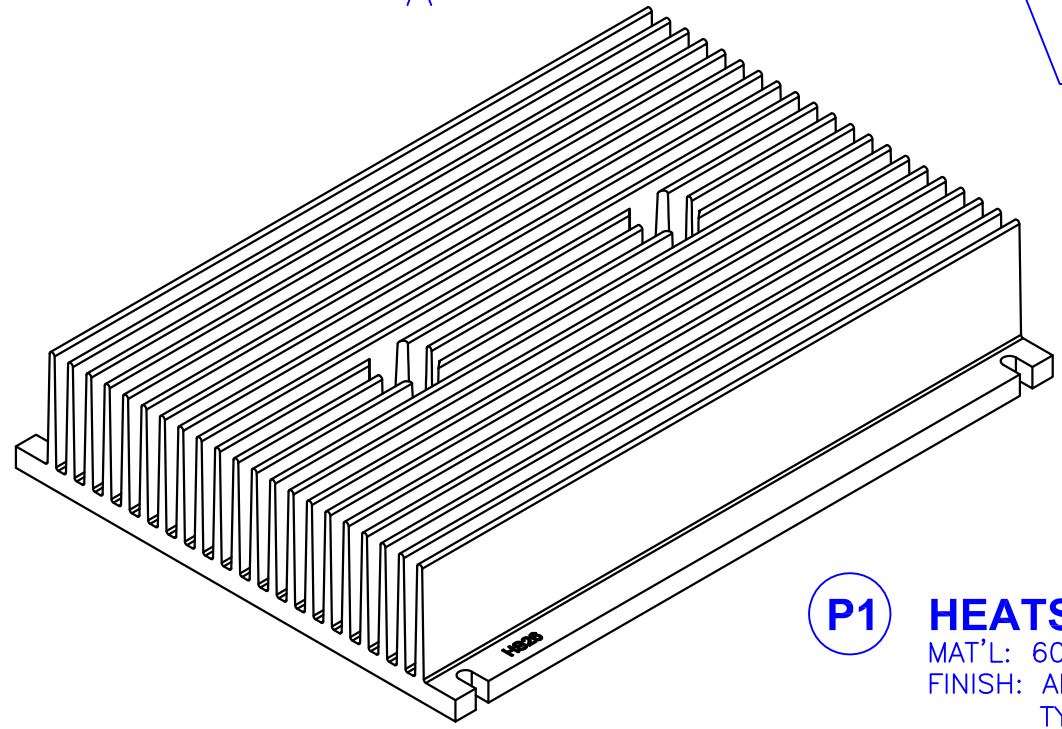
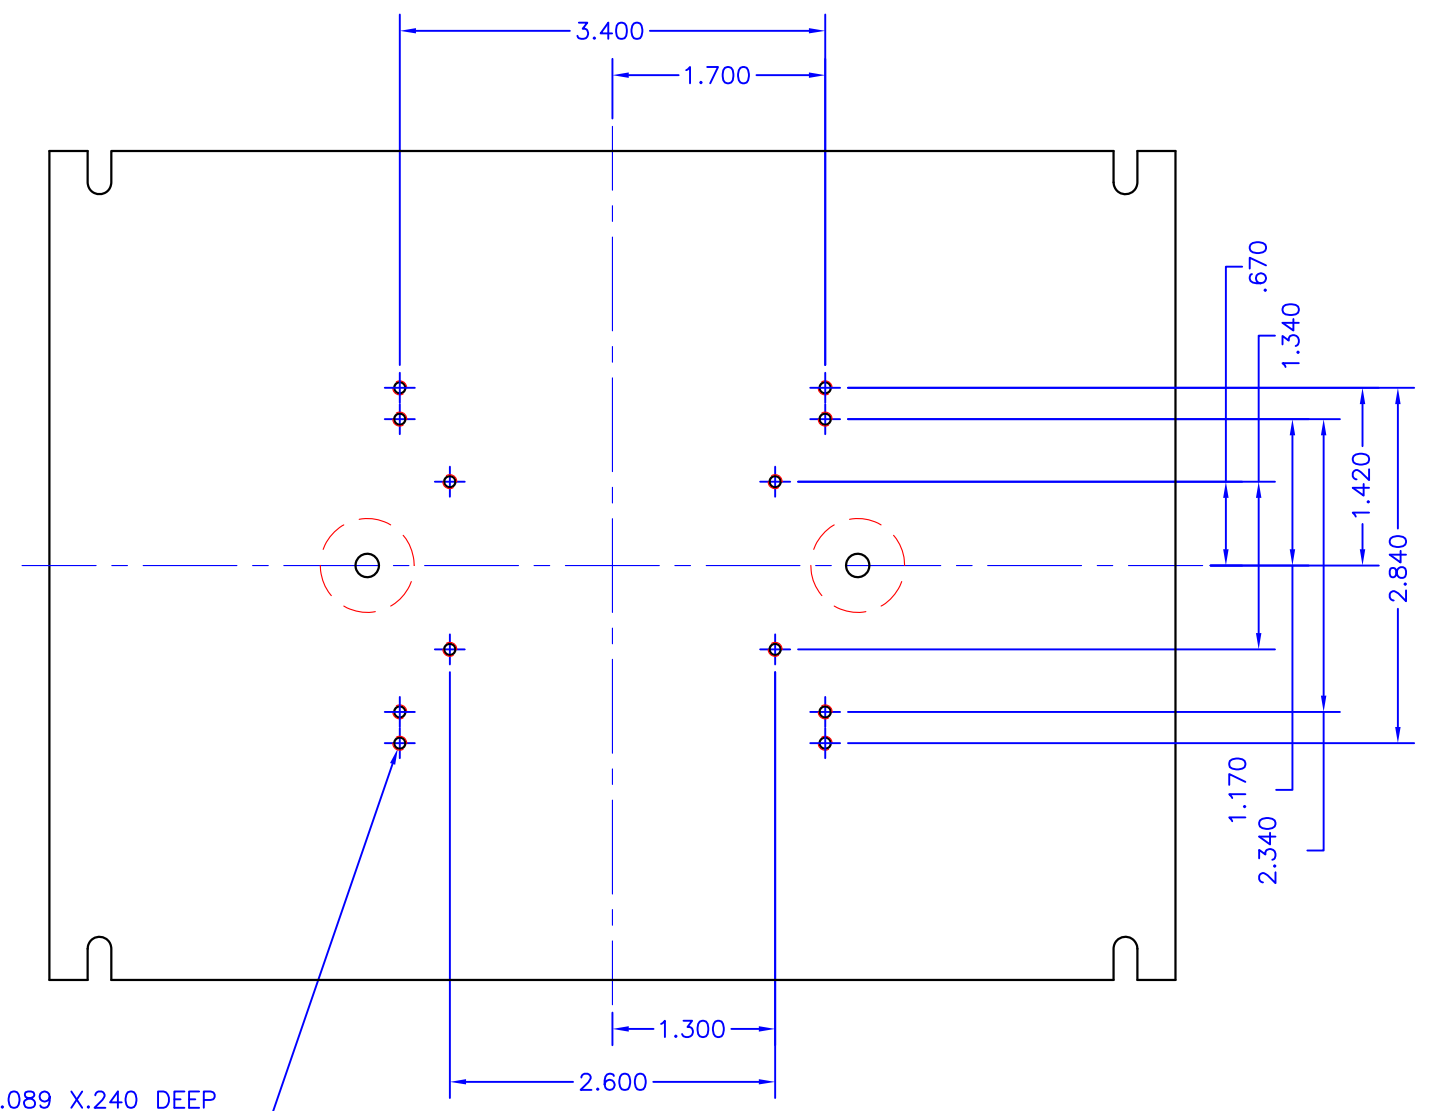
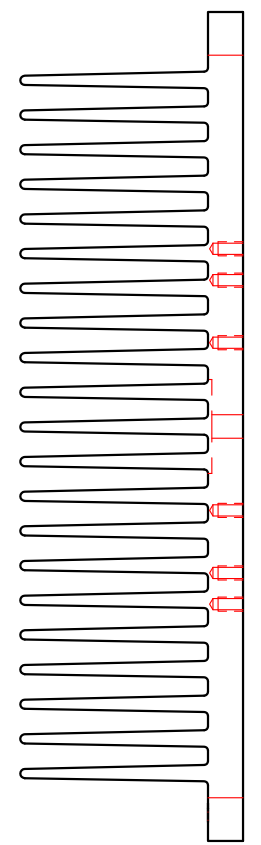


8 7 6 5 4 3 2 1

E
D
C
B
A


E
D
C
B
A

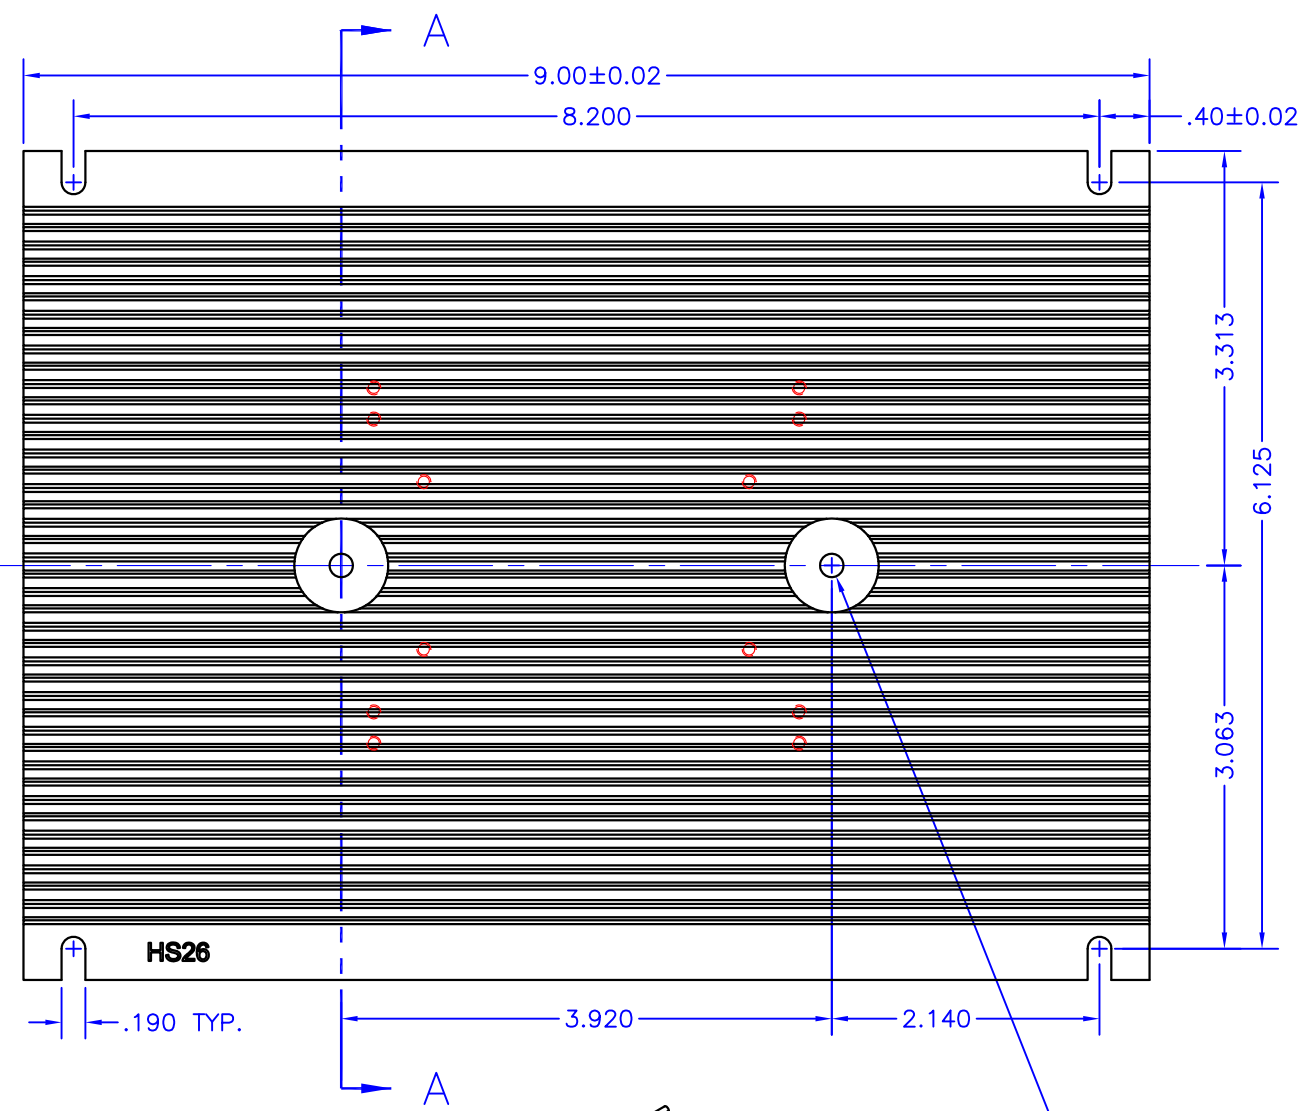

Ø.187 THRU
C'BORE Ø.75
X 1.53 DEEP
2 PLACES

Ø.089 X.240 DEEP
TAP 4-40 X .20 DEEP
12 PLACES

SECTION A-A

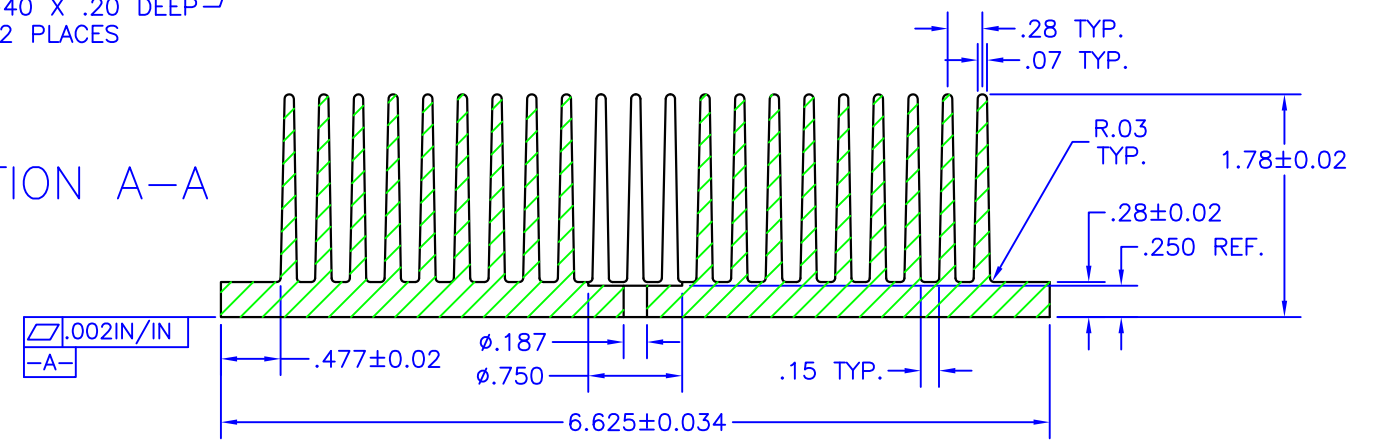

NOTES:

1. UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES.
2. BREAK ALL SHARP EDGES, DE-BURR & REMOVE LOOSE CHIPS.
3. MARK WITH CONTRASTING INK AS SHOWN, IF SPECIFIED BY PURCHASE ORDER.

P1 HEATSINK
 MAT'L: 6063-T5 ALUMINUM (AAVID EXTRUSION #69800)
 FINISH: ANODIZE PER MIL-A-8625, TYPE II, CL 2, BLACK
 TYPICAL BREAKDOWN VOLTAGE > 300V

| | | | | | |
|---|--|---------------------------------|--|----------------|--|
| TOLERANCES - UNLESS OTHERWISE SPECIFIED | | TITLE: MODULAR PACKAGE HEATSINK | | MODEL: HS26 | |
| .XX = ±.05 [.002] | | SUBJECT: MECHANICAL DRAWING | | DATE: 14NOV12 | |
| .XXX = ±.005 [.0002] | | ENGINEER: D-M | | REV: C | |
| ANG. = ±2° | | DRAWN BY: P.ECK | | FILENAME: HS26 | |
| | | DCI: 12436 | | SIC: 1 OF 1 | |

8 7 6 5 4 3 2 1