

SMD CRYSTAL

Ultrathin thickness 0.55mm.

It is a completely sealed type with a metal case sealed on a ceramic board.

Automatic mounting is possible.

Reflow is possible

RoHs compliant and lead free.


Part Numbering Example: CX252Z - A0 - B3 C3 -150 - 16.0 D12

CX252	Z	A0	B3	C3	150	16.0	D12	
SERIES	ADDED FEATURES	OPERATING TEMP.	STABILITY	TOLERANCE	RESISTANCE	FREQUENCY	LOAD CAP.	OVERTONE
CX252	Z = TAPE AND REEL	A0 = -10°C ~ +60°C	B3 = ± 30 B4 = ± 10	C3 = ± 30 C4 = ± 10	SEE TABLE 1 BELOW		D9, D12, ETC.	BLANK: FUND.

**NOTE: The above ABC combinations cover basic specification options. We tailor our crystals specifications to meet customer requirements. Please contact our sales department if you don't see exactly what you need.*

Specifications:

Frequency Range:	12.0 ~ 80.0 MHz
Vibration Mode:	AT cut, Fundamental
Frequency Tolerance: (at 25°C)	-/+ 10ppm, +/- 30 ppm, or specify
Equivalent Series Resistance:	See table No. 1
Frequency Stability:	-/+ 10 ppm, +/- 30 ppm, or specify
Operating Temperature Range:	-10~ + 60°C , or specify
Shunt Capacitance:	3.5pF max.
Load Capacitance:	9pF, 12pF, or specify
Aging:	-/+2ppm/year, +/- 5ppm/year
Drive Level:	100uW max.
Min. Packaging	2,500 pcs / Reel

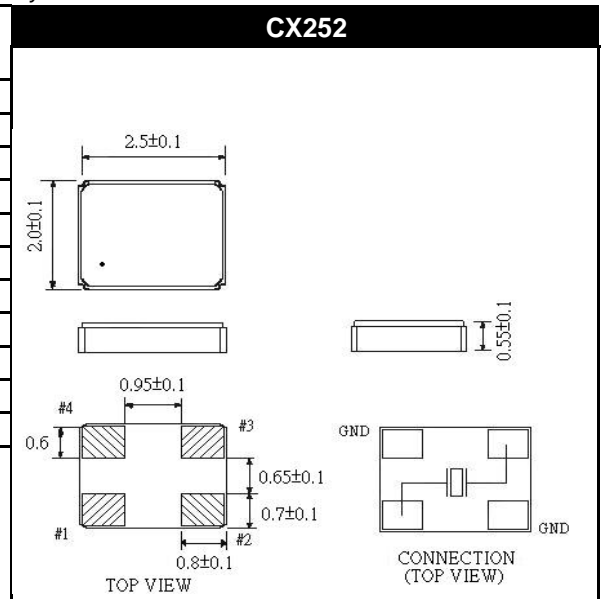

Equivalent Series Resistance Table No. 1

Frequency	Mode	ESR
12.0~15.0 MHz	Fundamental	180 ohms max
16.0~20.0 MHz	Fundamental	150 ohms max
21.0~30.0 MHz	Fundamental	100 ohms max
31.0~80.0 MHz	Fundamental	60 ohms max

