

Datacomm

Dedicated fixed frequency
 LVPECL Output
 Low Jitter
 Industry Standard SMD package


Gigabit Ethernet
 Low cost
 Application Specific Product

Part Number **CUFE-L-A7-BP-106.25 TS**

Specifications:

	Min	Typical	Max	Units
Frequency Range:		106.25		MHz
Stability:	-35		35	ppm
Supply Voltage:	3.135	3.3	3.465	V
Operating Temperature:	-40		85	°C
Storage Temperature:	-55		135	°C
Duty Cycle:	45		55	%
Start-Up Time:			5	mS
Aging:(ppm/1st Year) Ta=25C, Vdd=3.3V			5	ppm
Supply Current:			110	mA
Power Down Current:		200		uA
RMS Period Jitter:				pS
RMS Integrated Jitter: 12KHz to 20MHz		0.55	1	pS
Phase Noise @ 10 KHz :			-100	dBc/Hz
Output Voltage:				
Voh	0.9*Vdd			v
Vol			0.1*Vdd	v
Rise/Fall Time: CL=15pf		0.8	1.5	nS
Output Level:		LVPECL		

Tri-State internal pull-up
 Output active when high.

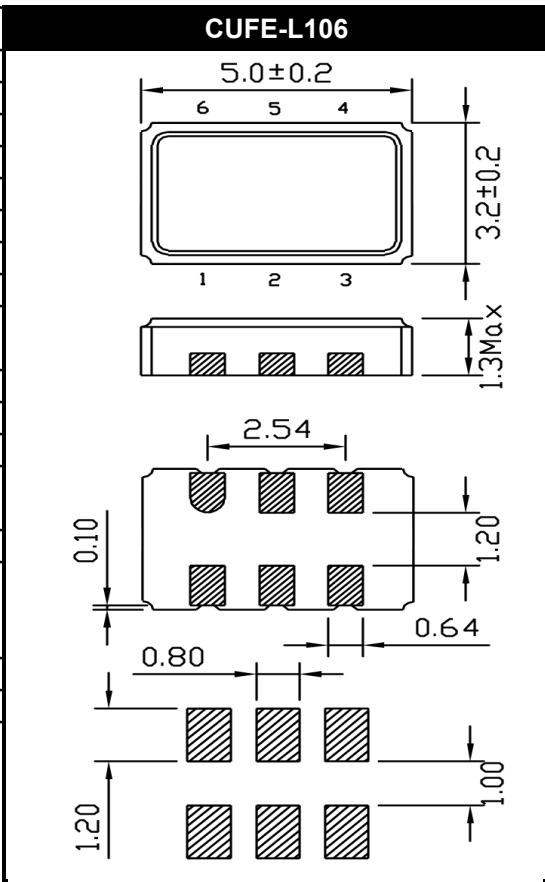

Cardinal Components, Inc.
 145 Rt. 46 West
 Wayne, NJ 07470

TEL: (973)785-1333
 E-MAIL: sales@cardinalxtal.com
 WEB: http://www.cardinalxtal.com