

Surface Mount Aluminum Electrolytic Capacitors NAWP Series

FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- REDUCED CASE SIZE (SMALLER THAN NACEW)
- SUIT FOR HIGH TEMPERATURE REFLOW SOLDERING (UP TO 250°C)
- 1,000 HOUR LOAD LIFE @ +105°C
- DESIGNED FOR AUTOMATIC MOUNTING AND REFLOW SOLDERING

SAC Alloy Compatible
250°C

RoHS
Compliant

includes all homogeneous materials



CHARACTERISTICS

Rated Voltage Rating	6.3 ~ 50Vdc						
Rated Capacitance Range	4.7 ~ 220μF						
Operating Temp. Range	-40 ~ +105°C						
Capacitance Tolerance	±20% (M)						
Max. Leakage Current After 2 Minutes @ 20°C	0.01CV or 3μA whichever is greater						
Tan δ @ 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50
	S.V. (Vdc)	8.0	13	20	32	44	63
	Tan δ	0.35	0.30	0.26	0.20	0.16	0.12
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	4	3	2	2	2	2
	Z-40°C/Z+20°C	10	8	6	4	4	4
Load Life Test @ 105°C All Case Sizes = 1,000 hours	Capacitance Change	Within ±25% of initial measured value (6.3V ±30%)					
	Tan δ	Less than ±300% of the specified maximum value					
	Leakage Current	Less than the specified maximum value					

*See Part Number System for Details

LOW ESR COMPONENT
LIQUID ELECTROLYTE
For Performance Data
see www.LowESR.com

STANDARD VALUES AND CASE SIZES (mm)

Cap. (μF)	Code	Working Voltage (Vdc)					
		6.3	10	16	25	35	50
4.7	4R7	-	-	-	-	-	4X5.5
10	100	-	-	-	4X5.5	4X5.5	5X5.5
22	220	-	4X5.5	4X5.5	5X5.5	5X5.5	6.3X5.5
33	330	4X5.5	4X5.5	5X5.5	5X5.5	6.3X5.5	-
47	470	4X5.5	5X5.5	5X5.5	6.3X5.5	-	-
100	101	5X5.5	5X5.5	-	-	-	-
220	221	6.3X5.5	-	-	-	-	-

PART NUMBER SYSTEM

NAWP 101 M 10V 5x5.5 L B F

Series Capacitance Code in μF, first 2 digits are significant
Third digit is no. of zeros, "R" indicates decimal for values under 10μF


Working Voltage Tolerance Code M=20%

Size in mm Termination/Packaging Code Reflow Temperature Code

RoHS Compliant

CASE DIMENSIONS (mm)

Case Size	φD±0.5	L max.	A±0.2	B±0.2	I±0.3	W	P±0.3
4x5.5	4.0	5.5	4.3	4.3	1.8	0.5~0.8	1.0
5x5.5	5.0	5.5	5.3	5.3	2.1	0.5~0.8	1.4
6.3x5.5	6.3	5.5	6.6	6.6	2.5	0.5~0.8	2.2

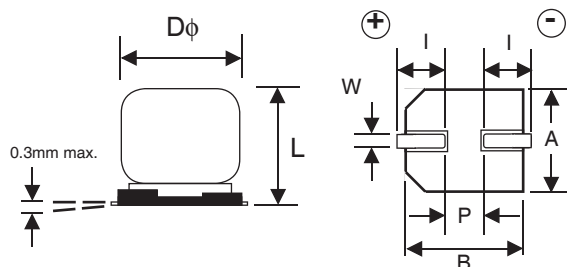

PEAK REFLOW TEMPERATURE CODES

Code	Peak Reflow Temperature
L	250°C

TERMINATION FINISH & PACKAGING OPTIONS CODES

Code	Finish & Reel Size
B	Sn-Bi Finish & 13" Reel
LB	Sn-Bi Finish & 15" Reel (15" available for 4x5.5 case size only)

PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.
Also found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



Surface Mount Aluminum Electrolytic Capacitors NAWP Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS


NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Ripple Current (mA) +105°C/120Hz	Maximum ESR (Ω) +20°C/120Hz	Load Life Hours @ +105°C
NAWP330M6.3V4X5.5LBF	33	6.3	0.35	29	17.59	1,000
NAWP470M6.3V4X5.5LBF	47		0.35	36	12.35	1,000
NAWP101M6.3V5X5.5LBF	100		0.35	47	5.81	1,000
NAWP151M6.3V6.3X5.5LBF	150		0.35	71	3.87	1,000
NAWP221M6.3V6.3X5.5LBF	220		0.35	74	2.64	1,000
NAWP220M10V4X5.5LBF	22	10	0.30	28	22.62	1,000
NAWP330M10V4X5.5LBF	33		0.30	29	15.08	1,000
NAWP470M10V5X5.5LBF	47		0.30	43	10.59	1,000
NAWP101M10V5X5.5LBF	100		0.30	47	4.98	1,000
NAWP151M10V6.3X5.5LBF	150		0.30	71	3.32	1,000
NAWP220M16V4X5.5LBF	22	16	0.26	28	19.60	1,000
NAWP330M16V5X5.5LBF	33		0.26	35	13.07	1,000
NAWP470M16V5X5.5LBF	47		0.26	39	9.18	1,000
NAWP100M25V4.X5.5LBF	10	25	0.20	22	33.17	1,000
NAWP220M25V5X5.5LBF	22		0.20	35	15.08	1,000
NAWP330M25V5X5.5LBF	33		0.20	45	10.05	1,000
NAWP470M25V6.3X5.5LBF	47		0.20	70	7.06	1,000
NAWP100M35V4X5.5LBF	10	35	0.16	22	26.54	1,000
NAWP220M35V5X5.5LBF	22		0.16	35	12.06	1,000
NAWP330M35V6.3X5.5LBF	33		0.16	43	8.04	1,000
NAWP470M50V4X5.5LBF	4.7	50	0.12	16	42.35	1,000
NAWP100M50V5X5.5LBF	10		0.12	23	19.90	1,000
NAWP220M50V6.3X5.5LBF	22		0.12	35	9.05	1,000

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Frequency Hz	100 < f < 1K	1K < f < 10K	10K < f < 100K	100K < f
C < 4.7μF	1.00	1.30	1.50	1.80
4.7μF < C < 33μF	1.00	1.20	1.30	1.45
33μF < C	1.00	1.10	1.20	1.30

REFLOW SOLDERING CONDITIONS


Diameter	Time above 200°C (t)	Time above 217°C (t1)	Time above 230°C (t2)	Peak Temperature 5 seconds
4 ~ 6.3mm φ	70 sec. max.	60 sec. max.	40 sec. max.	250°C

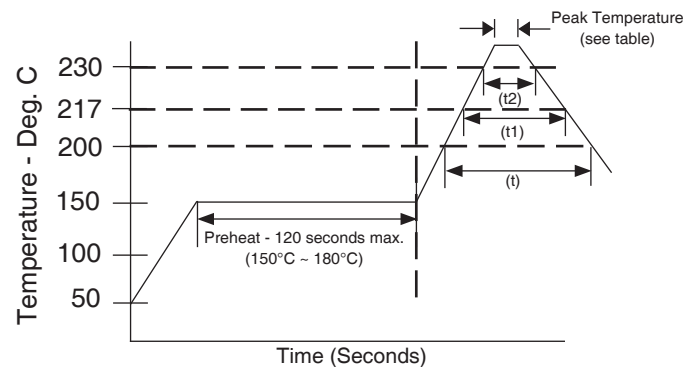

Surface Mount Aluminum Electrolytic Capacitors NAWP Series


RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
4x5.5	1.0	2.6	1.8
5x5.5	1.4	3.0	1.8
6.3x5.5	2.1	3.5	1.8



CARRIER TAPE DIMENSIONS & REEL QTY

Case Size	A ±0.3	B ±0.3	C ±0.3	D ±0.1	P ±0.1	T ±0.2	t ±0.1
4x5.5	4.7	4.7	12.0	5.5	8.0	5.8	0.4
5x5.5	5.7	5.7	12.0	5.5	12.0	5.8	0.4
6.3x5.5	7.0	7.0	16.0	7.5	12.0	5.8	0.4

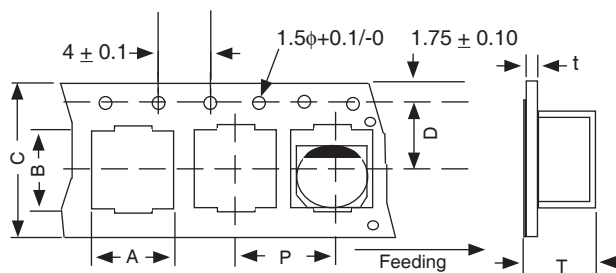

REEL DIMENSIONS & REEL QTY

Case Size	W ±1.0	Quantity
		TR13 (330mm)
4x5.5	14	1500
5x5.5	14	1000
6.3x5.5	18	1000

REEL DIMENSIONS & REEL QTY

Case Size	W ±1.0	Quantity
		TR15 (380mm)
4x5.5	14	2000

