

FEATURES

- RECTANGULAR PACKAGE WITH METAL STRIP FUSE ELEMENT
- EIA SIZES 0402, 0603, 0805 AND 1206
- CURRENT RATINGS FROM 0.2 ~ 5.0 AMPS
- SAFETY STANDARD APPROVAL (UL and c-UL File Number E302168)
- Pb-FREE COMPATIBLE WITH FLOW AND REFLOW SOLDERING

**RoHS
Compliant**



includes all homogeneous materials

*See Part Number System for Details



SPECIFICATIONS

Type	Case Size	Rated Current (Amps)	Rated Voltage (Vdc)	Temperature Range	Case Dimensions				
					L	W	H	P ₁	P ₂
NFCC04	0402	0.2 ~ 1.25	24	-55°C ~ +125°C	1.0 ± 0.05	0.5 ± 0.05	0.4 ± 0.10	0.2 ± 0.10	0.25 ± 0.10
NFHC04		1.6 ~ 3.15							
NFCC06	0603	0.15 ~ 2.5	32		1.6 ± 0.01	0.8 +0.15/-0.05	0.45 ± 0.10	0.3 ± 0.15	0.3 ± 0.10
NFHC06		3.15 ~ 4.0							
NFCC08	0805	0.4 ~ 2.5	50		2.0 ± 0.10	1.25 ± 0.10	0.6 ± 0.10	0.4 ± 0.20	0.4 ± 0.20
NFHC08		3.15 ~ 5.0							
NFCC12	1206	0.2 ~ 2.5	50		3.2 ± 0.20	1.6 ± 0.15	0.6 ± 0.10	0.5 ± 0.25	0.5 ± 0.25
NFHC12		3.15 ~ 5.0					32		

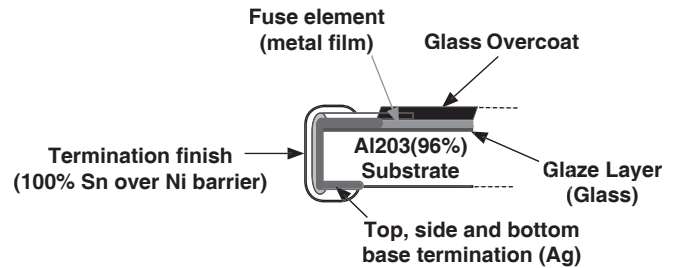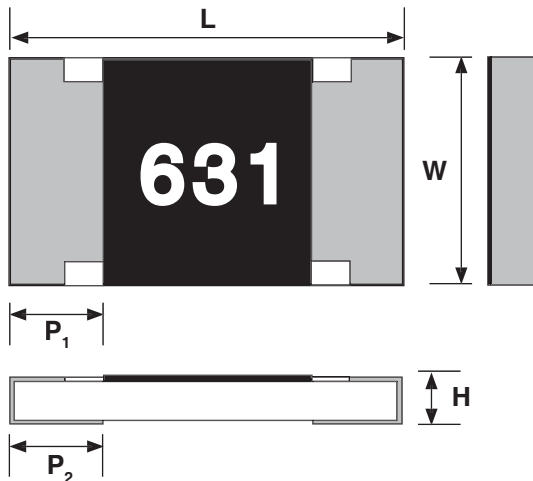

PART NUMBERING SYSTEM

NFCC 08 202 AD TP F

- NFCC**: Series
- 08**: Case Size Code: See specifications table
- 202**: Current Rating Code: See ratings table
- AD**: Clearing Time Code:
 - AD = Within 5 sec. under 250% of rated current
 - AB = Within 5 sec. under 200% of rated current
- TP**: Tape & Reel: PA = Paper (2mm pitch), TP = Paper (4mm pitch)
- F**: RoHS Compliant


AVAILABLE VALUES AND RATINGS

Part Number	Case Size	Current Rating @ +70°C	Marking Symbol	Internal (Cold) Resistance (mΩ) max.	Melting I ² T (t=1ms) (A ² xs) typical	Voltage Drop (R/C x 100) mV typical	Rated Voltage (DC)	Breaking Capacity (Amps)	Time/Current Characteristics	
									Current	Pre-arc time
NFCC04 201ADPAF	0402	0.2	Z	1000	0.0005929	199	24	35	250%	5 sec. max.
NFCC04 251ADPAF		0.25	C	750	0.0008464	172				
NFCC04 321ADPAF		0.315	D	620	0.00169	153				
NFCC04 401ADPAF		0.4	E	340	0.0023104	139				
NFCC04 501ADPAF		0.5	F	290	0.004305625	125				
NFCC04 631ADPAF		0.63	I	210	0.00625	121				
NFCC04 801ADPAF		0.8	K	150	0.0119025	121				
NFCC04 102ADPAF		1.0	L	120	0.0207025	114				
NFCC04 132ADPAF		1.25	M	90	0.03364	110				
NFHC04 162ADPAF		1.6	N	55	0.0442225	86				
NFHC04 202ADPAF		2.0	S	40	0.07744	86				
NFHC04 252ADPAF		2.5	T	36	0.15625	36				
NFHC04 322ADPAF		3.15	U	26	0.37636	26				
NFCC06 151ADTPF	0603	0.15	0D	4000	0.00036	521	32	35	250%	5 sec. max.
NFCC06 201ADTPF		0.2	ZD	1800	0.00081	347				
NFCC06 251ADTPF		0.250	CD	1000	0.0011025	209				
NFCC06 321ADTPF		0.315	DD	750	0.00169	208				
NFCC06 401ADTPF		0.4	ED	330	0.0023104	126				
NFCC06 501ADTPF		0.5	FD	280	0.0036864	124				
NFCC06 631ADTPF		0.63	ID	200	0.00676	126				
NFCC06 801ADTPF		0.8	KD	130	0.0105625	97				
NFCC06 102ADTPF		1.0	LD	110	0.016	107				
NFCC06 132ADTPF		1.25	MD	85	0.03249	98				
NFCC06 162ADTPF		1.6	ND	70	0.064	107				
NFCC06 202ADTPF		2.0	SD	55	0.13689	106				
NFCC06 252ADTPF		2.5	TD	45	0.23716	109				
NFHC06 322ADTPF		3.15	UD	26	0.4	88				
NFHC06 402ADTPF		4.0	XD	19	0.784	90	24	35	250%	5 sec. max.
NFCC08 401ADTPF	0805	0.4	401	330	0.0024025	123	50	50	250%	5 sec. max.
NFCC08 501ADTPF		0.5	501	270	0.0033489	120				
NFCC08 631ADTPF		0.63	631	190	0.0044944	114				
NFCC08 801ADTPF		0.8	801	130	0.0093025	96				
NFCC08 102ADTPF		1.0	102	100	0.01444	102				
NFCC08 132ADTPF		1.25	132	80	0.02704	99				
NFCC08 162ADTPF		1.6	162	65	0.0442225	102				
NFCC08 202ADTPF		2.0	202	55	0.09025	115				
NFCC08 252ADTPF		2.5	252	40	0.13456	110				
NFHC08 322ADTPF		3.15	UD	26	0.46225	85				
NFHC08 402ADTPF		4.0	XD	19	0.841	82	32	50	250%	5 sec. max.
NFHC08 502ADTPF		5.0	YD	14	1.48225	70	24			
NFCC12 201ADTPF	1206	0.2	201	1800	0.000570025	341	50	50	250%	5 sec. max.
NFCC12 251ADTPF		0.25	251	1000	0.0009216	227				
NFCC12 321ADTPF		0.315	321	750	0.0015129	213				
NFCC12 401ADTPF		0.4	401	350	0.0024025	141				
NFCC12 501ADTPF		0.5	501	295	0.0033124	115				
NFCC12 631ADTPF		0.63	631	200	0.0058564	127				
NFCC12 801ADTPF		0.8	801	140	0.0087025	114				
NFCC12 102ADTPF		1.0	102	110	0.0156025	103				
NFCC12 132ADTPF		1.25	132	85	0.02916	104				
NFCC12 152ADTPF		1.5	152	78	0.04624	101				
NFCC12 162ADTPF		1.6	162	75	0.0664225	110				
NFCC12 202ADTPF		2.0	202	65	0.1	109				
NFCC12 252ADTPF		2.5	252	45	0.18769	111				
NFHC12 322ADTPF		3.15	UD	26	0.4	90				
NFHC12 402ADTPF		4.0	XD	19	0.784	84	32	50	250%	5 sec. max.
NFHC12 502ADTPF		5.0	YD	14	1.40625	83				

AVAILABLE VALUES AND RATINGS

Part Number	Case Size	Current Rating @ +70°C	Marking Symbol	Internal (Cold) Resistance (mΩ) max.	Melting I ² T (t=1ms) (A ² xs) typical	Voltage Drop (R/C x 100) mV typical	Rated Voltage (DC)	Breaking Capacity (Amps)	Time/Current Characteristics	
									Curent	Pre-arc time
NFCC04 251ABPAF	0402	0.25	C	1000	0.0005929	265	24	35	200%	5 sec. max.
NFCC04 321ABPAF		0.315	D	750	0.00081	229				
NFCC04 401ABPAF		0.4	E	620	0.0016384	210				
NFCC04 501ABPAF		0.5	F	340	0.00225	188				
NFCC04 631ABPAF		0.63	I	290	0.00441	170				
NFCC04 751ABPAF		0.75	A	220	0.0055225	179				
NFCC04 801ABPAF		0.8	K	210	0.00625	168				
NFCC04 102ABPAF		1.0	L	150	0.0126025	164				
NFCC04 132ABPAF		1.25	M	120	0.0207025	156				
NFCC04 152ABPAF		1.5	H	100	0.02809	166				
NFCC04 162ABPAF		1.6	N	90	0.036	156				
NFHC04 202ABPAF		2.0	S	55	0.04624	121				
NFHC04 252ABPAF		2.5	T	40	0.07744	119				
NFCC06 251ABTPF	0603	0.25	CB	1800	0.0006084	474	32	35	200%	5 sec. max.
NFCC06 321ABTPF		0.315	DB	1000	0.0010404	281				
NFCC06 401ABTPF		0.4	EB	750	0.0017424	289				
NFCC06 501ABTPF		0.5	FB	330	0.0024964	167				
NFCC06 631ABTPF		0.63	IB	280	0.0036864	166				
NFCC06 751ABTPF		0.75	AB	210	0.0054289	165				
NFCC06 801ABTPF		0.8	KB	200	0.00625	175				
NFCC06 102ABTPF		1.0	LB	130	0.0099225	133				
NFCC06 132ABTPF		1.25	MB	110	0.0164025	144				
NFCC06 152ABTPF		1.5	HB	95	0.02704	135				
NFCC06 162ABTPF		1.6	NB	85	0.0330625	136				
NFCC06 202ABTPF		2.0	SB	70	0.05929	146				
NFCH06 252ABTPF		2.5	TB	40	0.14884	115				
NFCC08 501ABTPF	0805	0.5	FB	330	0.0024025	162	50	50	200%	5 sec. max.
NFCC08 631ABTPF		0.63	IB	270	0.0033124	164				
NFCC08 801ABTPF		0.8	KB	190	0.0047089	160				
NFCC08 102ABTPF		1.0	LB	130	0.0081225	129				
NFCC08 132ABTPF		1.25	MB	100	0.0133225	138				
NFCC08 162ABTPF		1.6	NB	80	0.02704	139				
NFCC08 202ABTPF		2.0	SB	65	0.05041	139				
NFHC08 252ABTPF		2.5	TB	40	0.11664	118	32	50	200%	5 sec. max.

Current vs. Temperature Derating Guide

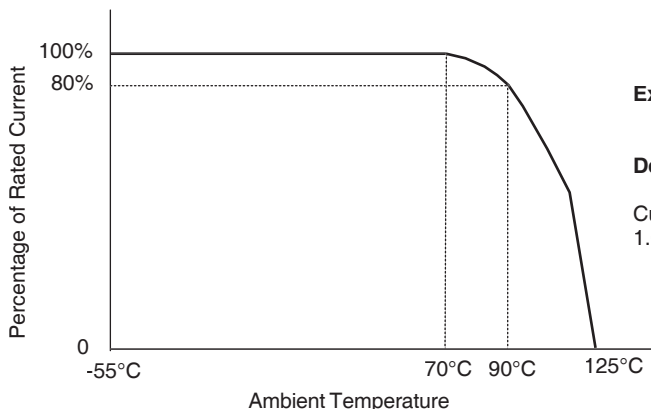

Nominal Derating

Option Code AD: ≤ 80% of Rated Current
Option Code AB: ≤ 70% of Rated Current

Example: P/N NFCC0603102AB

Rated Current: 1.0A @ 70°C


Derating at 90°C:

Current Rating x Normal Derating x Temperature Derating = 0.7A

1.0A (Rated Current) x 0.70 (Type AB) x 0.80 (Temperature Derating) = 0.56A


Item		Specification	Test Method
Surface Temperature Rise		75°C	Ambient Temperature: 10°C ~ 30°C Applied Current: Rated Current
Current Capability		No fusing	Rated Current x 110% @ 70°C ± 2°C for 1 hr
Working Temperature Range		-55°C ~ +125°C	-
Time/Current Characteristic		See Available Values and Ratings Tables	
Option Code	AD	Rated Current x 250% Pre-acting time 5 sec. max.	Test current shall be applied continuously to the fuse mounted on the test substrate
	AB	Rated Current x 200% Pre-acting time 5 sec. max.	
Bending Strenght		No Visible Damage Internal Resistance Change ±3% (AD, AB)	JIS C0051:1994 7.4.1 On the test substrate bending value is 3mm for 10 ± 1 sec.
Solderability		At least 95% coverage of the terminal surface	JIS C0054:1994 Immersion into solder at 235C ±5°C for 2 ± 0.5 secs. Immersion into solder at 260°C for 10 sec.
Resistance to Soldering Heat		No Visible Damage Internal resistance range ±10% max.	Re ow Soldering 1. Pre-heating: 150°C ±5°C, 120 sec. max. 2. T max. 240°C ±5°C, 10 sec. max, 2 passes
Endurance (Load Life)		Within 10% of voltage drop	At normal ambient temperature & RH on the test substrate Rated Current x 1.05, 1 hour "ON", 1/4 hour "OFF", 100 cycles Rated current x 1.25 for 1 hour

RECOMMENDED REFLOW PROFILE

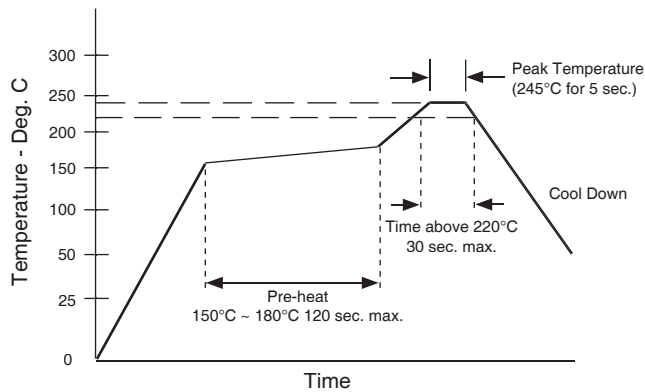


RECOMMENDED FLOW PROFILE

Note: 0402 Re ow Only

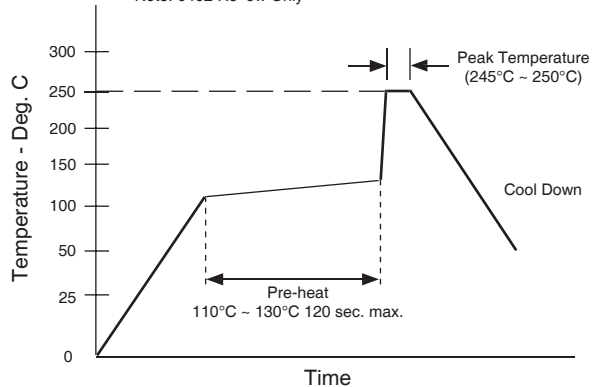


Recommended Land Pattern Dimensions (mm)

Case Size	Re ow Soldering				Flow Soldering			
	A	B	C	D	A	B	C	D
0402	0.5	1.3	0.5	0.4	N/A			
0603	1.0	2.0	0.8	0.5	1.0	2.6	0.8	0.8
0805	1.3	2.7	1.25	0.7	1.3	3.1	1.25	0.9
1206	2.2	3.9	1.6	0.85	2.2	4.3	1.6	1.05

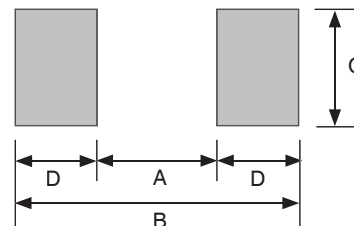


FUSING TIME CURRENT CHARACTERISTICS

NFCC/NFHC04AB

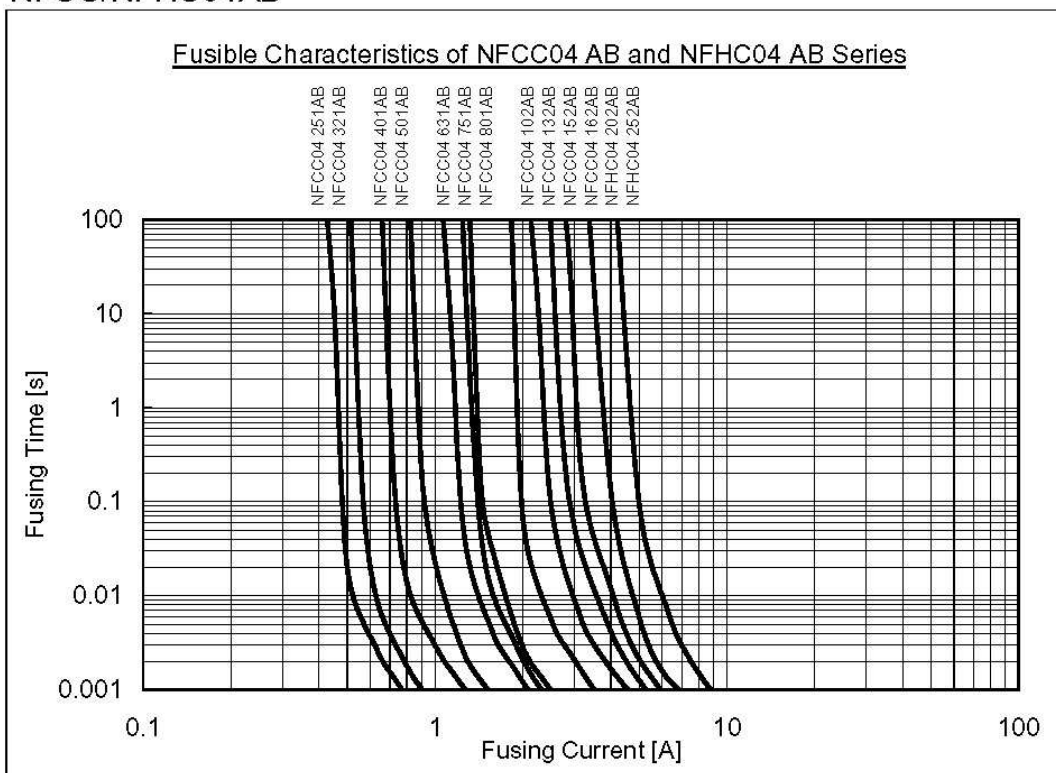


NFCC/NFHC04AD

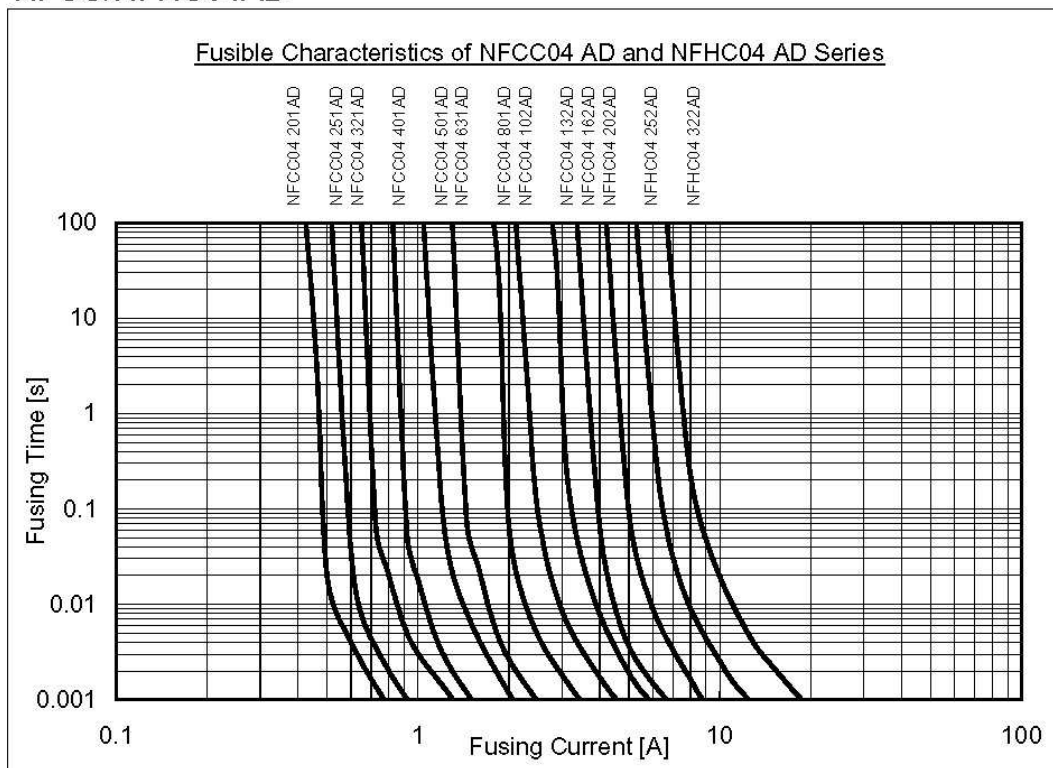


FUSING TIME CURRENT CHARACTERISTICS

NFCC/NFHC06AB

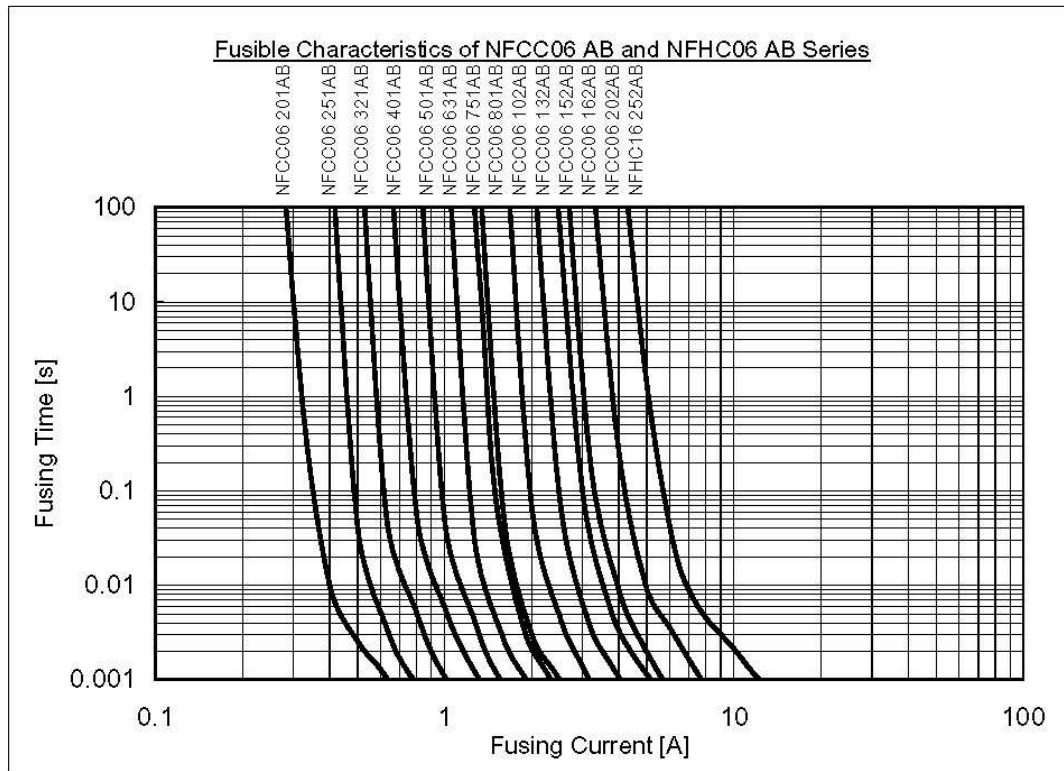


NFCC/NFHC08AB

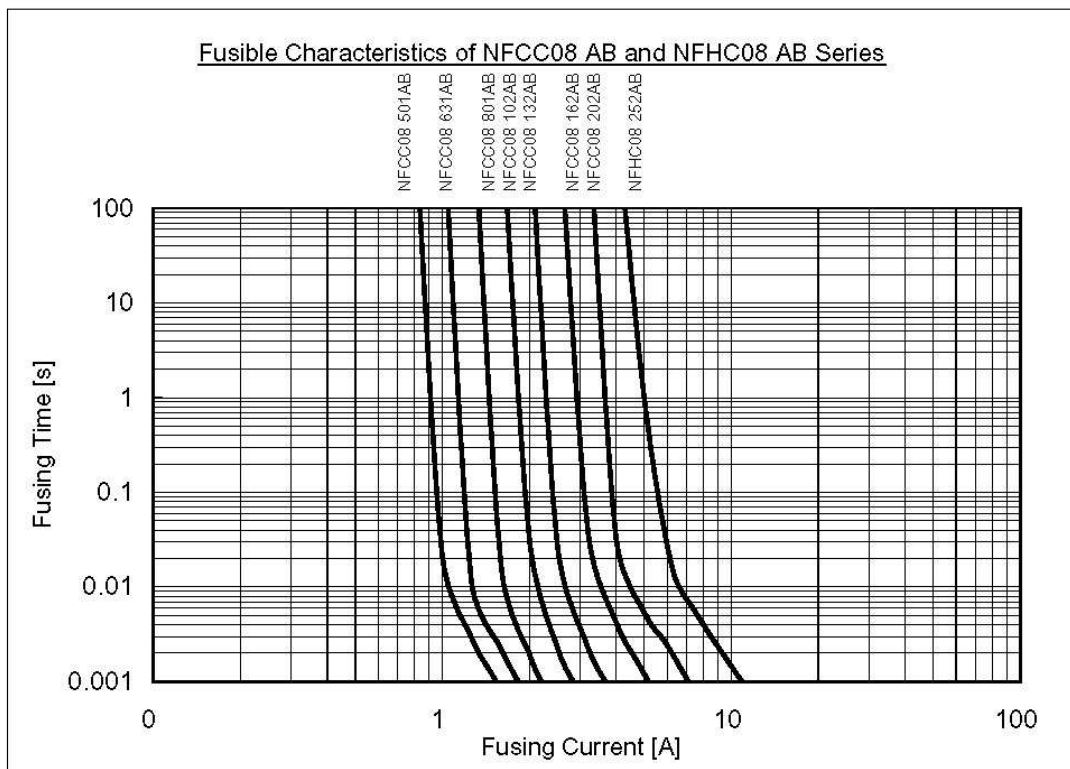


FUSING TIME CURRENT CHARACTERISTICS

NFCC/NFHC08AB

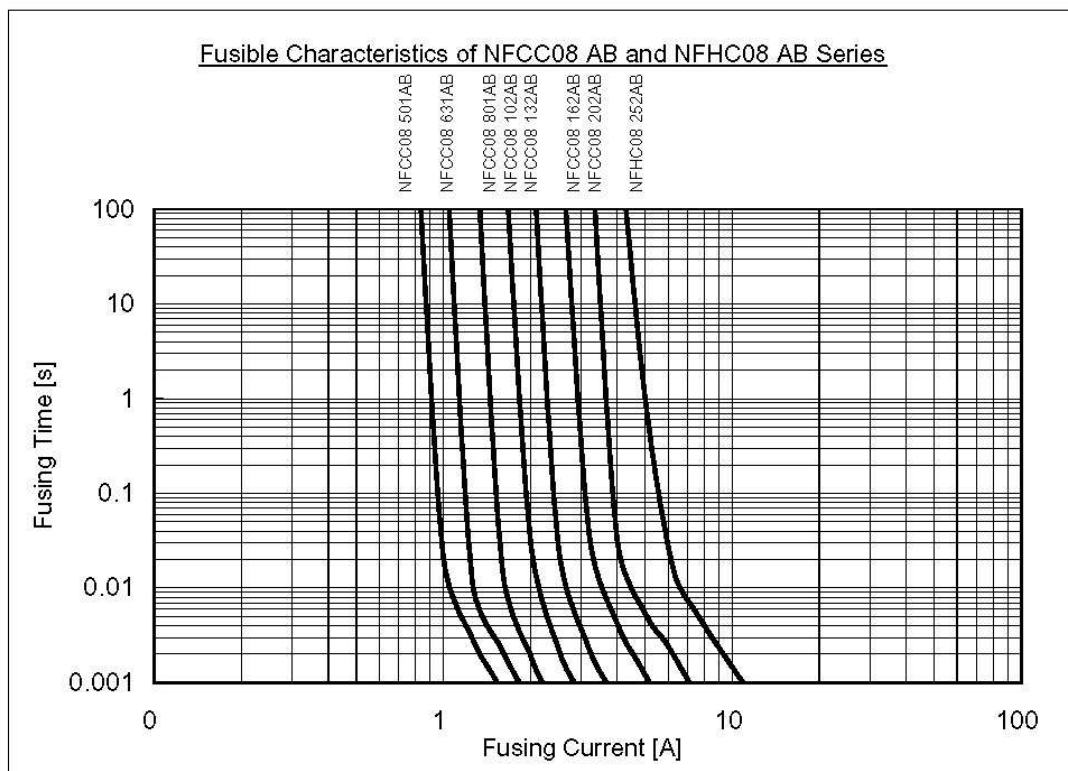


NFCC/NFHC08AD

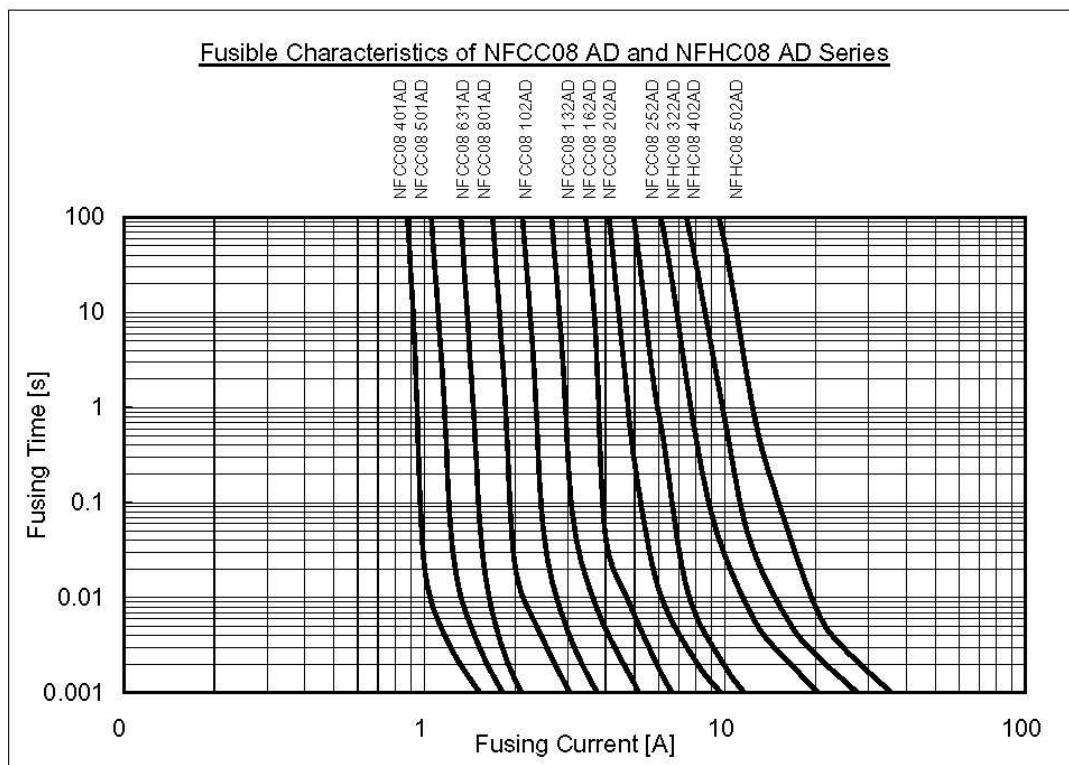


FUSING TIME CURRENT CHARACTERISTICS

NFCC/NFHC12AD

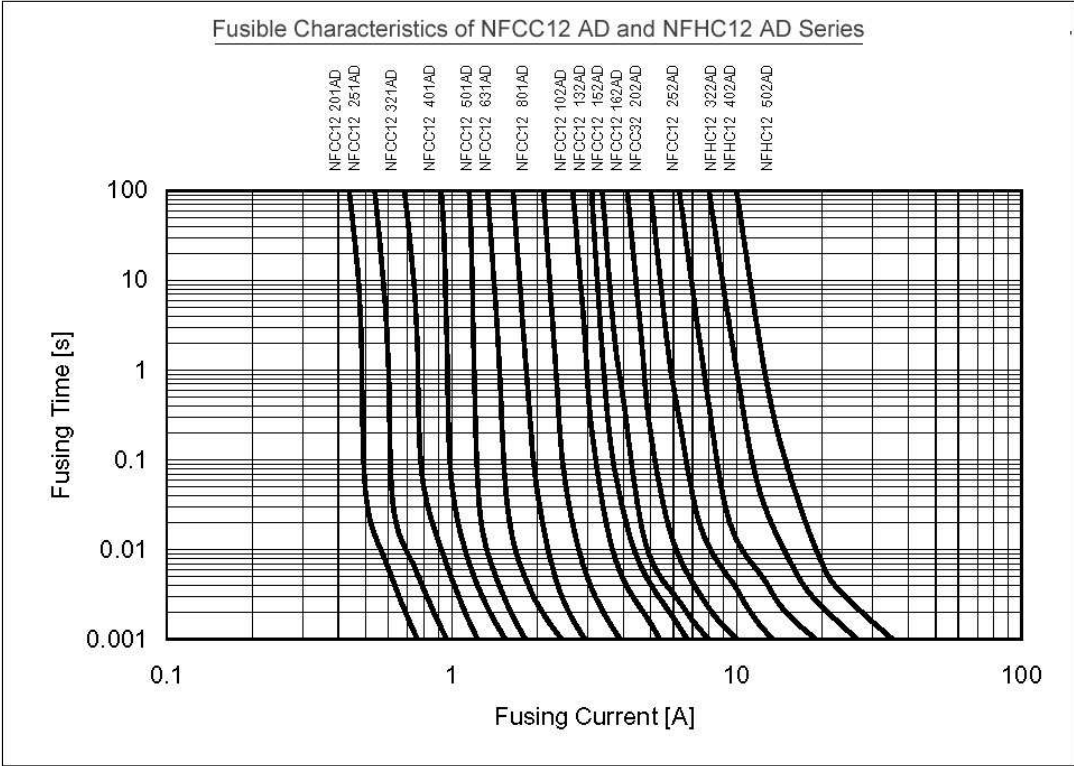


CARRIER TAPE DIMENSIONS (mm)

Type	A	B	W	F	E	P ₁	P ₀	φD	T ₁	T ₂	Qty/Reel
NFCC04/NFHC04	0.65 ±0.10	1.15 ±0.10	8.00 ±0.20	3.50 ±0.05	1.75 ±0.10	2.00 ±0.05	4.00 ±0.05	1.55 ±0.05	0.60 ±0.05	0.70 max.	10,000

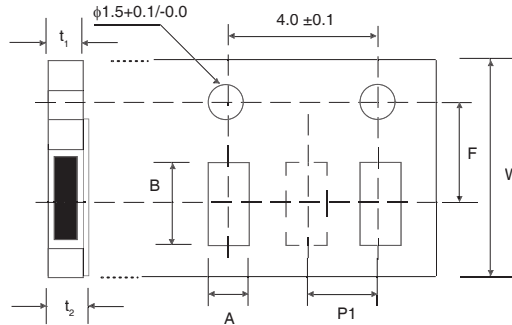

CARRIER TAPE DIMENSIONS (mm)

Type	A	B	W	F	E	P ₁	P ₀	ϕD	T ₁	T ₂	Qty/Reel
NFCC06/NFHC06	1.15 ±0.15	1.90 ±0.20	8.00 ±0.20	3.50 ±0.05	1.75 ±0.10	4.00 ±0.05	4.00 ±0.05	1.55 ±0.05	0.7 max.	0.8 max.	5,000
NFCC08/NFHC08	1.65 ±0.15	2.50 ±0.20							0.9 max.	1.0 max.	
NFCC12/NFHC12	2.00 ±0.15	3.6 ±0.20									

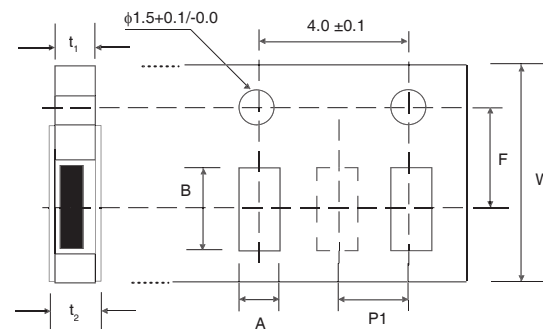

REEL DIMENSIONS (mm) AND QUANTITY

Type	A +0/-3	B +1/-0	C ±0.20	W ±0.3	Qty
NFCC04/NFHC04	180	60	13	9.0	10,000
NFCC06/NFHC06					5,000
NFCC08/NFHC08					
NFCC12/NFHC12					

