

VRLA Rechargeable Battery

HR40-12 (HR40-12FR)

Handle Type



FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).
- The battery is designed for high rate usage.
- Absorbent Glass Mat technology for efficient gas recombination.
- The power density at 5 min~15min discharging rate is 30% higher than BP series.

APPLICATION

- UPS
- Wheelchairs
- Lawn Mowers
- Electronic Medical Equipment
- Golf-Carts



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	38Ah @ 10 hour rate F.V.(1.75V/cell)
Approx. Weight	12.1Kg(26.68lbs.)
Terminals	B7 (Fitting M6 bolt & nut) I2 is optional
Internal Resistance	≤6mΩ (Fully Charged)
Max. Discharge Current	495 A (5 sec.)
Max. Charge Current	11.4 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)

ISO 9001	ngs ISO 9001 REGISTERED	UKAS REGISTERED
ISO14001	WSC ISO14001	
UL	UL MH19884	
CE	CE C4M20310-2474-E-16	
<ul style="list-style-type: none"> ● IEC 61056-1 ● JIS C 8702-1 ● GB/T 19639.1 		

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

210±1.5 (8.27±0.06)

Width

129±1.5 (5.08±0.06)


Container Height

168±1.5 (6.61±0.06)

Total Height


B7:179±2.0 (7.05±0.08)

I2:168±2.0 (6.61±0.08)

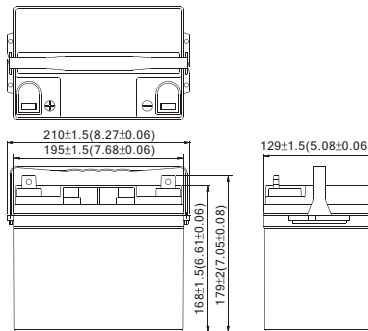

Terminal B7

Terminal I2

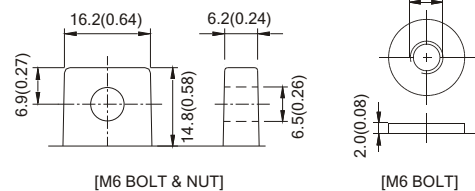

Terminal Hardware Initial Torque: B7/I2(5.5Nm±5%)

Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	1640.0	1120.0	811.0	692.0	526.0	400.0	334.0	294.0	162.2
1.70V	1960.0	1250.0	882.0	733.0	548.0	415.0	345.0	301.0	165.3
1.60V	2100.0	1315.0	922.0	760.0	560.0	425.0	352.0	306.0	168.0
1.50V	2160.0	1340.0	942.0	772.0	567.0	430.0	356.0	309.0	168.9
1.40V	2200.0	1358.0	953.0	779.0	571.0	433.0	359.0	311.0	169.3
1.30V	2220.0	1370.0	960.0	784.0	574.0	435.0	361.0	312.0	169.8

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	20 Min	30 Min	40 Min	50 Min	60 Min	120 Min
1.80V	146.43	98.25	70.16	59.35	44.58	33.64	27.95	24.50	13.52
1.70V	178.18	109.65	76.30	62.86	46.44	34.90	28.87	25.08	13.78
1.60V	190.91	115.35	79.76	65.18	47.46	35.74	29.46	25.50	14.00
1.50V	196.36	117.54	81.49	66.21	48.05	36.16	29.79	25.75	14.08
1.40V	200.00	119.12	82.44	66.81	48.39	36.42	30.04	25.92	14.11
1.30V	201.82	120.18	83.04	67.24	48.64	36.59	30.21	26.00	14.15

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.