




P-channel Enhancement-mode Power MOSFET

- Simple Drive Requirement**
- Low On-resistance**
- Fast Switching Performance**
- RoHS-compliant, Halogen-free**




| | |
|--------------|-------|
| BV_{DSS} | -30V |
| $R_{DS(ON)}$ | 20mΩ |
| I_D | -9.2A |

Description

Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, low on-resistance and cost-effectiveness.

The AP4835GM-HF-3 is in the SO-8 package, which is widely used for commercial and industrial surface-mount applications, and is well suited for low voltage applications such as DC/DC converters.



Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|--|---------------------------------------|------------|-------|
| V_{DS} | Drain-Source Voltage | -30 | V |
| V_{GS} | Gate-Source Voltage | ±25 | V |
| I_D at $T_A=25\text{ }^\circ\text{C}$ | Continuous Drain Current ³ | -9.2 | A |
| I_D at $T_A= 70\text{ }^\circ\text{C}$ | Continuous Drain Current ³ | -7.4 | A |
| I_{DM} | Pulsed Drain Current ¹ | -50 | A |
| P_D at $T_A=25\text{ }^\circ\text{C}$ | Total Power Dissipation | 2.5 | W |
| | Linear Derating Factor | 0.02 | W/°C |
| T_{STG} | Storage Temperature Range | -55 to 150 | °C |
| T_J | Operating Junction Temperature Range | -55 to 150 | °C |

Thermal Data

| Symbol | Parameter | Value | Unit |
|--------|--|-------|------|
| Rthj-a | Maximum Thermal Resistance, Junction-ambient | 50 | °C/W |

Ordering Information

AP4835GM-HF-3TR RoHS-compliant halogen-free SO-8, shipped on tape and reel (3000 pcs/reel)



Electrical Specifications at $T_j=25^\circ\text{C}$ (unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|--------------|---|--------------------------------|------|------|-----------|------------|
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{GS}=0V, I_D=-250\mu A$ | -30 | - | - | V |
| $R_{DS(ON)}$ | Static Drain-Source On-Resistance ² | $V_{GS}=-10V, I_D=-9A$ | - | - | 20 | m Ω |
| | | $V_{GS}=-4.5V, I_D=-6A$ | - | - | 35 | m Ω |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS}=V_{GS}, I_D=-250\mu A$ | -1 | - | -3 | V |
| g_{fs} | Forward Transconductance | $V_{DS}=-10V, I_D=-7A$ | - | 16 | - | S |
| I_{DSS} | Drain-Source Leakage Current | $V_{DS}=-30V, V_{GS}=0V$ | - | - | -1 | μA |
| | Drain-Source Leakage Current ($T_j=70^\circ\text{C}$) | $V_{DS}=-24V, V_{GS}=0V$ | - | - | -25 | μA |
| I_{GSS} | Gate-Source Leakage | $V_{GS}=\pm 25V$ | - | - | ± 100 | nA |
| Q_g | Total Gate Charge ² | $I_D=-7A$ | - | 15 | 24 | nC |
| Q_{gs} | Gate-Source Charge | $V_{DS}=-15V$ | - | 2.8 | - | nC |
| Q_{gd} | Gate-Drain ("Miller") Charge | $V_{GS}=-4.5V$ | - | 8 | - | nC |
| $t_{d(on)}$ | Turn-on Delay Time ² | $V_{DS}=-15V$ | - | 8 | - | ns |
| t_r | Rise Time | $I_D=-1A$ | - | 6.6 | - | ns |
| $t_{d(off)}$ | Turn-off Delay Time | $R_G=3.3\Omega, V_{GS}=-10V$ | - | 44 | - | ns |
| t_f | Fall Time | $R_D=15\Omega$ | - | 34 | - | ns |
| C_{iss} | Input Capacitance | $V_{GS}=0V$ | - | 1175 | 1870 | pF |
| C_{oss} | Output Capacitance | $V_{DS}=-25V$ | - | 195 | - | pF |
| C_{riss} | Reverse Transfer Capacitance | $f=1.0\text{MHz}$ | - | 190 | - | pF |

Source-Drain Diode

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|----------|------------------------------------|------------------------|------|------|------|-------|
| V_{SD} | Forward On Voltage ² | $I_S=-2.1A, V_{GS}=0V$ | - | - | -1.2 | V |
| t_{rr} | Reverse Recovery Time ² | $I_S=-7A, V_{GS}=0V,$ | - | 28 | - | ns |
| Q_{rr} | Reverse Recovery Charge | $di/dt=100A/\mu s$ | - | 18 | - | nC |

Notes:

1. Pulse width limited by maximum junction temperature.
2. Pulse test - pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
3. Surface mounted on 1 in² copper pad of FR4 board; 125°C/W on minimum copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.



Typical Electrical Characteristics

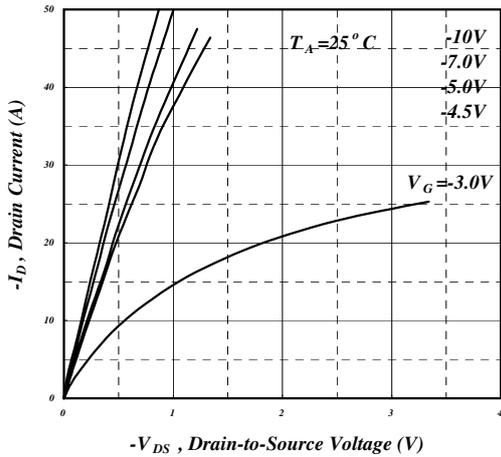


Fig 1. Typical Output Characteristics

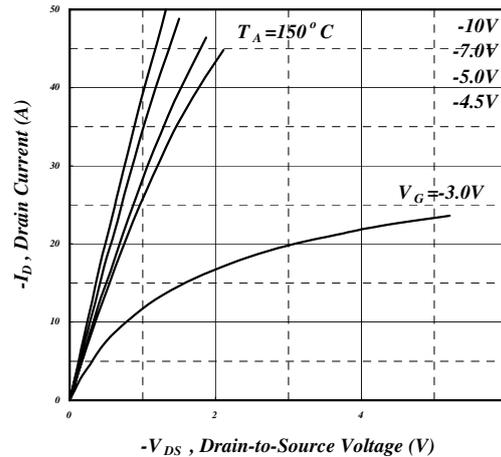


Fig 2. Typical Output Characteristics

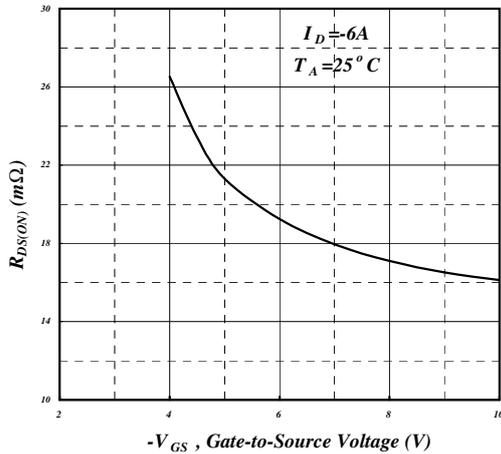


Fig 3. On-Resistance vs. Gate Voltage

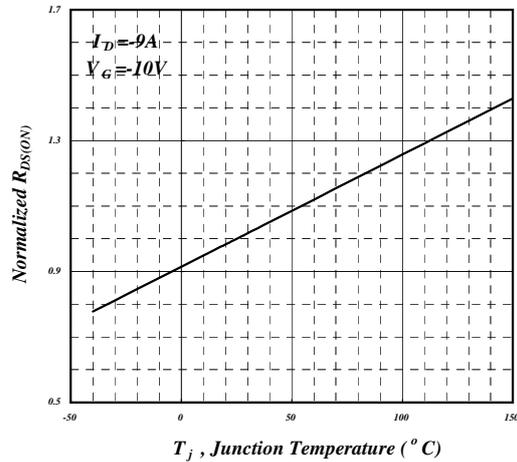


Fig 4. Normalized On-Resistance vs. Junction Temperature

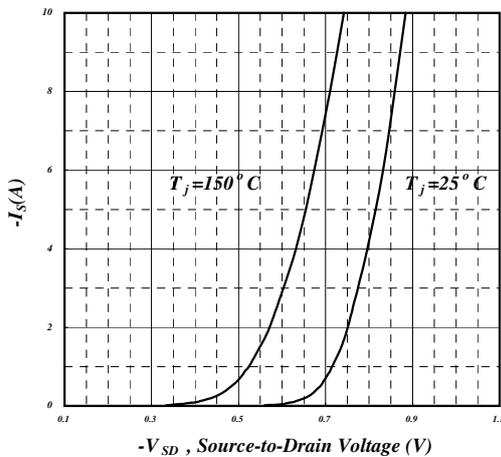


Fig 5. Forward Characteristic of Reverse Diode

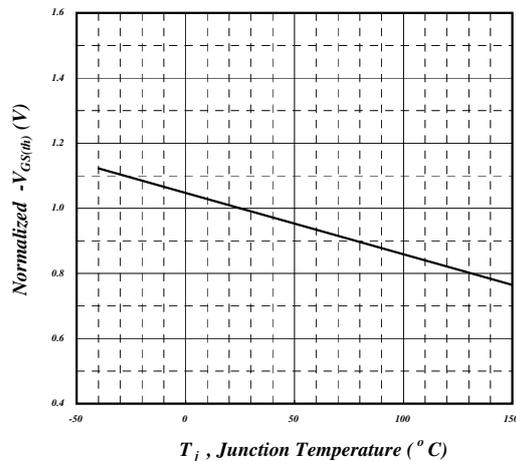


Fig 6. Gate Threshold Voltage vs. Junction Temperature



Typical Electrical Characteristics (cont.)

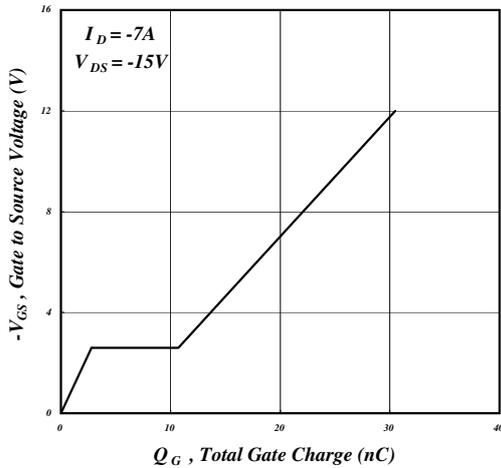


Fig 7. Gate Charge Characteristics

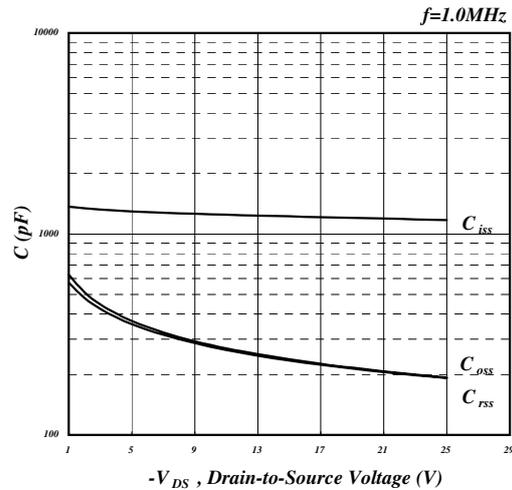


Fig 8. Typical Capacitance Characteristics

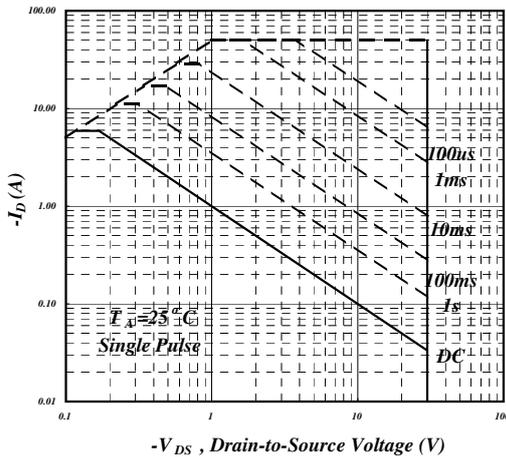


Fig 9. Maximum Safe Operating Area

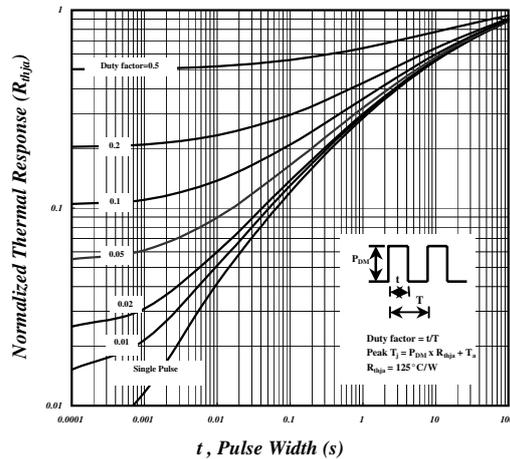


Fig 10. Effective Transient Thermal Impedance

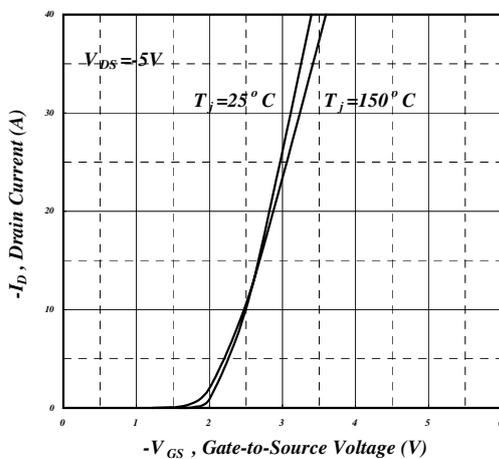


Fig 11. Transfer Characteristics


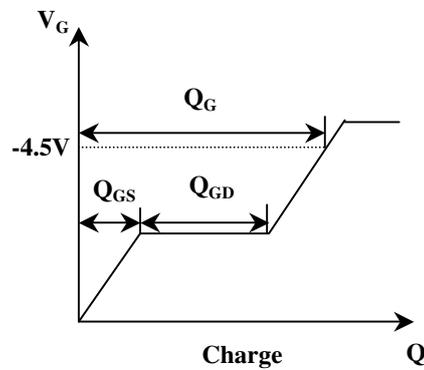





Fig 12. Gate Charge Circuit



Package Dimensions: SO-8

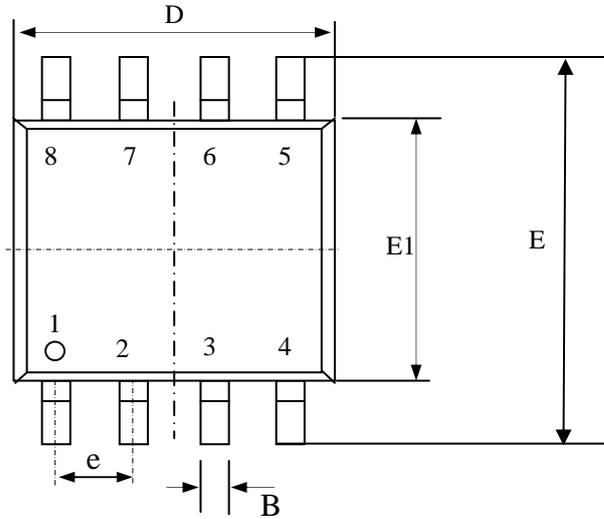


| SYMBOLS | Millimeters | | |
|----------|-------------|------|------|
| | MIN | NOM | MAX |
| A | 1.35 | 1.55 | 1.75 |
| A1 | 0.10 | 0.18 | 0.25 |
| B | 0.33 | 0.41 | 0.51 |
| C | 0.19 | 0.22 | 0.25 |
| D | 4.80 | 4.90 | 5.00 |
| E1 | 3.80 | 3.90 | 4.00 |
| E | 5.80 | 6.15 | 6.50 |
| L | 0.38 | 0.71 | 1.27 |
| θ | 0 | 4.00 | 8.00 |
| e | 1.27 TYP | | |

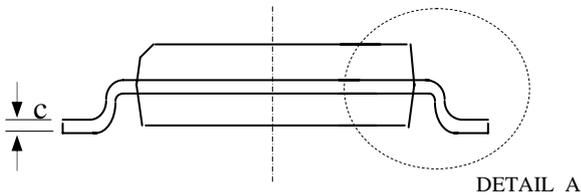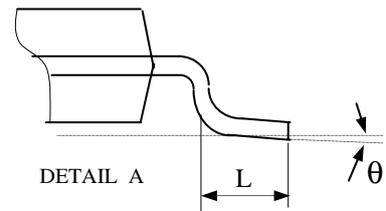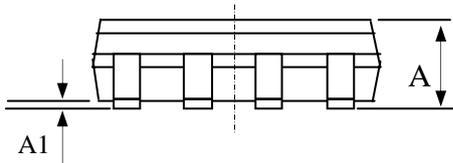

1. All dimensions are in millimeters.
2. Dimensions do not include mold protrusions.

Marking Information: SO-8

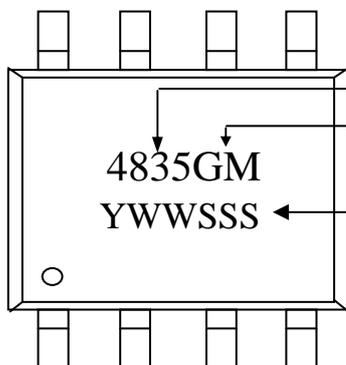

Product: AP4835
 Package:
 GM = RoHS-compliant halogen-free SO-8
 Date/lot code (YWWSSS)
 Y: Last digit of the year
 WW: Work week
 SSS: Lot code sequence