

# MPU-250 Series

## Single Output 250W Power Factor Corrected AC/DC Power Supplies



### Key Features:

- Small 250W Supply
- PFC to EN 61000-3-2 "A"
- EN 60950 Approved (UL)
- CE Certified
- FCC Class B Emissions
- Universal AC Input
- Small 5" x 3.2" x 1.5" Size

### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Autoranging	90		132	VAC
		180		264	
Input Frequency		47		63	Hz
Input Current, Full Load	110 VAC		6		A
	220 VAC		3		
Inrush Current, Cold Start	110 VAC			35	A
	220 VAC			70	
Leakage Current	264 VAC			1.0	mA
Power Factor Correction	Meets EN 61000-3-2 Class A				
Input Protection	T8A/250V Fuse				

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Adjustment	By Trim Pot		±5.0		%
Output Regulation, See Note 1			±1.0		%
Hold Time	110 VAC, 80% Load	20			mSec
Ripple & Noise (20 MHz) See Note 2	See Model Selection Guide				
Overload Protection	Autorecovery	110		140	%
Over Voltage Protection	>130% of Rated Output Voltage. Recycle AC Input.				
Over Temperature Protection	Autorecovery		+110		°C
Temperature Coefficient			±0.04		%/°C
Transient Recovery Time, See Note 4	50% Load Change		2.5		mS
Transient Response Deviation				5	
Overshoot/Undershoot	At Turn On/Off			±5.0	%
Turn On Delay	230 VAC			1	S
Output Short Circuit	Continuous With Autorecovery				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage, See Note 5	Input - Output	3,000			VAC
	Input - FG (Frame Ground)	1,500			
	Primary - Core	1,500			
Switching Frequency	Fixed		25		kHz

#### Interface Signals

Power Supply On	Green LED on the PCB
Power Good Signal	Goes TTL high 100 to 500 mS after regulation. Goes low at least 1 mS before the loss of regulation.
Remote On/Off	A TTL low signal inhibits the output. Hiccup mode.

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	0	+25	+70	°C
Output Derating	2.5%/ °C from +50 °C to +70 °C				
Storage Temperature Range		-20		+85	°C
Cooling	See Model Selection Guide				
Operating Humidity	RH, Non-condensing			90	%

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 30°C, Gnd Benign	100			kHours
Safety Standards	UL 60950, EN 60950				
EMI Compliance	Compliance to EN 55022 (CISPR22) Class B; EN 61000-3-2,3				
EMS Immunity Compliance	EN 61000-4-2,3,4,5,6,11; EN 55024; CE Marked (LVD)				
Vibration	Sinusoidal 5-50 Hz, Acceleration ±7.35 m/s <sup>2</sup> on X, Y & Z Axis				



### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



[www.micropowerdirect.com](http://www.micropowerdirect.com)

Model Number	Output Voltage (VDC)		Output Current (Max A)		Ripple & Noise (% p-p)	Efficiency (%)
	PreSet	Range	Convection	With 16 CFM		
MPU-250S-12YZ	12 VDC	11.0 - 13.8	11.25	20.83	±1%	83%
MPU-250S-15YZ	15 VDC	14.0 - 15.5	9.00	16.66	±1%	83%
MPU-250S-24YZ	24 VDC	21.0 - 26.0	5.62	10.41	±1%	83%
MPU-250S-36YZ	36 VDC	35.0 - 42.0	3.75	5.21	±1%	83%

Notes:

- Output regulation includes line & load.
- Ripple & noise is measured from 10 kHz to 20 MHz. Connection to the unit is made with a 0.1 µF ceramic capacitor & a 22 µF electrolytic capacitor connected in parallel.
- A 1% minimum load is required to maintain regulation & ripple specifications.
- Transient recovery is measured to within a 1% error band for a load step of 50% to 100%.
- Isolation specifications are production HI-Pot tested for 3 seconds.
- The full output range (see table) is covered in the safety agency certification. Standard models are factory set to the Preset voltage, but may be set to other levels within the range without affecting the agency certification. For more information, contact the factory.
- Output power is given for the factory preset voltage. The maximum continuous output power level is 135W without providing 16 CFM airflow. All models provide a peak power level of 600W for a maximum duration of 500 µS. For more information, contact the factory.
- Each unit includes an input fuse (250V/8A). Since this fuse is not field replaceable, it is recommended that an external fuse of the same size be used on the input of the power supply for protection.


Model Number

**MPU-250S-XXYZ**



Models with other output voltage levels are available (i.e. 5 VDC, 48 VDC, etc)  
Contact the factory for details at:  
sales@micropowerdirect.com

Mechanical Dimensions

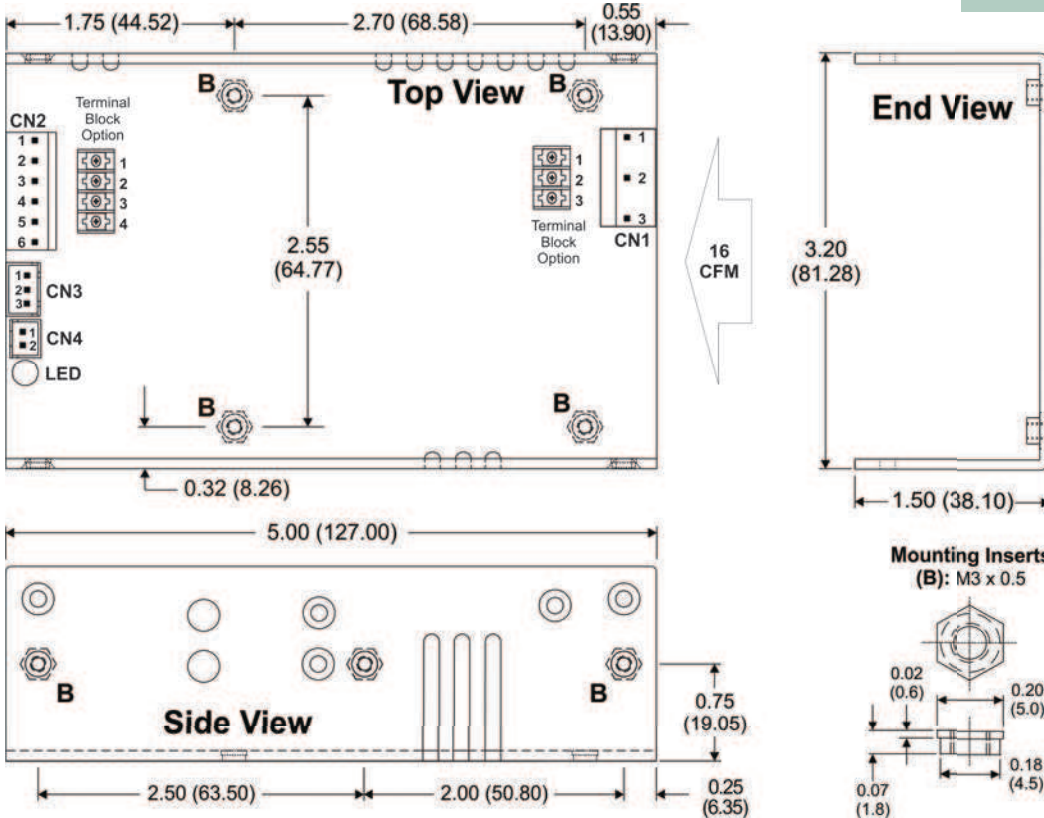

Connections

Input Connector (CN1):

- Terminal Block: Howder HD-601-3P, 3 pins, 6.35 mm Centers
- Molex Mating Part No: Molex 09-91-0500 or equivalent (two pins removed)

Pin	Function
1	AC-Line
2	AC-Neutral
3	Field Ground

Output Connector (CN2):

- Terminal Block: Howder HD-601-4P, 4 pins, 6.35 mm Centers
- Molex Mating Part No: Molex 09-91-0600 or equivalent

Pin	Molex	Pin	Howder
1	+V <sub>OUT</sub>	1	+V <sub>OUT</sub>
2	+V <sub>OUT</sub>	2	+V <sub>OUT</sub>
3	+V <sub>OUT</sub>	3	-V <sub>OUT</sub>
4	-V <sub>OUT</sub>	4	-V <sub>OUT</sub>
5	-V <sub>OUT</sub>		
6	-V <sub>OUT</sub>		

Logic Signal Connector (CN3):

- Mating Part No: JST XHP-3 or equivalent (CHYAO SHIUNN JS-2001-03)
- Mating Pins: JST SXH-002T-PO.6 For AWG 30 to 26


Pin	Function
1	Power Good
2	Remote On/Off
3	Common

Fan Driver Connector (CN4):

- Mating Part No: JST XHP-2 or equivalent (CHYAO SHIUNN JS-2001-2)

Pin	Function
1	Minus
2	Plus

U-Chassis Cover (C Suffix)

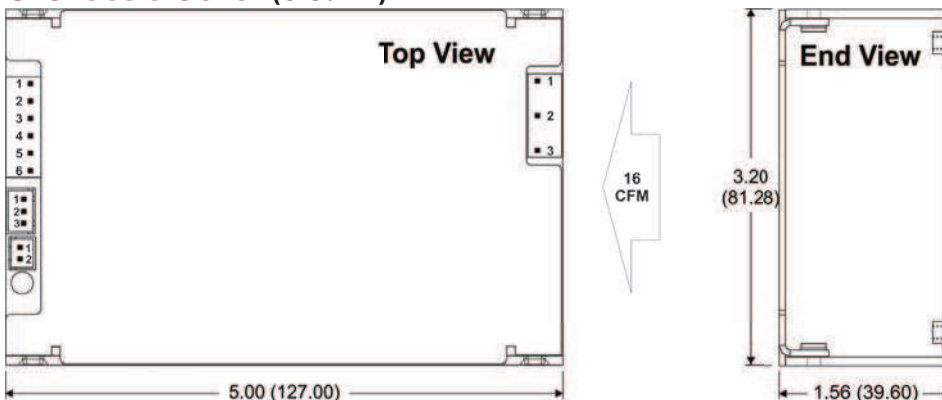

**MicroPower Direct**  
 We Power Your Success - For Less!

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)