

# A100ERU Series

## Single & Dual Output, 1.5W Ultra-Wide Input Range DC/DC Converters



### Key Features:

- 1.5W Output Power
- 4:1 Input Voltage Range
- 1,500 VDC Isolation
- -40°C to +85°C Temp Range
- Compact DIP Case
- Single & Dual Outputs
- 1.0 MH MTBF
- Industry Standard Pin-Out
- **Low, Low Cost!**



### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range, See Note 1	24 VDC Input	9.0	24.0	36.0	VDC
	48 VDC Input	18.0	48.0	72.0	
Input Filter	Capacitors				
Short Circuit Input Power			1,000		mW

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0	±3.0	%
Output Voltage Balance	Dual Output , Balanced Loads		±3.0		%
Line Regulation	Vin = Min to Max		±0.2	±0.75	%
Load Regulation	Iout = 10% to 100%		±0.5	±2.0	%
Noise (20 Hz - 300 kHz)	See Note 2		50	100	mV P - P
Ripple (DC - 20 MHz)				50	mV P - P
Output Power Protection		120			%
Temperature Coefficient				±0.03	%/°C
Output Short Circuit	Continuous (Autorecovery)				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,500			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance			100		pF
Switching Frequency				550	kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40		+85	°C
Storage Temperature Range		-50		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing		95		%

#### Physical

Case Size, See Note 3	1.25 x 0.80 x 0.37 Inches (31.8 x 20.3 x 9.5 mm)				
Case Material, See Note 3	Non-Conductive Black Plastic (UL94V-0)				
Weight	0.52 Oz (15g)				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.0			MHours

#### Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	24 VDC Input	-0.7		50.0	VDC
	48 VDC Input	-0.7		100.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C
Internal Power Dissipation	All Models			1,500	mW

**Caution:** Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


[www.micropowerdirect.com](http://www.micropowerdirect.com)

Model Number	Input				Output			Efficiency (% , Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)		
	Nominal	Range	Full-Load	No-Load					
A101ERU	24	9.0 - 36.0	86	20	3.3	500	50.0	73	200
A102ERU	24	9.0 - 36.0	83	20	5.0	300	30.0	75	200
A103ERU	24	9.0 - 36.0	80	20	9.0	167	17.0	78	200
A104ERU	24	9.0 - 36.0	78	20	12.0	125	12.0	80	200
A105ERU	24	9.0 - 36.0	77	20	15.0	100	10.0	81	200
A106ERU	24	9.0 - 36.0	85	20	±5.0	±150	±15.0	73	200
A107ERU	24	9.0 - 36.0	80	20	±12.0	±63	±6.0	78	200
A108ERU	24	9.0 - 36.0	79	20	±15.0	±50	±5.0	79	200
A111ERU	48	18.0 - 72.0	43	10	3.3	500	50.0	72	150
A112ERU	48	18.0 - 72.0	42	10	5.0	300	30.0	74	150
A113ERU	48	18.0 - 72.0	40	10	5.0	167	17.0	77	150
A114ERU	48	18.0 - 72.0	39	10	12.0	125	12.0	79	150
A115ERU	48	18.0 - 72.0	39	10	15.0	100	10.0	80	150
A116ERU	48	18.0 - 72.0	43	10	±5.0	±150	±15.0	72	150
A117ERU	48	18.0 - 72.0	40	10	±12.0	±63	±6.0	77	150
A118ERU	48	18.0 - 72.0	40	10	±15.0	±50	±5.0	78	150

For models with a metal case, add an "M" to the model number (ie: A115ERUM)


- Notes:**
- Exceeding the input range by a significant margin may damage the units. For 24V input the input voltage should not exceed 40V; for 48V models it should not exceed 80V.
  - When measuring output ripple, it is recommended that an external 0.33 μF ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units.
  - The optional metal package is nickel plated steel. Dimensions are 1.25 x 0.80 x 0.39 Inches (31.8 x 20.3 x 10.0 mm).
  - These units should not be operated with a load under the specified minimum. Operation at no-load will increase ripple significantly and may cause damage to the unit.
  - These converters are specified for operation without external components. However, in some applications the addition of input/output capacitors will enhance stability and reduce output ripple. Recommended capacitor values are:

**Derating Curve**

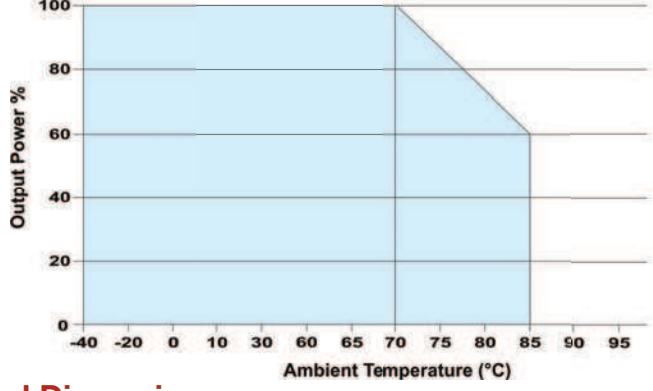

Vin (VDC)	Input Capacitor	Vout (VDC)	Output Capacitor	
			0 to +70°C (Electrolytic)	-40 to +85°C (Tantalum)
24	Sing 10 μF	3.3	100 μF	47 μF
	Dual 10 ~ 47 μF	5	100 μF	47 μF
48	Sing 10 μF	12	100 μF	47 μF
	Dual 10 ~ 47 μF	15	100 μF	47 μF

**Mechanical Dimensions**

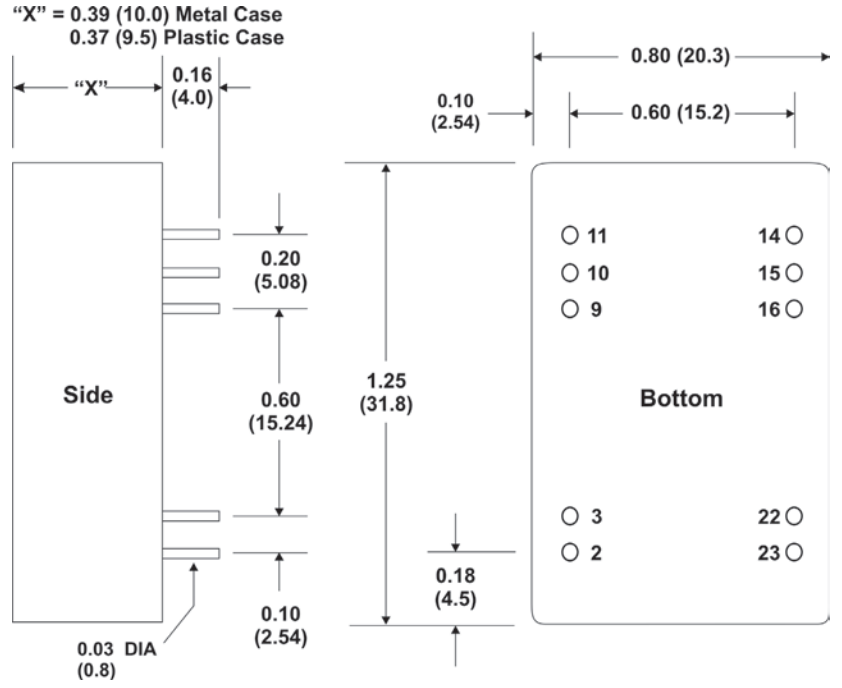

**Pin Connections**

Pin	Single	Dual
2, 3	-Vin	-Vin
9	No Pin	Common
10	NC	NC
11	NC	-Vout
14	+Vout	+Vout
15	NC	NC
16	-Vout	Common
22, 23	+Vin	+Vin

NC: No Connection

**Mechanical Notes:**

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)



**MicroPower Direct**  
 We Power Your Success - For Less!