


# E2001 Series

## High Isolation, 2W Ultra-Miniature, SIP DC/DC Converters

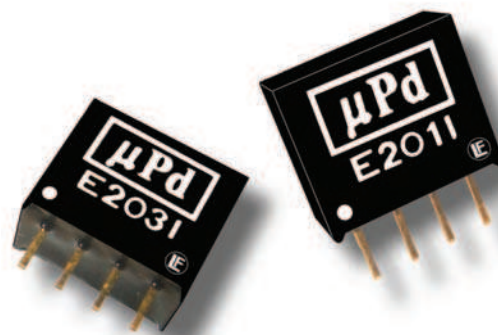

### Key Features:

- 2W Output Power
- Ultra-Miniature SIP Case
- 3,000 VDC Isolation
- >2 MHour MTBF
- 18 Standard Models
- Industry Standard Pin-Out



**RoHS Compliant**

### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerelectronics.com  
W: www.micropowerelectronics.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

| Parameter                      | Conditions         | Min. | Typ. | Max. | Units |
|--------------------------------|--------------------|------|------|------|-------|
| Input Voltage Range            | 5 VDC Input        | 4.5  | 5.0  | 5.5  | VDC   |
|                                | 12 VDC Input       | 10.8 | 12.0 | 13.2 |       |
|                                | 24 VDC Input       | 21.6 | 24.0 | 26.4 |       |
|                                | 48 VDC Input       | 44.0 | 48.0 | 52.0 |       |
| Reverse Polarity Input Current |                    |      |      | 0.3  | A     |
| Input Filter                   | Internal Capacitor |      |      |      |       |

#### Output

| Parameter                        | Conditions                | Min. | Typ.  | Max.  | Units    |
|----------------------------------|---------------------------|------|-------|-------|----------|
| Output Voltage Accuracy          |                           |      |       | ±3.0  | %        |
| Line Regulation                  | For Vin Change of 1%      |      | ±1.2  |       | %        |
| Load Regulation (Note 1)         | See Model Selection Guide |      |       |       |          |
| Ripple & Noise (20 MHz) (Note 2) |                           |      |       | 100   | mV P - P |
| Output Power Protection          |                           | 120  |       |       | %        |
| Temperature Coefficient          |                           |      | ±0.01 | ±0.02 | %/°C     |
| Output Short Circuit             | Momentary (0.5 Sec.)      |      |       |       |          |

#### General

| Parameter             | Conditions  | Min.  | Typ. | Max. | Units |
|-----------------------|-------------|-------|------|------|-------|
| Isolation Voltage     | 60 Seconds  | 3,000 |      |      | VDC   |
| Isolation Resistance  | 1,000 VDC   | 1,000 |      |      | MΩ    |
| Isolation Capacitance | 100 kHz, 1V |       | 60   |      | pF    |
| Switching Frequency   |             |       | 125  |      | kHz   |

#### Environmental

| Parameter                   | Conditions          | Min. | Typ. | Max. | Units |
|-----------------------------|---------------------|------|------|------|-------|
| Operating Temperature Range | Ambient             | -40  | +25  | +85  | °C    |
| Operating Temperature Range | Case                |      |      | +90  | °C    |
| Storage Temperature Range   |                     | -55  |      | +125 | °C    |
| Cooling                     | Free Air Convection |      |      |      |       |
| Humidity                    | RH, Non-condensing  |      |      | 95   | %     |

#### Physical

|               |   |  |  |  |  |
|---------------|---|--|--|--|--|
| Case Size     | 0.46 x 0.29 x 0.40 Inches (11.68 x 7.5 x 10.2 mm) |  |  |  |  |
| Case Material | Non-Conductive Black Plastic (UL94-V0)            |  |  |  |  |
| Weight        | 0.06 Oz (1.8g)                                    |  |  |  |  |

#### Reliability Specifications

| Parameter | Conditions                      | Min. | Typ. | Max. | Units  |
|-----------|---------------------------------|------|------|------|--------|
| MTBF      | MIL HDBK 217F, 25°C, Gnd Benign | 2.0  |      |      | MHours |

#### Absolute Maximum Ratings

| Parameter                   | Conditions                  | Min. | Typ. | Max. | Units |
|-----------------------------|-----------------------------|------|------|------|-------|
| Input Voltage Surge (1 Sec) | 5 VDC Input                 | -0.7 |      | 9.0  | VDC   |
|                             | 12 VDC Input                | -0.7 |      | 18.0 |       |
|                             | 24 VDC Input                | -0.7 |      | 30.0 |       |
|                             | 48 VDC Input                | -0.7 |      | 55.0 |       |
| Lead Temperature            | 1.5 mm From Case For 10 Sec |      |      | 260  | °C    |
| Internal Power Dissipation  | All Models                  |      |      | 650  | mW    |

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


## Model Selection Guide

| Model Number | Input Voltage (VDC) |             | Input Current (mA) |         | Output Voltage (VDC) | Output Current (mA, Max) | Output Current (mA, Min) | Load Regulation (% Max) | Efficiency (% Typ) | Fuse Rating Slow-Blow (mA) |
|--------------|---------------------|-------------|--------------------|---------|----------------------|--------------------------|--------------------------|-------------------------|--------------------|----------------------------|
|              | Nominal             | Range       | Full-Load          | No-Load |                      |                          |                          |                         |                    |                            |
| E201I        | 5                   | 4.5 - 5.5   | 372                | 38      | 3.3                  | 400.0                    | 40.0                     | 12                      | 71                 | 1,000                      |
| E202I        | 5                   | 4.5 - 5.5   | 533                | 38      | 5.0                  | 400.0                    | 40.0                     | 12                      | 75                 | 1,000                      |
| E203I        | 5                   | 4.5 - 5.5   | 500                | 38      | 9.0                  | 222.0                    | 22.0                     | 8                       | 79                 | 1,000                      |
| E204I        | 5                   | 4.5 - 5.5   | 500                | 38      | 12.0                 | 167.0                    | 16.0                     | 8                       | 80                 | 1,000                      |
| E205I        | 5                   | 4.5 - 5.5   | 500                | 38      | 15.0                 | 133.0                    | 13.0                     | 8                       | 80                 | 1,000                      |
| E211I        | 12                  | 10.8 - 13.2 | 150                | 30      | 3.3                  | 400.0                    | 40.0                     | 8                       | 73                 | 500                        |
| E212I        | 12                  | 10.8 - 13.2 | 200                | 30      | 5.0                  | 400.0                    | 40.0                     | 8                       | 77                 | 500                        |
| E213I        | 12                  | 10.8 - 13.2 | 211                | 30      | 9.0                  | 222.0                    | 22.0                     | 8                       | 79                 | 500                        |
| E214I        | 12                  | 10.8 - 13.2 | 199                | 25      | 12.0                 | 167.0                    | 16.0                     | 8                       | 84                 | 500                        |
| E215I        | 12                  | 10.8 - 13.2 | 208                | 25      | 15.0                 | 133.0                    | 13.0                     | 8                       | 80                 | 500                        |
| E222I        | 24                  | 21.6 - 26.4 | 107                | 12      | 5.0                  | 400.0                    | 40.0                     | 8                       | 78                 | 200                        |
| E223I        | 24                  | 21.6 - 26.4 | 102                | 12      | 9.0                  | 222.0                    | 22.0                     | 8                       | 82                 | 200                        |
| E224I        | 24                  | 21.6 - 26.4 | 104                | 12      | 12.0                 | 167.0                    | 16.0                     | 8                       | 80                 | 200                        |
| E225I        | 24                  | 21.6 - 26.4 | 102                | 12      | 15.0                 | 133.0                    | 13.0                     | 8                       | 82                 | 200                        |
| E232I        | 48                  | 44.0 - 52.0 | 53                 | 6       | 5.0                  | 400.0                    | 40.0                     | 8                       | 78                 | 100                        |
| E233I        | 48                  | 44.0 - 52.0 | 52                 | 6       | 9.0                  | 222.0                    | 22.0                     | 8                       | 80                 | 100                        |
| E234I        | 48                  | 44.0 - 52.0 | 53                 | 6       | 12.0                 | 167.0                    | 16.0                     | 8                       | 78                 | 100                        |
| E235I        | 48                  | 44.0 - 52.0 | 52                 | 6       | 15.0                 | 133.0                    | 13.0                     | 8                       | 80                 | 100                        |

### Notes:

- Output load regulation is specified for a load change of 20% to 100%.
- When measuring output ripple, it is recommended that an external 0.33  $\mu\text{F}$  ceramic capacitor be placed from the +Vout pin to the -Vout pin.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- The 5V, 12V and 24V input units do not require external components to operate, but the use of a low ESR capacitor (approximately 10  $\mu\text{F}$ , ESR < 1.0 $\Omega$  at 100 kHz) mounted close to the converter input pins is recommended.  
For 48 VDC input units, an input capacitor should always be used. Dependent upon the application, a value between 4.7  $\mu\text{F}$  and 47  $\mu\text{F}$  should be sufficient.
- Output capacitive load capability of these units is 33  $\mu\text{F}$  max. Exceeding this may cause start up problems.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

## Derating Curve

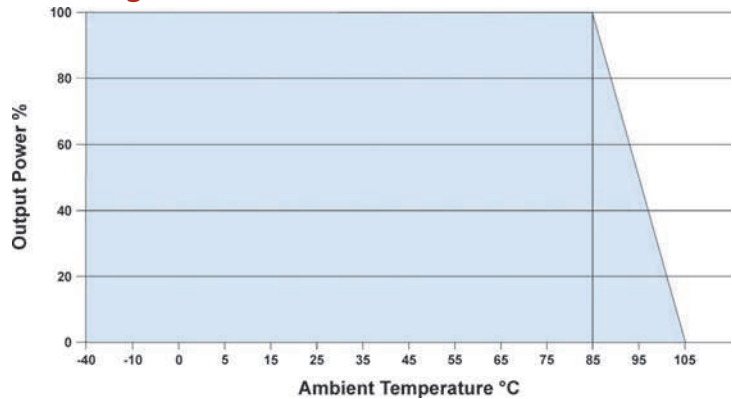


## Pin Connections

| Pin | Description |
|-----|-------------|
| 1   | -Vin        |
| 2   | +Vin        |
| 3   | -Vout       |
| 4   | +Vout       |

### Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx =  $\pm 0.01$  ( $\pm 0.25$ )
- Pin 1 is marked by a "dot" or indentation on the side of the unit

## Mechanical Dimensions

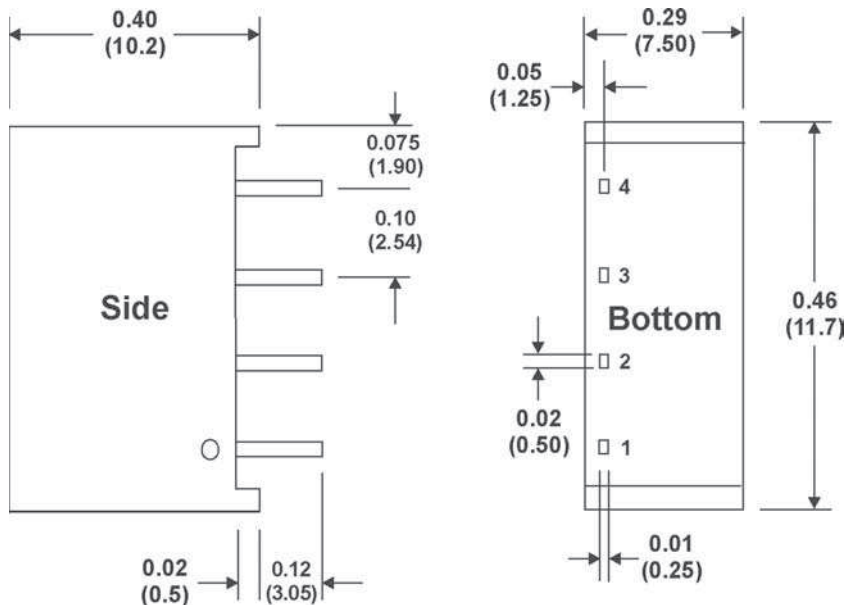

**MicroPower Direct**  
www.micropowerdirect.com