

ALUMINUM ELECTROLYTIC CAPACITOR

Suntan®

FOR PHOTO FLASH

TS13D CD171

FEATURES

- High stability
- Small capacitance change
- Low dissipation factor, Low leakage current




◆ Specifications

ITEMS PERFORMANCE CHARACTERISTICS	
Operating Temperature Range(°C)	-20~+55
Rated Voltage Range	330WV.DC
Voltage Proof	350SV.DC
Capacitance Tolerance(20°C, 120Hz)	-10%~+20%
Dissipation Factor(20°C, 120Hz)	0.06 Max
Leakage Current	I=1xC (20°C, after 5 minutes) Max I: Leakage Current (μA) C: Rated Capacitance (μF)

◆ Dimensions

mm

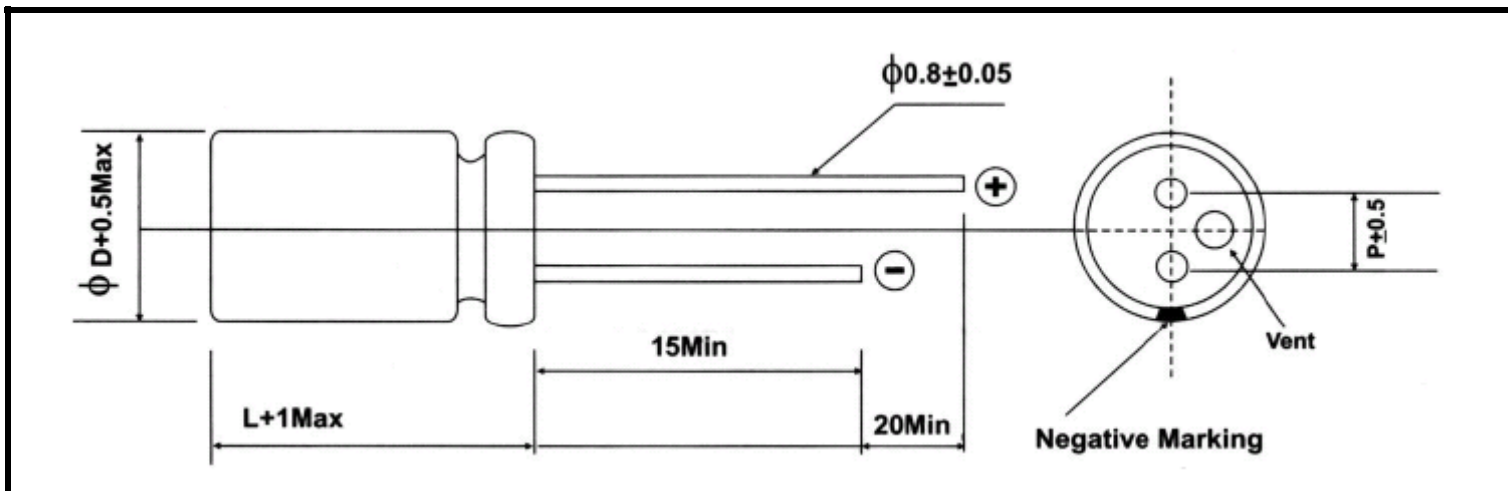

◆ Standard ratings

Capacitance (μF)	ΦD(mm)	12.5	13.0	13.5	14.0	14.5	16.0	18.0	20.0
P		5.0	5.0	5.0	5.0	7.5	7.5	7.5	7.5
80	L (mm)	26.5	24.5	23.0	--	--	--	--	--
100		30.5	28.0	26.5	25.0	--	--	--	--
120		35.0	31.5	29.5	28.0	26.5	--	--	--
140		39.5	35.5	33.0	31.0	29.0	26.0	--	--
160		44.0	39.5	36.5	34.0	32.0	28.5	25.0	--
180		48.0	43.5	40.5	37.5	35.0	30.0	27.0	--
200		--	47.5	44.0	40.5	38.0	32.5	29.0	26.0
220		--	52.0	47.0	44.0	41.0	35.0	30.5	28.0
250		--	--	--	48.5	45.0	38.5	33.5	30.0
300		--	--	--	--	--	44.5	39.0	34.0

Note: Specification are subject to change without notice. For more detail and update, please visit our website.