

# KBPC35005W THRU KBPC3510W

High Current 35 AMPS. Single Phase Glass Passivated Bridge Rectifiers

Voltage Range 50 to 1000 Volts

Current 35 Amperes


## FEATURES

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction technique results in inexpensive product
- ◆ High temperature soldering guaranteed:  
260°C / 10 seconds / 0.375" ( 9.5mm )  
lead length at 5 lbs., ( 2.3 kg ) tension
- ◆ UL Recognized File number: E347215

## Mechanical Data

- ◆ Case: Metal Case with Wire Leads
- ◆ Lead: solder plated
- ◆ Polarity: As marked

## KBPC-W

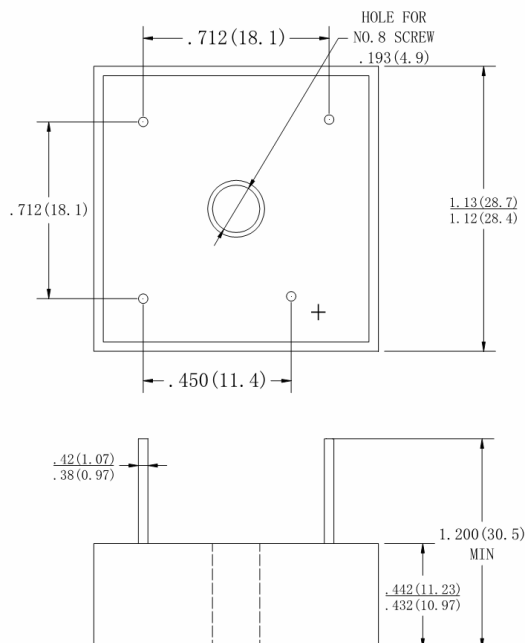

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number		KBPC 35005W	KBPC 3501W	KBPC 3502W	KBPC 3504W	KBPC 3506W	KBPC 3508W	KBPC 3510W	UNITS
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T <sub>C</sub> = 55°C	I(AV)	35							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	I <sub>FSM</sub>	400							A
Maximum Instantaneous Forward Voltage @17.5A	V <sub>F</sub>	1.1							V
Maximum DC Reverse Current at Rated DC Blocking voltage per Element	I <sub>R</sub>	10							μ A
Typical Thermal Resistance (Note)	Rθ <sub>JC</sub>	2.0							°C/W
Operating Temperature Range	T <sub>J</sub>	-55 to +150							°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150							°C

Note: Thermal Resistance from Junction to Case.

# KBPC35005W THRU KBPC3510W

High Current 35 AMPS. Single Phase Glass Passivated Bridge Rectifiers

Voltage Range 50 to 1000 Volts

Current 35 Amperes

## RATING AND CHARACTERISTIC CURVES KBPC35005W THRU KBPC3510W

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

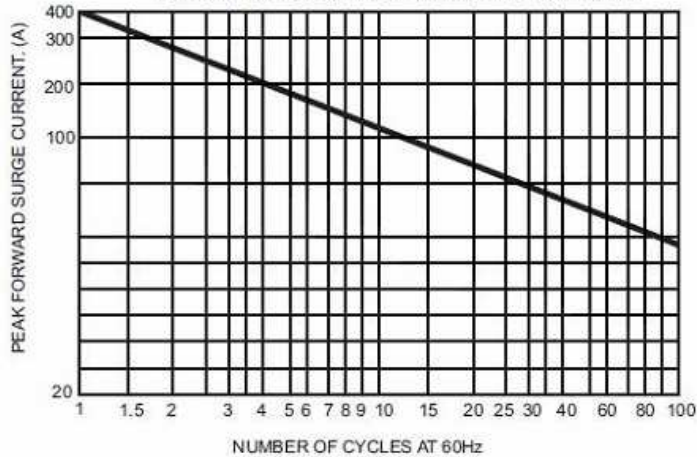


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

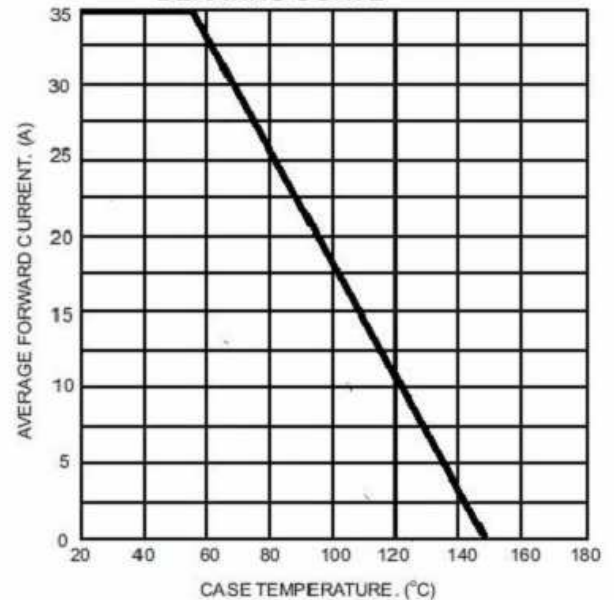


FIG. 3- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


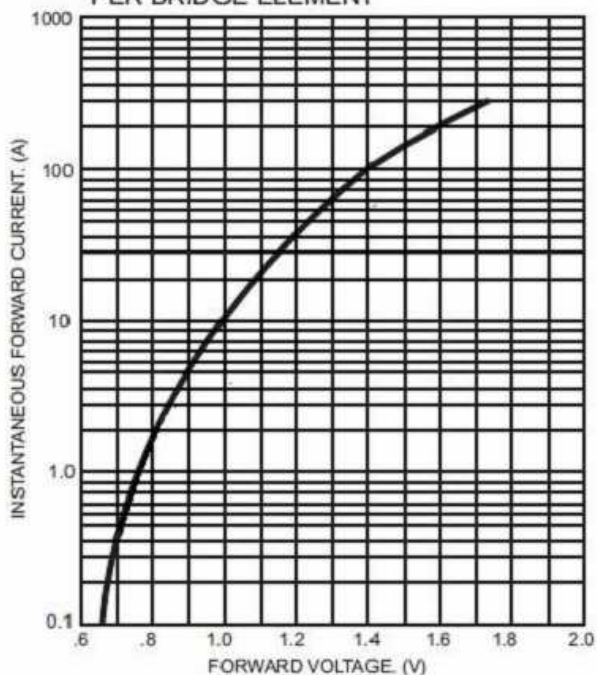


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

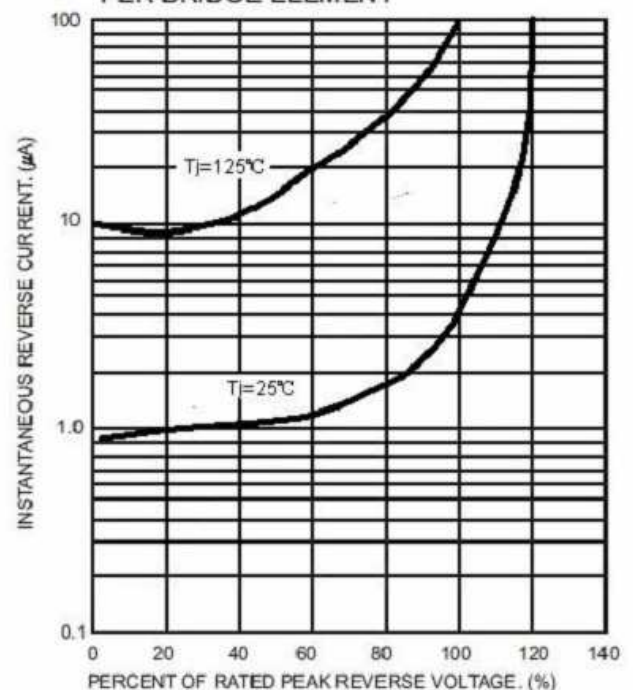

Note: Specification are subject to change without notice. For more detail and update, please visit our website.