


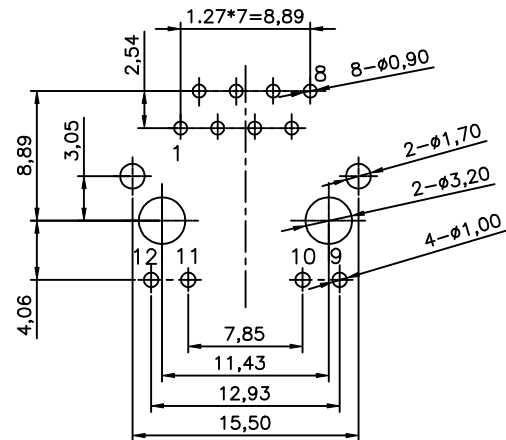

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS .
2. CURRENT RATING : 1.5 AMP .
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERATURE: 230~250°C (3~5 SECONDS)





MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS BPART NUMBER: E5J88-XXLPX-L

- 1-LED1:GREEN LED2:YELLOW
2-LED1:GREEN LED2:GREEN
3-LED1:YELLOW LED2:GREEN
E-LED1:GREEN LED2:RED
1-W/ O TAB
2-W/ TOP TABS
4-W/ TOP&SIDE TABS
- 1-3u" 2-6u"
3-15u" 4-30u" 5-50u"
0-W/O "FRE" LOGO
2-W/ "FRE" LOGO

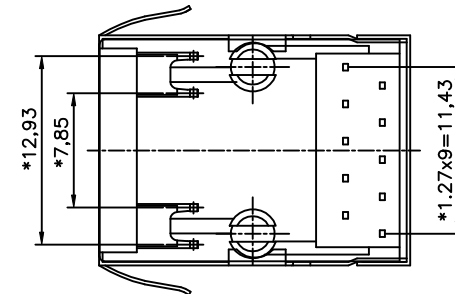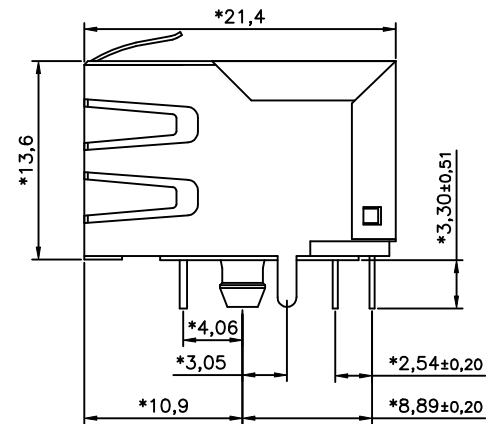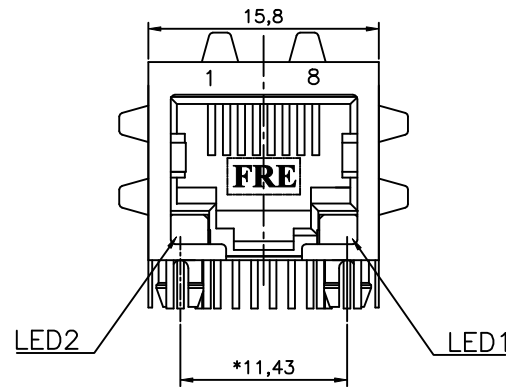

MM (INCH)		DFTO YANGLAN DATE 08/03/05		FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE 2005/08/08	TITLE	
MFO		DATE			
APPV LUSHENG		DATE 2005/08/08		SIDE ENTRY LED JACK	
MATERIAL :		QT'Y :		DRAWING NO. GE5J3012-LC	
FINISH :		SCALE : 2.5 : 1		/PART NO. SEE NOTE	
DO NOT SCALE DRAWING		SHEET 1 OF 1		SIZE A3	
REV 0 08/03/08					