

# POWER TRANSFORMERS

## For ON Semiconductor™ NCP 1200



**NEW!**



- ➊ Designed specifically for the ON Semiconductor NCP 1200 chipset
- ➋ PQ26/25 platform
- ➌ Materials meet UL 94V-0 requirements
- ➍ 50 Watt power handling capability



### Electrical Specifications @ 25°C — Operating Temperature -20°C to +85°C

Part Number	Turns Ratio* (Pri:Sec)	Turns Ratio* (Pri:Aux)	Primary Inductance (μH)	Leakage Inductance (μH)	DCR (mΩ)
PF0082	1:0.166	1:0.15	730	20	250 Pri 20 Sec
PF0091	1:0.166	—	730	20	250 Pri 20 Sec

\*NOTE: Other Turns Ratios can be developed on request. Please contact Pulse Applications Engineering for further information.

### Mechanical

### Schematics

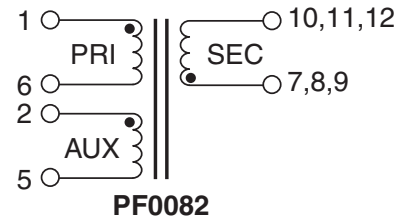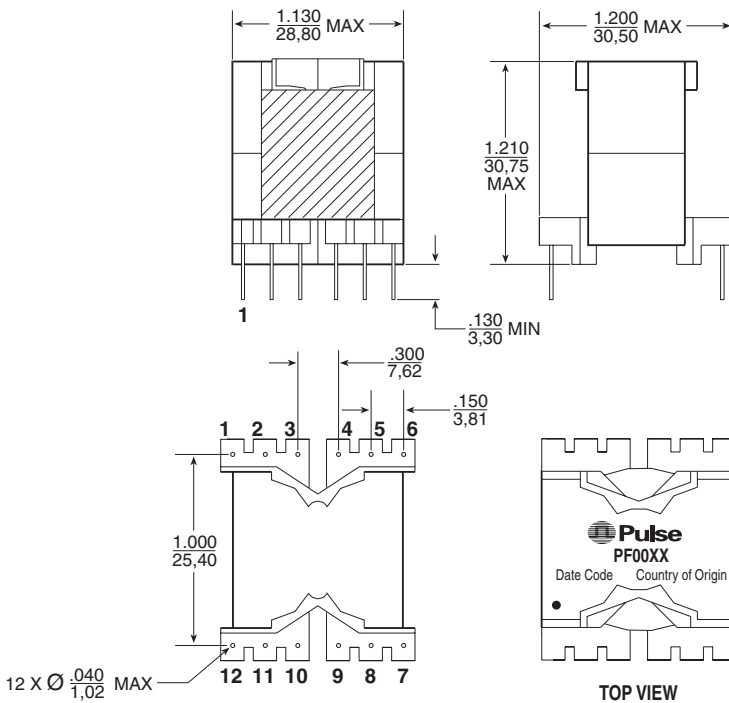

Weight . . . . . 52 grams  
Tray . . . . . 30/tray

Dimensions: Inches  
mm  
Unless otherwise specified,  
all tolerances are ± .010  
0,25

### For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (Great China)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.