

ELECTRICAL CHARACTERISTICS AT +25°C
 (PORT 1)

NOTES: UNLESS OTHERWISE SPECIFIED

1. THIS COMPONENT CONFORMS TO
- UL60950-1
- , UL FILE NO. IS:
- E133523
- .

WARNING: 	THIS COMPONENT IS RECOGNIZED BY ONE OR MORE SAFETY AGENCIES SUCH AS UL, VDE, CSA AND/OR TUV. ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER PRODUCT SAFETY DEPARTMENT FOR SAFETY AGENCY COMPLIANCE.	ECN APPROVAL:
		QA APPROVAL:
		DATE:


- 2.
- | | |
|---|--|
| NOTICE:

 | THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT. ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER. |
|---|--|

3. PLASTIC: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
-
4. SOLDERABILITY: CONFORMS TO ANSI/J-STD-002, 245°C REFLOW PEAK TEMPERATURE PER IPC/EIA J-STD-003A
-
5. OPERATING TEMPERATURE: -0°C TO +70°C
-
6. STORAGE TEMPERATURE: -20°C TO +125°C
-
7. JEDEC MOISTURE: LEVEL 1.
-
8. DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCES:
-
- .XX= ±.02
-
- .XXX= ±.010
-
9. REVISION: MP1,MP2, ARE PRELIMINARY.

No.	PARAMETER	SPECIFICATION
1	URNS RATIO: PRI:SEC @100 KHz, 0.2 VRMS	2:1 ±2%
2	OPEN CIRCUIT INDUCTANCE @10 KHz, 0.1 VRMS	(40-38)=(37-36)=1.2 mH MIN
3	LEAKAGE INDUCTANCE (LL): @100 KHz, 0.01 OR 0.02 VRMS	0.3 uH MAXIMUM
4	C _{ww} @ 100 KHz, 0.01 VRMS	35 pF MAX
5	DCR (Pri & Sec)	(1-3)=(4-5)= 0.7 OHMS MAX (40-38)=(37-36)= 1.2 OHMS MAX
6	HIPOT (PRI TO SEC)	1500 VRMS, 60 S
7	OPEN/SHORT TEST	10 MOHM MIN



NOTE: PORT 2, 3 AND 4 HAS THE SAME ELECTRICAL CHARACTERIASTICS AS PORT 1.

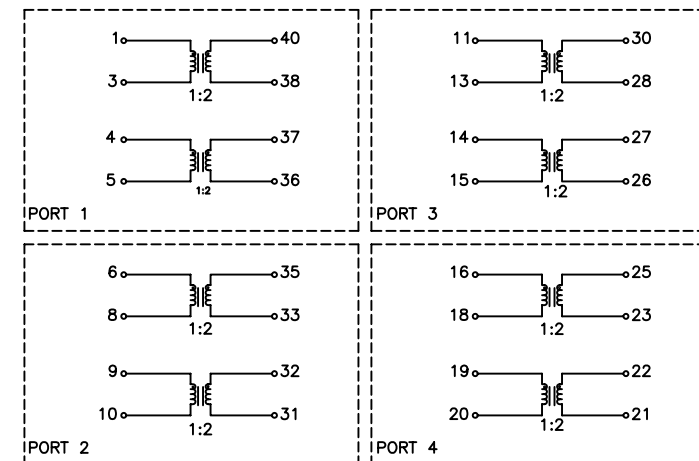



SCHEMATIC

© Copyright, 2013. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (08/07/13)

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION	PS DRAWING	SHEET:	DWG. NO./ PART NO.	REV.
	XFMR,OCTAL,T1,TOU,ET,1:2,OH	PS-2743.001-A	1	T1073FNL	MP2

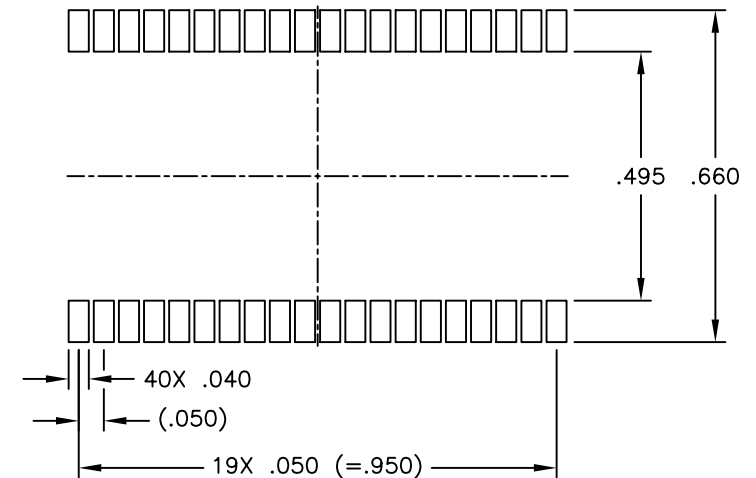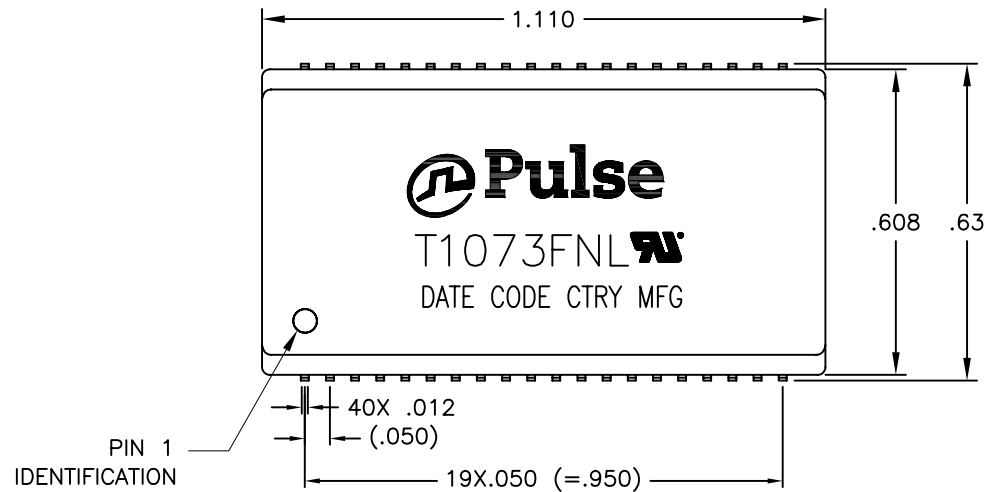

SUGGESTED PAD LAYOUT

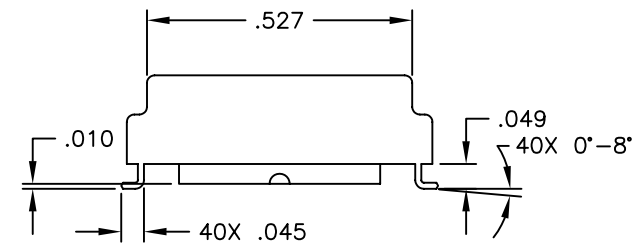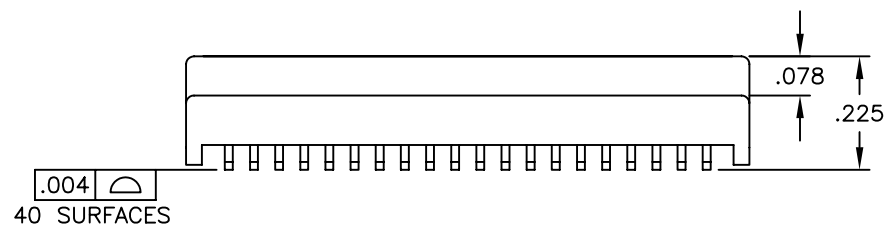

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION	PS DRAWING	SHEET:	DWG. NO./ PART NO.	REV.
	XFMR,OCTAL,T1,TOU,ET,1:2,OH	PS-2743.001-A	1	T1073FNL	MP2