



NOTES: UNLESS OTHERWISE SPECIFIED

- | | |
|---------|--|
| NOTICE: | THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT. |
| RoHS-6 | ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER. |
- PLASTIC: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- SOLDERABILITY: CONFORMS TO ANSI/J-STD-002
245°C REFLOW PEAK TEMPERATURE PER IPC/EIA J-STD-003A
- OPERATING TEMPERATURE: 0°C TO +70°C
- STORAGE TEMPERATURE: -20°C TO +125°C
- JEDEC MOISTURE: LEVEL 1.
- DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCES:
.XX = ±.01
.XXX = ±.005



ELECTRICAL CHARACTERISTICS:
ELECTRICAL: @ +25°C

No.	PARAMETER	SPECIFICATIONS
1	TURNS RATIO @ 10KHz, 0.02VRMS	$\frac{(16^{\circ}-15)}{(15^{\circ}-14)} = 5.0 \pm 2\%$ $\frac{(16^{\circ}-15)}{(1^{\circ}-3)} = 2.0 \pm 2\%$ $\frac{(15^{\circ}-14)}{(1^{\circ}-3)} = 0.4 \pm 2\%$ $\frac{(11^{\circ}-9)}{(6^{\circ}-8)} = 1.0 \pm 2\%$ $\frac{(11^{\circ}-10)}{(6^{\circ}-8)} = 0.793 \begin{smallmatrix} +1.75\% \\ -2.2\% \end{smallmatrix}$
2	OPEN CIRCUIT INDUCTANCE (OCL): @ 100KHz, 0.02VRMS	(1-3) = (6-8) = 1.0mH MINIMUM
3	LEAKAGE INDUCTANCE(LL) @ 100KHz, 0.02VRMS	(1-3) WITH (16-14) SHORT = 1.0 uH MAXIMUM (6-8) WITH (11-9) SHORT = 1.0 uH MAXIMUM
4	CWW(PRI TO SEC) @ 100KHz, 1 VRMS	(16-14) TO (1-3) = 35 pF MAXIMUM (6-8) TO (11-9) = 35 pF MAXIMUM
5	DC RESISTANCE (DCR)	(1-3) = 1.0 OHM MAXIMUM (6-8) = 1.0 OHM MAXIMUM
6	HIPOT (PRI TO SEC)	1500 VRMS MIN @ 60 SECONDS

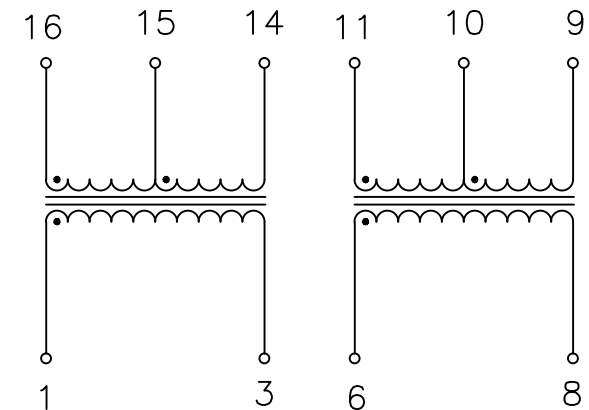

SCHEMATIC

NOTE: f IS FREQUENCY IN MHz.

© Copyright, 2013. Pulse Electronics, Inc. All rights reserved. Drawing specifications subject to change without notice. (8/2/13)

PULSE CONFIDENTIAL
&
PROPRIETARY





PRODUCT DESCRIPTION
XFMR,DUAL,T1,BH,ET,1:2/2.4,1:1, SMT

PS DRAWING
PS-2005.002-C

SHEET:
1

DWG. NO./ PART NO.
T1146FNL

REV.
M10

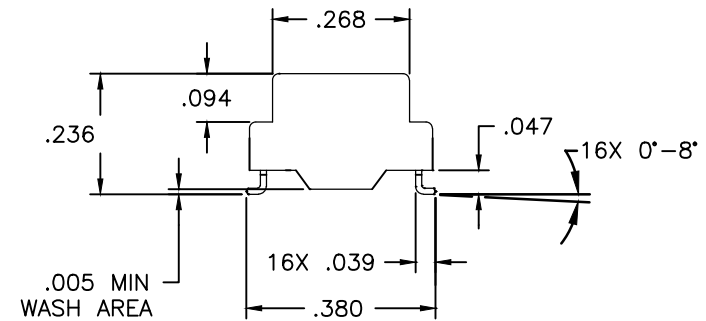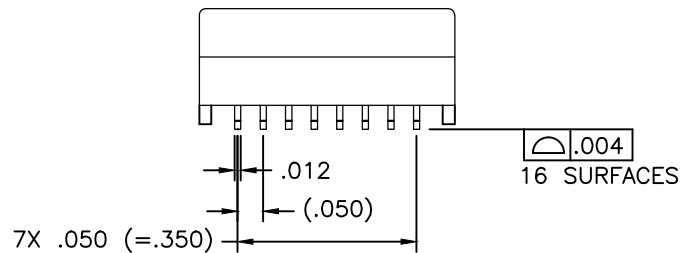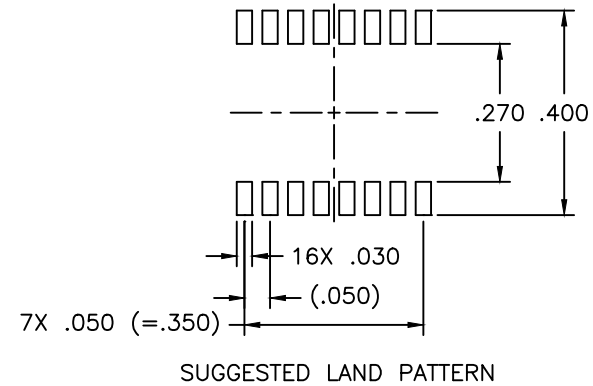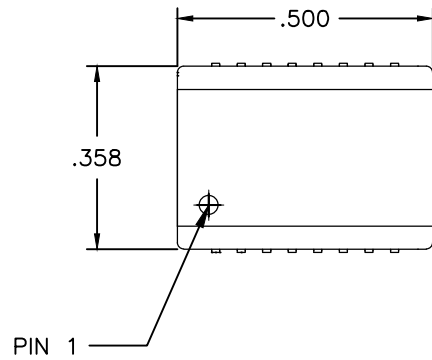

© Copyright, 2013. Pulse Electronics, Inc. All rights reserved. Drawing specifications subject to change without notice. (8/2/13)

PULSE CONFIDENTIAL
&
PROPRIETARY

PRODUCT DESCRIPTION

XFMR,DUAL,T1,BH,ET,1:2/2.4,1:1, SMT

PS DRAWING

PS-2005.002-C

SHEET:

2

DWG. NO./ PART NO.

T1146FNL

REV.

M10