


Internal Quad Band PWB Antenna

(43 x 17 x 0.5 mm, PWB antenna) Pulse Part Number: W3502

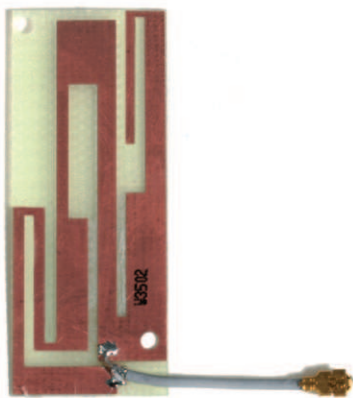

Features

- Small form factor
- Size W x L x H (43x 17 x 0.5 mm)
- Low weight (0.8 g)
- Cable feed with I-PEX connector (U.FL compatible)
- Cable length 20 mm (total 27.5mm)
- Lead free materials
- RoHS Compliant Product
- Mounting options:
With adhesive tape (not included into antenna)
Plastic pegs through holes in radiator, heat stacking

Applications

- Frequency range (GSM 850 / GSM 900 / DCS / PCS)

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on device mechanics

GSM 850: 824 – 894 MHz

Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
824 – 894	2.0	60 / -2.2	-6	50	-40 to +85

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas



Internal Quad Band PWB Antenna

(43 x 17 x 0.5 mm, PWB antenna) Pulse Part Number: W3502

GSM 900 : 880 – 960 MHz

Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
880 – 960	1.3	55 / -2.6	-6	50	-40 to +85

DCS : 1710 – 1880 MHz

Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
1710 – 1880	1.0	40 / -4.0	-4	50	-40 to +85

PCS : 1850 – 1990 MHz


Typical free space performance, measured in test unit mechanics

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [° C]
1850 – 1990	2.0	50 / -3.0	-6	50	-45 to +85

Cable and Connector Configuration

Cable length: 27.5 mm

Cable outer diameter: 1.13 mm

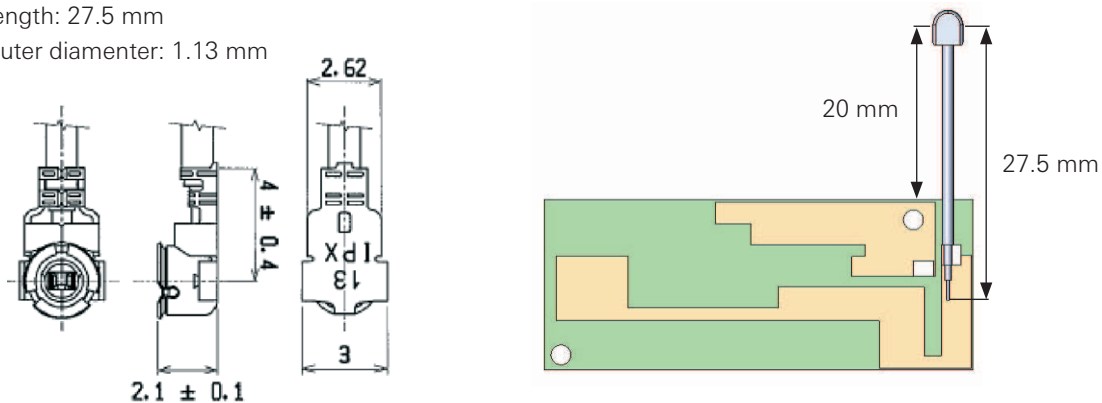

Pulse Finland Oy

Takatie 6

90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas

Pulse
A TECHNITROL COMPANY

© 2008. All Rights Reserved.




Internal Quad Band PWB Antenna

(43 x 17 x 0.5 mm, PWB antenna) Pulse Part Number: W3502

Test Unit and Antenna Location

Test unit size 110 x 58 x 28mm

Ground plane length 80mm

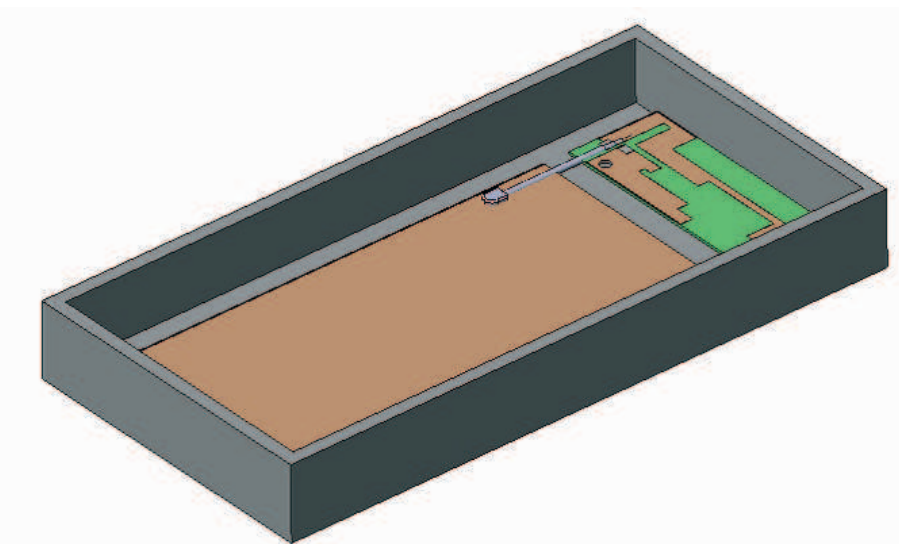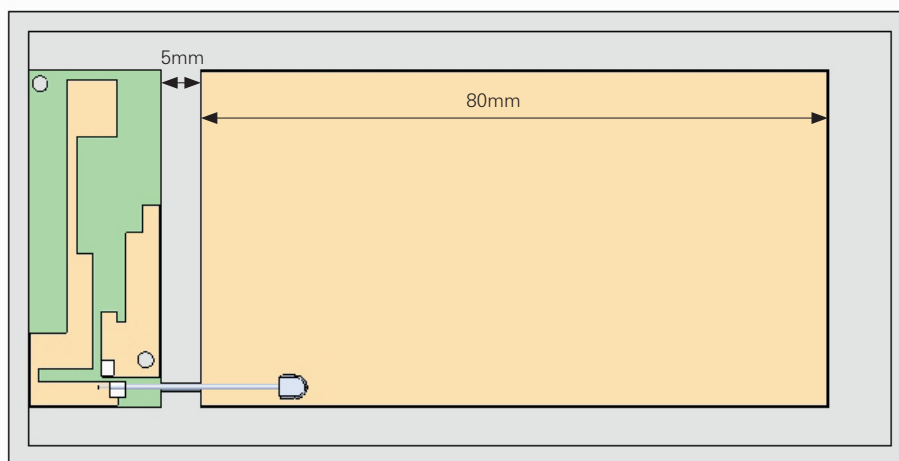



Internal Quad Band PWB Antenna


(43 x 17 x 0.5 mm, PWB antenna) Pulse Part Number: W3502

Typical Electrical Characteristics (T=25 °C)


Measured on the 80mm test board, Typical Return Loss S11/ impedance

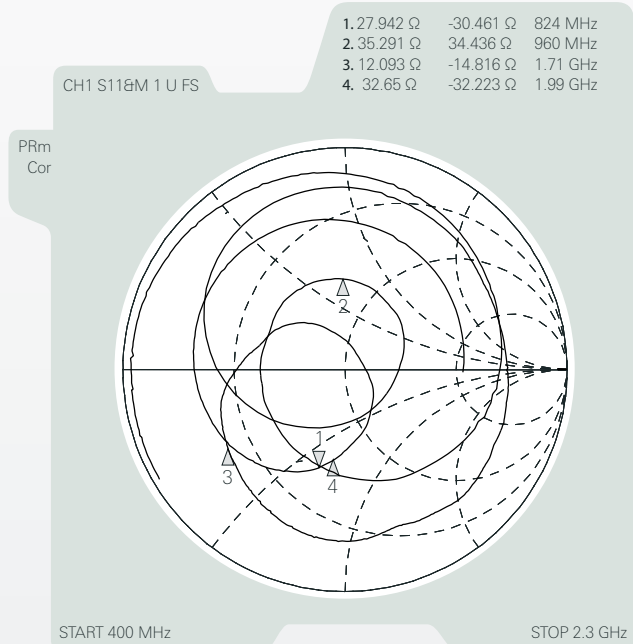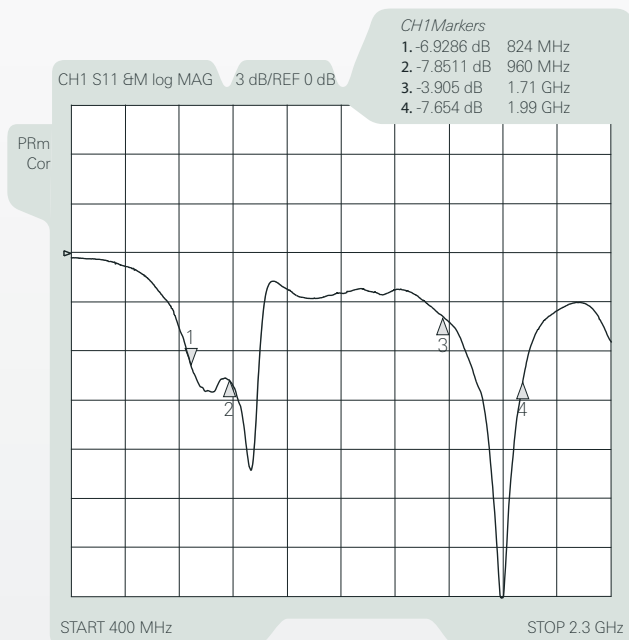

W3502 Total Radiation Efficiency free space

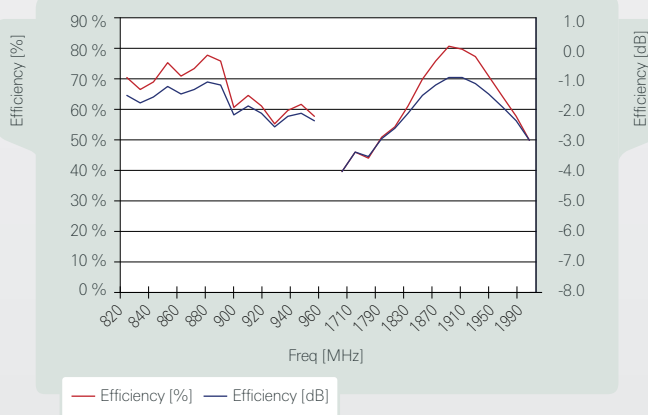

W3502 Maximum Radiation Gain free space

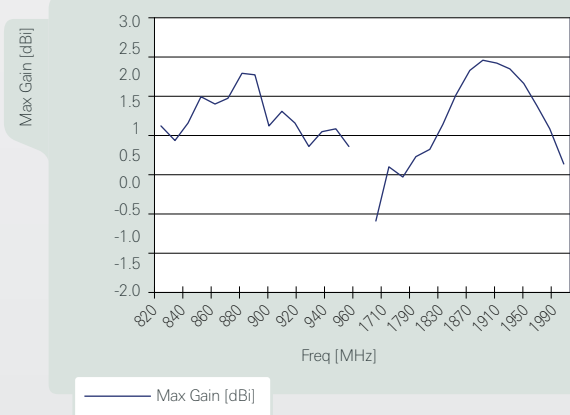

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

www.pulseeng.com/antennas

Pulse
A TECHNITROL COMPANY

© 2008. All Rights Reserved.