

Features

- Supply voltage optimized for Li+ battery voltage: 2.7V to 4.3V
- Pin-compatible to 2.0 x 1.2 mm (2012) XTAL SMD package⁽¹⁾
- Ultra-low power: 750 nA (typ)
- Oscillator output eliminates external load caps
- NanoDrive™ programmable output swing for lowest power
- Internal filtering eliminates external Vdd bypass cap
- Fixed 32.768 kHz output frequency
- <20 PPM initial stability
- <100 PPM stability over -40°C to +85°C
- Pb-free, RoHS and REACH compliant

Applications

- Wireless Mouse or Trackball
- Wireless Keypads
- Pulse-per-Second (pps) Timekeeping
- RTC Reference Clock
- Battery Management Timekeeping

Note: 1. For the smallest 32 kHz XO in CSP (1.2mm²), consider the SiT1542



Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Frequency and Stability						
Fixed Output Frequency	F _{out}		32.768		kHz	
Frequency Stability						
Frequency Stability ⁽²⁾	F _{stab}			20	PPM	T _A = 25°C, Vdd: 3.0V – 4.3V
				75		T _A = -10°C to +70°C, Vdd: 3.0V – 4.3V. Stability includes initial, power supply, and temperature stability components.
				100		T _A = -40°C to +85°C, Vdd: 3.0V – 4.3V. Stability includes initial, power supply, and temperature stability components.
				TBD		T _A = -40°C to +85°C, Vdd: 2.7V – 3.0V. Stability includes initial, power supply, and temperature stability components.
25°C Aging		-3		3	PPM	1st Year
Supply Voltage and Current Consumption						
Operating Supply Voltage	Vdd	2.7		4.3	V	T _A = -40°C to +85°C
		2.7		4.5	V	T _A = -10°C to +70°C
Power Supply Reset Voltage	Reset		1.8		V	
Core Operating Current ^(3, 4)	I _{dd}		0.75		μA	T _A = 25°C, Vdd: 2.7V – 4.3V. No Load
				TBD		T _A = -10°C to +70°C, Vdd max: 4.3V. No Load
				TBD		T _A = -40°C to +85°C, Vdd max: 4.3V. No Load
Output Stage Operating Current ⁽³⁾	I _{dd_out}		0.165		μA/Vpp	T _A = 25°C, Vdd: 2.7V – 4.3V No Load
T _{START-UP} at Power-up	T _{start}		150	TBD	ms	T _A = 25°C
Operating Temperature Range						
Commercial Temperature	T _{use}	-10		70	°C	
Industrial Temperature		-40		85	°C	
Rail-to-Rail Output Option						
Output Rise/Fall Time	t _r , t _f			200	ns	20-80%, 15 pF Load.
Output Clock Duty Cycle	DC	45		55	%	LVC MOS Output
Output Voltage High	VOH	Vdd - 1.54			V	Vdd: 2.7V – 4.3V. I _{OH} = -0.2μA, 15 pF
Output Voltage Low	VOL			50	mV	Vdd: 2.7V – 4.3V. I _{OL} = 0.2μA, 15 pF
NanoDrive™ Programmable, Reduced Swing Output						
Reduced Swing Output	V _{sw}	0.25		0.80	V	Vdd: 2.7V – 4.3V. For AC-coupled receiver
Output Voltage High Range	VOH	0.50		1.20	V	15 pF, I _{OH} = -0.2μA
Output Voltage Low Range	VOL	0.25		0.80	V	15 pF, I _{OL} = 0.2μA
Output Rise/Fall Time	t _r , t _f		80	TBD	ns	
Output Clock Duty Cycle	DC	45		55	%	
Jitter Performance (T_A = 25°C, Vdd = 3.0V to 4.3V, unless otherwise stated)						
Period Jitter	T _{djitt}		45		nSRMS	N = 10,000

Notes:

2. Stability is specified for two operating voltage ranges. Stability progressively degrades with supply voltage below 3.0V.
3. Core operating current does not include output driver operating current or load current.
4. To derive total operating current (no load), add core operating current + (0.165 μA/V) * (peak-to-peak output Voltage swing).

SiT1543

Ultra-Low Power 32.768 kHz XTAL SMD Replacement for Single-Cell Li+ Unregulated Battery Powered Applications




The Smart Timing Choice™

Pin Configuration

Pin	Symbol	I/O	Functionality
1	NC (X OUT)	No Connect, don't care	No Connect. Will not respond to any input signal. This pin is typically connected to the receiving IC's X Out pin. In this case, the SiT1543 will not be affected by the signal on this pin.
2	GND	Power Supply Ground	Connect to ground.
3	CLK Out (X IN)	OUT	Oscillator clock output. The CLK Out is typically connected to the receiving IC's X IN pin. The SiT1543 oscillator output includes an internal driver. As a result, the output swing is not dependent on capacitive loading. This makes the output much more flexible, layout independent, and robust under changing environmental and manufacturing conditions.
4	Vdd	Power Supply	Connect to power supply $2.7V \leq Vdd \leq 4.5V$. Under normal operating conditions, Vdd does not require external bypass/decoupling capacitor(s).

SMD Package (Top View)

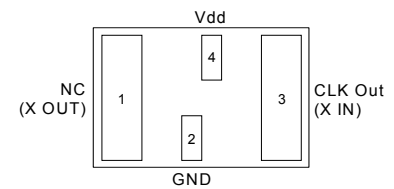

System Block Diagram

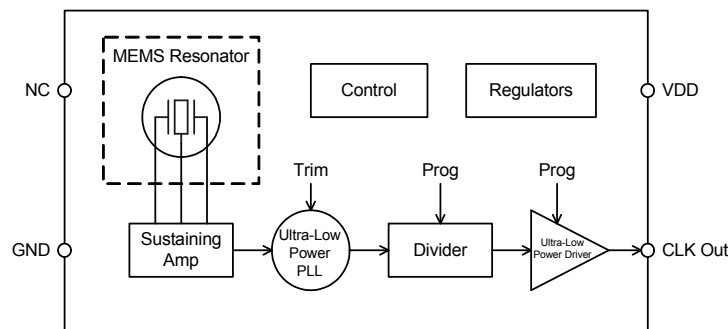


Figure 1.

Absolute Maximum

Attempted operation outside the absolute maximum ratings of the part may cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

Parameter	Symbol	Test Condition	Value	Unit
Power Supply Voltage Range (Vdd)	Vdd		-0.5 to 4.7	V
ESD Protection		HBM 100pF, 1.5kΩ	2000	V
ESD Protection		CDM, 25°C	750	V
ESD Protection		MM, 25°C	200	V
Latch-up Tolerance			JESD78 Compliant	
Mechanical Shock Resistance	$\Delta F/F$	Mil 883, Method 2002	50,000	g
Mechanical Vibration Resistance	$\Delta F/F$	Mil 883, Method 2005	70	g
2012 SMD Junction Temperature			TBD	
Storage Temperature			-65°C to 150°C	

Thermal Consideration

Package	θ_{JA} , 4 Layer Board (°C/W)	θ_{JA} , 2 Layer Board (°C/W)	θ_{JC} , Bottom (°C/W)
2012 SMD	TBD		

SiT1543

Ultra-Low Power 32.768 kHz XTAL SMD Replacement for Single-Cell Li+ Unregulated Battery Powered Applications

Description

The SiT1543 is an XTAL compatible, ultra-low power 32.768 kHz oscillator optimized for unregulated Li+ battery powered applications where the supply voltage must track the Li+ battery voltage from 4.3V down to 2.7V. The SiT1543 is pin-compatible and footprint compatible to existing 2012 XTALs when using the SiTime solder-pad layout (SPL). And unlike standard oscillators, the SiT1543 features NanoDrive[™], a factory programmable output that reduces the voltage swing to minimize power.

For applications that require the smallest footprint, consider the SiT1542 offered in a 1.5 x 0.8 mm CSP. Or, for lower operating voltage, consider the SiT1532/3 which operate down to 1.2V

XTAL Footprint Compatibility (SMD Package)

The SiT1543 is a replacement to the 32 kHz XTAL in the 2.0 x 1.2 mm (2012) package. Unlike XTAL resonators, SiTime's silicon MEMS oscillators require a power supply (Vdd) and ground (GND) pin. Vdd and GND pins are conveniently placed between the two large XTAL pins. When using the SiTime Solder Pad Layout (SPL), the SiT1543 footprint is compatible with existing 32 kHz XTALs in the 2012 SMD package. Figure 1 shows the comparison between the quartz XTAL footprint and the SiTime footprint.

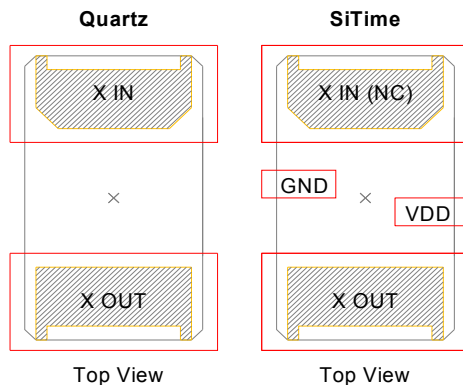


Figure 1. SiT1543 Footprint Compatibility with Quartz XTAL Footprint ⁽⁵⁾

Frequency Stability

The SiT1543 is factory calibrated (trimmed) to guarantee frequency stability to be less than 20 PPM at room temperature and less than 100 PPM over the full -40°C to +85°C temperature range. Unlike quartz crystals that have a classic tuning fork parabola temperature curve with a 25°C turnover point, the SiT1543 temperature coefficient is extremely flat across temperature. The devices maintain less than 100 PPM frequency stability over the full operating temperature range.

Power Supply Noise Immunity

The SiT1543 is an ultra-small 32 kHz oscillator. In addition to eliminating external output load capacitors common with standard XTALs, this device includes special power supply filtering and thus, eliminates the need for an external Vdd bypass-decoupling capacitor. This feature further simplifies the design and keeps the footprint as small as possible. Internal power supply filtering is designed to reject noise up to ±50 mVpp magnitude 5 MHz frequency.

Output Voltage

For low-power applications that drive directly into a chip-set's XTAL input, the reduced swing output is ideal. SiTime's unique NanoDrive[™], factory-programmable output stage is optimized for low voltage swing to minimize power and maintain compatibility with the downstream oscillator input (X IN pin). The SiT1543 output swing is customer specific and factory programmed between 250 mV and 800 mV. For DC-coupled applications, output V_{OH} and V_{OL} are individually factory programmed to the customers' requirement. V_{OH} programming range is between 500 mV and 1.2V in 100 mV increments. Similarly, V_{OL} programming range is between 250 mV and 800 mV. Contact SiTime for programming support.

Note:

5. On the SiTime device, X IN is not internally connected and will not respond to any signal. It is acceptable to connect to chipset X OUT.

Calculating Load Current

No Load Supply Current

When calculating no-load power for the SiT1543, the core and output driver components need to be added. Since the output voltage swing can be programmed for reduced swing between 250 mV and 800 mV for ultra-low power applications, the output driver current is variable. Therefore, no-load operating supply current is broken into two sections; core and output driver. The equation is as follows:

$$\text{Supply Current (no load)} = I_{dd} \text{ Core} + (165\text{nA/V})(V_{out_{pp}})$$

Example 1: Full-swing LVCMOS

- Vdd = 3.3V
- Idd Core = 750nA
- Vout_{pp} = 2.1V (max output of device)

$$\text{Supply Current} = 750\text{nA} + (165\text{nA/V})(2.1\text{V}) = 1047\text{nA}$$

Example 2: NanoDrive™ Reduced Swing

- Vdd = 3.3V
- Idd Core = 750nA
- Vout_{pp} (Programmable) = V_{OH} - V_{OL} = 1.1V - 0.6V = 0.5V

$$\text{Supply Current} = 750\text{nA} + (165\text{nA/V})(0.5\text{V}) = 832\text{nA}$$

Total Supply Current with Load

To calculate the total supply current, including the load, follow the equation listed below. Note the greater than 40% reduction in power with NanoDrive™.

$$\text{* Total Current} = I_{dd} \text{ Core} + I_{dd} \text{ Output Driver} \\ (165\text{nA/V} \cdot V_{out_{pp}}) + \text{Load Current} (C \cdot V \cdot F)$$

Example 1: Full-swing LVCMOS

- Vdd = 3.3V
- Vout_{pp} = 2.1V (max output of device)
- Idd Core = 750nA
- Load Capacitance = 10pF
- Idd Output Driver: (165nA/V)(2.1V) = 347nA
- Load Current: (10pF)(2.1V)(32.768kHz) = 688nA

$$\text{Total Current} = 750\text{nA} + 347\text{nA} + 688\text{nA} = 1785\text{nA}$$

Example 2: NanoDrive™ Reduced Swing

- Vdd = 3.3V
- Idd Core = 750nA
- Load Capacitance = 10pF
- Vout_{pp} (Programmable): V_{OH} - V_{OL} = 1.1V - 0.6V = 0.5V
- Idd Output Driver: (165nA/V)(0.5V) = 83nA
- Load Current: (10pF)(0.5V)(32.768kHz) = 164nA

$$\text{Total Current} = 750\text{nA} + 83\text{nA} + 164\text{nA} = 997\text{nA}$$

SiT1543

Ultra-Low Power 32.768 kHz XTAL SMD Replacement for Single-Cell Li+ Unregulated Battery Powered Applications



The Smart Timing Choice™

Dimensions and Patterns

Package Size – Dimensions (Unit: mm)	Recommended Land Pattern (Unit: mm)
<p>2.0 x 1.2 mm SMD</p> <p>Top view dimensions: 2.0±0.05 mm (width), 1.20±0.05 mm (height). Markers #1, #2, #3, #4 are shown.</p> <p>Side view dimensions: 1.0 mm (height), 0.30 mm (lead width), 0.20 mm (lead thickness), 1.30 mm (total length), 0.65 mm (lead length), 0.40 mm (lead thickness).</p> <p>Detail view: R0.1 radius, 0.55±0.05 mm (width).</p>	<p>SiTime Only SPL</p> <p>Dimensions: 0.4 (2x) mm (lead width), 0.6 mm (lead length), 0.2 (2x) mm (lead thickness), 1.4 (2x) mm (total length), 0.5 (2x) mm (lead thickness), 0.4 mm (lead thickness), 0.6 mm (lead length), 1.2 mm (total length), 2.0 mm (total length).</p> <p>XTAL Compatible SPL</p> <p>Dimensions: 0.7 (2x) mm (lead width), 0.4 mm (lead length), 0.2 (2x) mm (lead thickness), 1.4 (2x) mm (total length), 0.5 (2x) mm (lead thickness), 0.4 mm (lead thickness), 0.8 mm (lead length), 2.2 mm (total length).</p>

SiT1543


Ultra-Low Power 32.768 kHz XTAL SMD Replacement for Single-Cell Li+ Unregulated Battery Powered Applications



The Smart Timing Choice™

Ordering Information

Part number characters in blue represent the customer specific options. The other characters in the part number are fixed.

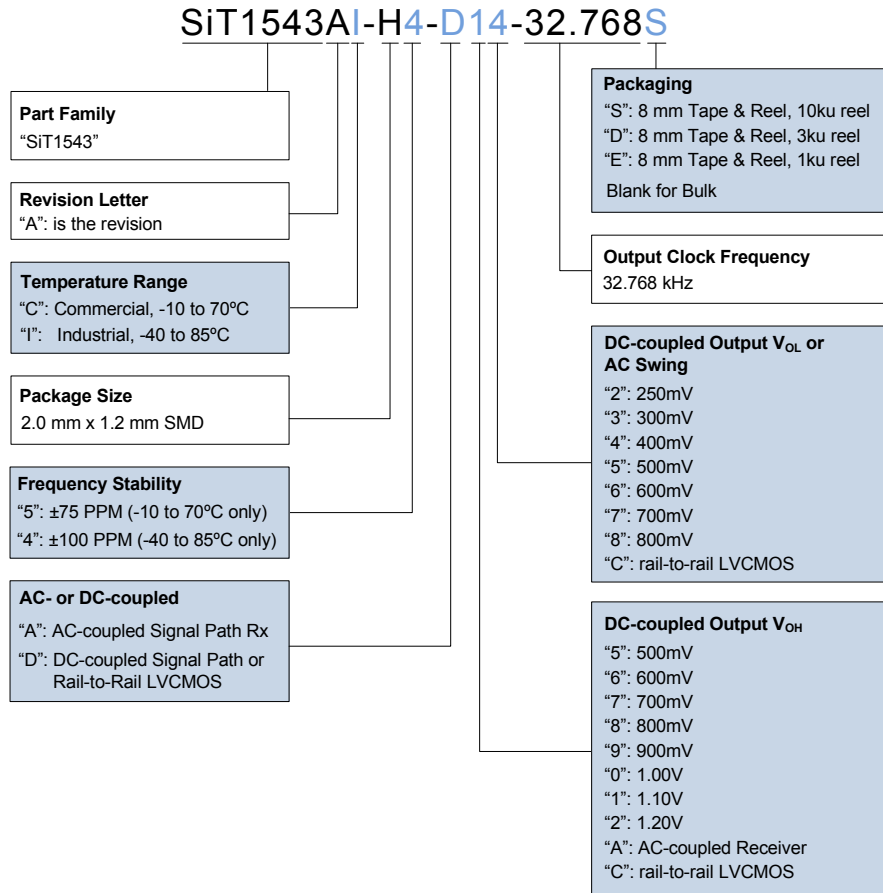

The following examples illustrate how to select the appropriate temp range and output voltage requirements:

Example 1: SiT1543AI-H4-D14-32.768

- Industrial temp & corresponding 100 PPM frequency stability. Note, 100 PPM is only available for the industrial temp range, and 75 PPM is only available for the commercial temp range.
- Output swing requirements:
 - a) "D" = DC-coupled receiver
 - b) "1" = V_{OH} = 1.1V
 - c) "4" = V_{OL} = 0.4V

Example 2: SiT1543AC-H5-AA5-32.768

- Commercial temp & corresponding 75 PPM frequency stability. Note, 100 PPM is only available for the industrial temp range, and 75 PPM is only available for the commercial temp range.
- Output swing requirements:
 - a) "A" = AC-coupled receiver
 - b) "A" = AC-coupled receiver
 - c) "5" = 500mV swing

SiT1543

Ultra-Low Power 32.768 kHz XTAL SMD Replacement for
Single-Cell Li+ Unregulated Battery Powered Applications



The Smart Timing Choice™

© SiTime Corporation 2013. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.