



ADAPTER CARDS

ConnectX® EN

Dual-Port 10 Gigabit Ethernet Mezzanine NIC for HP BladeSystem c-Class

ConnectX EN Ethernet Network Interface Card (NIC) for HP BladeSystem c-Class delivers high-bandwidth and industry-leading 10GigE connectivity with stateless offloads for converged fabrics in Enterprise Data Center and High-Performance Computing environments. Clustered databases, web infrastructure, and IP video servers are just a few example applications that will achieve significant throughput and latency improvements resulting in faster access, real time response and increased number of users per server. ConnectX EN improves network performance by increasing available bandwidth to the CPU and providing enhanced performance, especially in virtualized server environments.

Optimal Price/Performance

ConnectX EN removes I/O bottlenecks in mainstream servers that are limiting application performance. Hardware-based stateless offload engines handle the TCP/UDP/IP segmentation, reassembly, and checksum calculations that would otherwise burden the host process. These offload technologies are fully compatible with Microsoft RSS and NetDMA. Total cost of ownership is optimized by maintaining an end-to-end Ethernet network on existing operating systems and applications.

I/O Virtualization


ConnectX support for hardware-based I/O virtualization provides dedicated adapter resources and guaranteed isolation and protection for virtual machines (VM) within the server. I/O virtualization with ConnectX gives data center managers better server utilization and LAN and SAN unification while reducing cost, power, and cable complexity.

Quality of Service

Resource allocation per application or per VM is provided by the advanced QoS supported by ConnectX EN. Service levels for multiple traffic types can be based on IETF DiffServ or IEEE 802.1p/Q allowing system administrators to prioritize traffic by application, virtual machine, or protocol. This powerful combination of QoS and prioritization provides the ultimate fine-grain control of traffic – ensuring that applications run smoothly in today's complex environment.

Software Support

ConnectX EN is supported by a full suite of software drivers for Microsoft Windows, Linux distributions, VMware and Citrix XENServer. ConnectX EN supports stateless offload and is fully interoperable with standard TCP/UDP/IP stacks. Stateless offload connections are also easy to scale using multiple adapters to reach the desired level of performance and fault tolerance. ConnectX EN supports various management interfaces and has a rich set of configuring and management tools across operating systems.

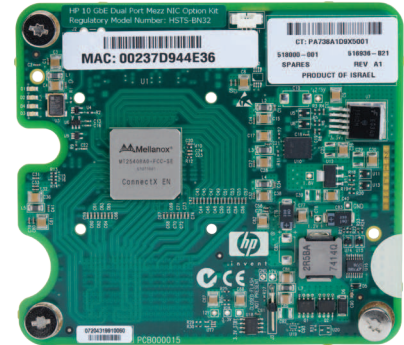

BENEFITS

- 10Gb/s full duplex bandwidth
- Industry-leading throughput and latency performance
- I/O consolidation
- Virtualization acceleration
- High-performance networking and storage access
- Software compatible with standard TCP/UDP/IP and iSCSI stacks

KEY FEATURES

- Dual 10 Gigabit Ethernet ports
- PCI Express 2.0
- Traffic steering across multiple cores
- TCP/UDP/IP stateless offload in hardware
- Intelligent interrupt coalescence
- Hardware-based I/O virtualization
- Advanced Quality of Service

FEATURE SUMMARY

ETHERNET

- IEEE Std 802.3ae 10 Gigabit Ethernet
- IEEE Std 802.3ad Link Aggregation and Failover
- IEEE Std 802.3x Pause
- IEEE Std 802.1Q VLAN tags
- IEEE Std 802.1p Priorities
- Multicast
- Jumbo frame support (10KB)
- 128 MAC/VLAN addresses per port

TCP/UDP/IP STATELESS OFFLOAD

- TCP/UDP/IP checksum offload
- TCP Large Send (< 64KB) or Giant Send (64KB-16MB) Offload for segmentation
- Receive Side Scaling (RSS) up to 32 queues
- Line rate packet filtering

ADDITIONAL CPU OFFLOADS

- Traffic steering across multiple cores
- Intelligent interrupt coalescence
- Full support for Intel I/OAT
- Compliant to Microsoft RSS and NetDMA

HARDWARE-BASED I/O VIRTUALIZATION

- Address translation and protection
- Multiple queues per virtual machine
- VMware NetQueue support
- PCISIG IOV compliant

COMPATIBILITY

CPU

- AMD X86, X86_64
- Intel X86, EM64T, IA-32, IA-64

PCI EXPRESS INTERFACE

- PCIe Base 2.0 compliant, 1.1 compatible
- 2.5GT/s link rate x8 (20+20Gb/s bidirectional bandwidth)
- HP BladeSystem c-Class blade servers
- Support for MSI/MSI-X mechanisms

OPERATING SYSTEMS/DISTRIBUTIONS

- Novell SuSE Linux Enterprise Server (SLES), Red Hat Enterprise Linux (RHEL), and other Linux distributions
- Microsoft Windows Server 2007/2008/CCS
- VMware ESX 3.5
- Citrix XENServer 4.1

MANAGEMENT

- MIB, MIB-II, MIB-II Extensions, RMON, RMON 2
- Configuration and diagnostic tools

COMPLIANCE

SAFETY

- US/Canada: cTUVus
- EU: IEC60950
- International: CB

EMC (EMISSIONS)

- USA: FCC, Class A
- Canada: ICES, Class A
- EU: CE Mark (EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3)
- Japan: VCCI, Class A
- Korea: MIC Class A
- Australia/New Zealand: C-Tick Class A

ENVIRONMENTAL

- EU: IEC 60068-2-64: Random Vibration
- EU: IEC 60068-2-29: Shocks, Type I / II
- EU: IEC 60068-2-32: Fall Test

OPERATING CONDITIONS

- Operating temperature: 0 to 55° C
- Air flow: 200LFM @ 55° C
- Requires 3.3V, 12V supplies

SPECIFICATIONS

- Dual 4X 10GigE ports
- PCI Express 2.0 x8 (1.1 compatible)
- Single chip architecture
- Mezzanine form factor
- RoHS-R5 compliant
- 12-month warranty

Visit <http://www.hp.com> for more information.

Mezzanine Cards

Ordering Part Number	Ethernet Ports	Host Bus	Power (Typ)
516936-B21	Dual XAUI	PCIe 2.0 2.5GT/s	9.3W



350 Oakmead Pkwy, Suite 100, Sunnyvale, CA 94085
 Tel: 408-970-3400 • Fax: 408-970-3403
www.mellanox.com

© Copyright 2009, Mellanox Technologies. All rights reserved.
 Mellanox, ConnectX, InfiniBlast, InfiniBridge, InfiniHost, InfiniRISC, InfiniScale, and InfiniPCI are registered trademarks of Mellanox Technologies, Ltd. BridgeX, FabricIT, PhyX, and Virtual Protocol Interconnect are trademarks of Mellanox Technologies, Ltd. All other trademarks are property of their respective owners.