



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

General Purpose Rectifier

2200 Amperes Average
 1600 Volts

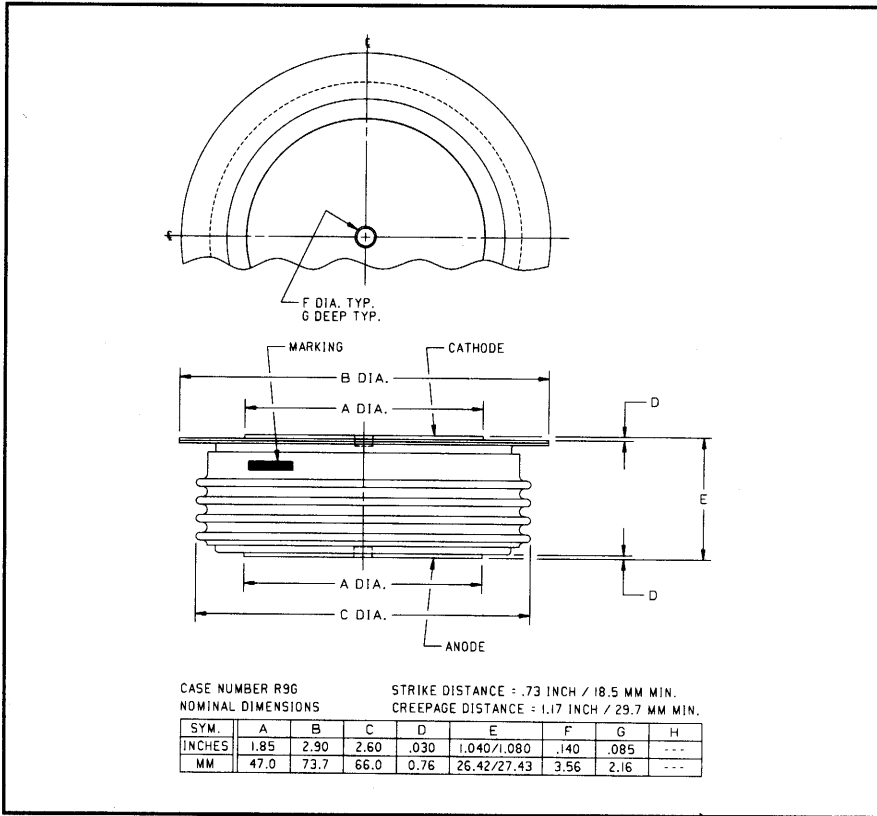

R9G0 2200A (Outline Drawing)

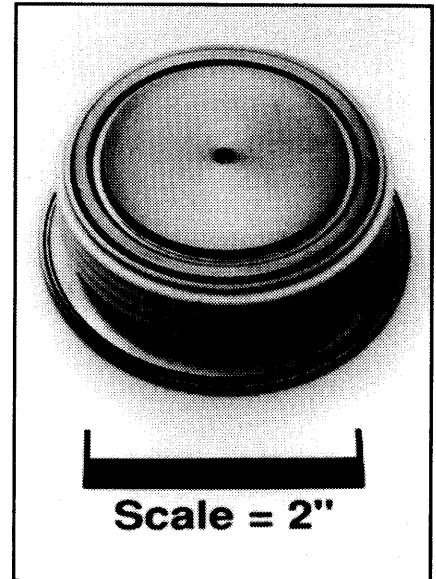

R9G0 1800A General Purpose Rectifier
 2200 Amperes Average, 1600 Volts

Description:

Powerex General Purpose Rectifiers are designed for high blocking voltage capability with low forward voltage to minimize conduction losses. These hermetic Pow-R-Disc devices can be mounted using commercially available clamps and heatsinks.

Features:

- Low Forward Voltage
- Low Thermal Impedance
- Hermetic Packaging
- Excellent Surge and I^2t Ratings

Applications:

- Power Supplies
- Motor Control
- Free Wheeling Diode
- Battery Chargers
- Resistance Welding

Ordering Information:

Select the complete 8 digit part number you desire from the table below.

| Type | Voltage | Current | Typical Recovery Time |
|------|---|------------------|--------------------------|
| | V_{RRM} (Volts) | $I_T(av)$ (A) | t_{rr} (μ sec) |
| R9G0 | 01 through 16 100V through 1600V | 22 2200A | XX 15 μ sec |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

R9G0 2200A
General Purpose Rectifier
2200 Amperes Average, 1600 Volts

Absolute Maximum Ratings

| Characteristics | Symbol | R9G0 2200A | Units |
|--|--------------|------------------|----------|
| Non-repetitive Transient Peak Reverse Voltage | V_{RSM} | $V_{RRM} + 200V$ | Volts |
| RMS Forward Current, $T_C = 134^\circ C$ | $I_{F(rms)}$ | 3455 | Amperes |
| Average Current 180° Sine Wave, $T_C = 134^\circ C$ | $I_{F(av)}$ | 2200 | Amperes |
| RMS Forward Current, $T_C = 55^\circ C$ | $I_{F(rms)}$ | 5340 | Amperes |
| Average Current 180° Sine Wave, $T_C = 55^\circ C$ | $I_{F(av)}$ | 3400 | Amperes |
| Peak One Cycle Surge Forward Current (Non-repetitive) 60Hz | I_{fsm} | 30000 | Amperes |
| Peak One Cycle Surge Forward Current (Non-repetitive) 50Hz | I_{fsm} | 27400 | Amperes |
| 3 Cycle Surge Current | I_{fsm} | 22000 | Amperes |
| 10 Cycle Surge Current | I_{fsm} | 18500 | Amperes |
| i^2t (for Fusing) for One Cycle, 60Hz | i^2t | 3,700,000 | A^2sec |
| Maximum i^2t of Package ($t = 8.3$ msec) | i^2t | 90×10^6 | A^2sec |
| Operating Temperature | T_j | -40 to +150°C | °C |
| Storage Temperature | T_{stg} | -40 to +190°C | °C |
| Approximate Weight | | 1 | lb. |
| | | 454 | g |
| Mounting Force | | 5000 to 6000 | lb. |
| | | 2270 to 2700 | kg. |

R9G0 2200A
General Purpose Rectifier
 2200 Amperes Average, 1600 Volts

Electrical Characteristics, $T_j = 25^\circ\text{C}$ Unless Otherwise Specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|-----------------------------------|-------------|---|------|------|---------|---|
| Peak Reverse Leakage Current | I_{RRM} | $T_j = 125^\circ\text{C}$, $V_R = V_{RRM}$ | | | 150 | mA |
| Forward Voltage Drop | V_{FM} | $I_{FM} = 1500\text{A}$, Duty Cycle < 0.1% | | | 1.10 | Volts |
| Threshold Voltage, Low-level | $V_{(TO)1}$ | $T_j = 150^\circ\text{C}$, $I = 15\%$, $I_{T(av)}$ to $\pi I_{T(av)}$ | | | 0.79109 | Volts |
| Slope Resistance, Low-level | r_{T1} | | | | 0.08773 | $\text{m}\Omega$ |
| Threshold Voltage, High-level | $V_{(TO)2}$ | $T_j = 150^\circ\text{C}$, $I = \pi I_{T(av)}$ to I_{TSM} | | | 0.73267 | Volts |
| Slope Resistance, High-level | r_{T2} | | | | 0.09978 | $\text{m}\Omega$ |
| V_{TM} Coefficients, Low-level | | $T_j = 150^\circ\text{C}$, $I = 15\% I_{T(av)}$ to $\pi I_{T(av)}$ | | | | $A_1 = 0.87442$ $B_1 = -0.02263$ $C_1 = 6.427\text{E-}05$ $D_1 = 3.061\text{E-}03$ |
| V_{TM} Coefficients, High-level | | $T_j = 150^\circ\text{C}$, $I = \pi I_{T(av)}$ to I_{TSM} | | | | $A_2 = 6.40712$ $B_2 = -0.87093$ $C_2 = 4.383\text{E-}05$ $D_2 = 0.02888$ |
| Typical Reverse Recovery Time | t_{rr} | $T_C = 25^\circ\text{C}$, $I_{FM} = 1500\text{A}$, $di_R/dt = 25\text{A}/\mu\text{sec}$, $t_p = 190\mu\text{sec}$ | | 15 | | μsec |

Thermal Characteristics


Maximum Thermal Resistance, Double Sided Cooling

| | | | |
|------------------|-------------------|--------|---------------------------|
| Junction-to-Case | $R_{\theta(j-c)}$ | 0.020 | $^\circ\text{C}/\text{W}$ |
| Case-to-Sink | $R_{\theta(c-s)}$ | 0.0075 | $^\circ\text{C}/\text{W}$ |


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272
 Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

R9G0 2200A
General Purpose Rectifier
 2200 Amperes Average, 1600 Volts


Maximum On-State Forward Voltage Drop
 ($T_J = 190^\circ\text{C}$)

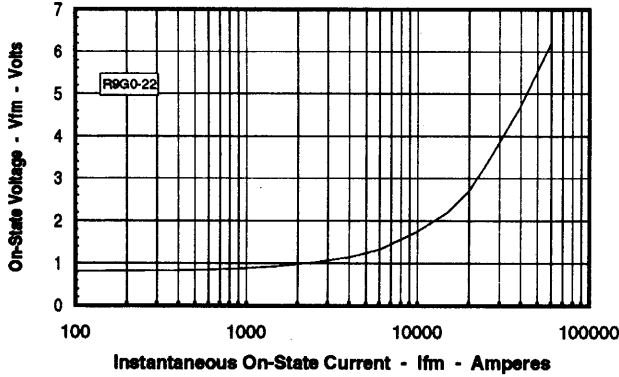


Maximum Transient Thermal Impedance
 (Junction to Case)

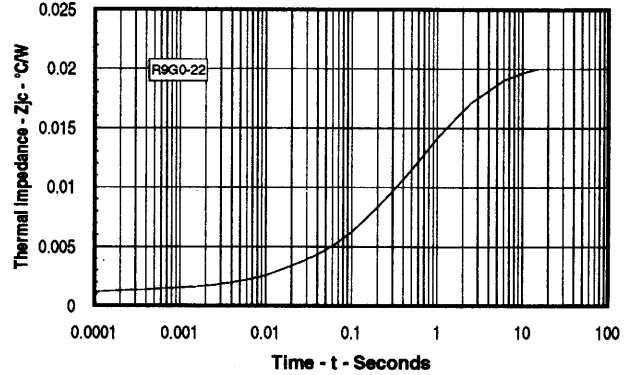


Maximum On-State Power Dissipation
 (Sinusoidal Waveform)

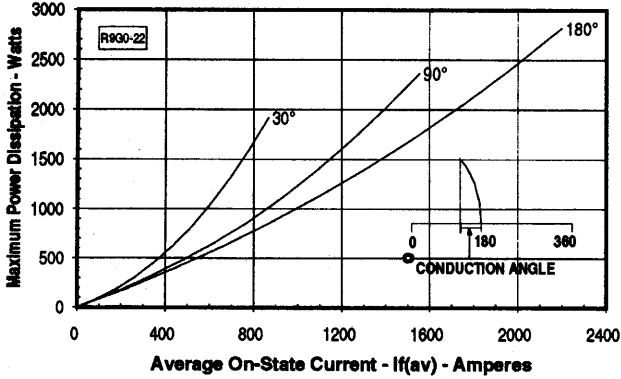

Maximum Allowable Case Temperature
 (Sinusoidal Waveform)

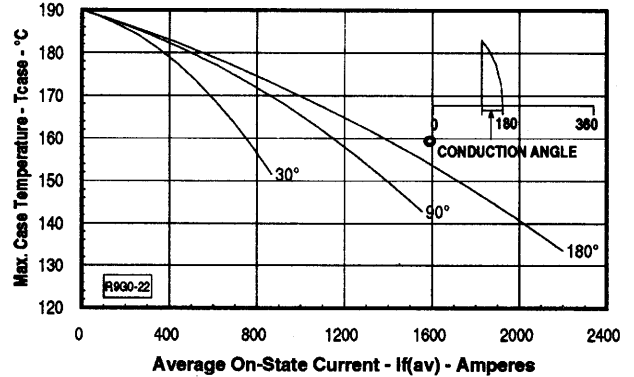

Maximum On-State Power Dissipation
 (Rectangular Waveform)

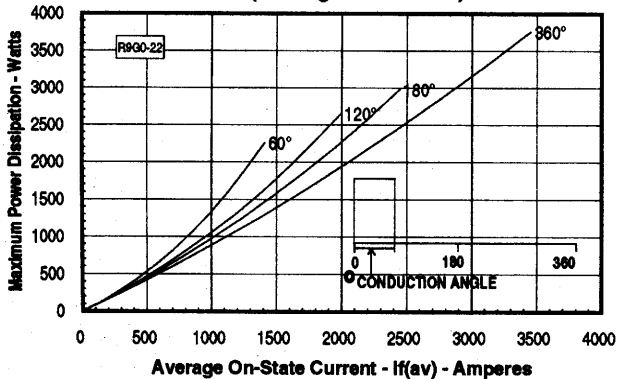

Maximum Allowable Case Temperature
 (Rectangular Waveform)

