

# ULL Series Red Laser Line Module

Part No: ULL5-0.4G-635-\*\*




## Product Features

- High Stability and low noise
- Collimated or Adjustable focus beam
- Reverse Polarity Protection
- Custom Options Available

## Application

- Measurement
- Bioanalytical
- Automation
- Alignment

## Mechanical Drawing

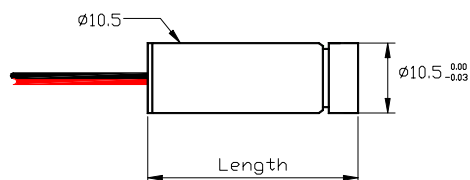

## Specification

| OPTICAL                             |                    |
|-------------------------------------|--------------------|
| Wavelength                          | 635 nm             |
| Optical Output Power                | <0.4 mW            |
| Stability                           | <1%                |
| Wavelength Drift                    | 0.2nm/°C           |
| Noise (20MHz Bandwidth)             | <0.5% RMS          |
| Laser Operation                     | Continuous         |
| Laser Structure                     | Single Mode Laser  |
| Line Thickness                      | Adjustable         |
| Minimum Line Thickness              | <1mm up to 1 meter |
| Bore sight Accuracy                 | <2.5mm/m           |
| Pointing Stability                  | <50μrad            |
| ELECTRICAL                          |                    |
| Operating Voltage <sup>1</sup>      | 3 to 5 VDC         |
| Operating Current                   | <60 mA             |
| Control Circuit                     | Auto Power Control |
| Electrical Connections              | +Red, -Black       |
| MECHANICAL                          |                    |
| Dimension                           | See chart          |
| Cable                               | 380mm              |
| Operating Temperature               | -10°C to +50°C     |
| Storage Temperature                 | -40°C to +80°C     |
| Heat Sink Requirements <sup>2</sup> | Recommended        |

### Notes

1. Higher operating voltage version (9 to 12V) is available, the part No. will be: ULL12-0.4G-635-\*\*.

2. Heat Sink: The ULL Series Red Laser Line Module is designed to operate without heat sink. Do not restrict air circulation around the device; an additional heat sink can be used to maximize the performance and life time of the laser.

**Caution:** The case is internally connected to the circuit; damage to the anodized surface may result in failure of the laser module.



Complies with CDRH 21CFR 1040.10

**Operational Hazard-Semiconductor Laser Diode Module:** This laser module emits radiation that is visible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage.

**Limited Warranty:** One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.


## World Star Tech.

321 Lesmill Rd. Toronto, Ont. M3B 2V1 Canada  
Tel: (416) 363-3332 Fax: (416) 363-3112 www.worldstartech.com

Rev. B Oct.2004


# ULL Series Red Laser Line Module

## Focus Adjustment of Line Generators

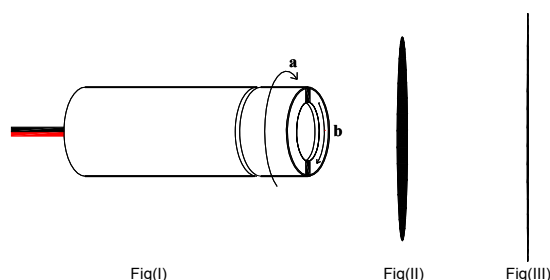

The line generator lens assembly consists of: aspherical lens assembly *a* and cylindrical lens assembly *b*. Lens assembly *a* adjusts the coarse thickness of the line and lens assembly *b* adjusts the fine thickness of the line. To focus the line at a given distance rotate lens assembly *a*, until you get the thinnest possible line. Your line at this point may look the line in Fig (II), thick in the center and thin along the edges. To adjust to a thin line focused line (Fig (III)), keep lens assembly *a* fixed and gently rotate lens assembly *b* (<90°) (making sure not to move lens assembly *a* during this process) until you get a thin uniform line as shown in Fig (III).

## Fan Angle Selection Guide

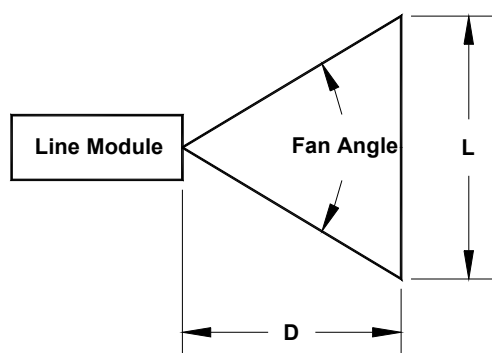

L: Line Length  
D: Distance  
a: Factor

For given Fan Angle, the Line Length *L* at distance *D* is calculated using the equation :

$$L = a \times D$$

For Example: using 4 ° Fan Angle at distance of 1.5m, the Line Length will be  $L = 0.07 \times 1.5\text{m} = 0.105\text{m}$ ;

| Part No.         | Fan angle | Factor a | Line Length(m) |      |      | Laser Class | Dimension<br>(Diameter × Length) |
|------------------|-----------|----------|----------------|------|------|-------------|----------------------------------|
|                  |           |          | D=0.5m         | D=1m | D=3m |             |                                  |
| ULL5-0.4G-635-04 | 4 °       | 0.07     | 0.04           | 0.07 | 0.21 | I           | 10.5mm × 30mm                    |
| ULL5-0.4G-635-15 | 15°       | 0.26     | 0.13           | 0.26 | 0.78 | I           | 10.5mm × 30mm                    |
| ULL5-0.4G-635-30 | 30 °      | 0.54     | 0.27           | 0.54 | 1.62 | I           | 10.5mm × 30mm                    |
| ULL5-0.4G-635-45 | 45°       | 0.83     | 0.42           | 0.83 | 2.49 | I           | 10.5mm × 30mm                    |
| ULL5-0.4G-635-60 | 60 °      | 1.15     | 0.58           | 1.15 | 3.45 | I           | 10.5mm × 30mm                    |
| ULL5-0.4G-635-75 | 75 °      | 1.53     | 0.77           | 1.53 | 4.59 | I           | 10.5mm × 30mm                    |
| ULL5-0.4G-635-90 | 90°       | 2.00     | 1.00           | 2.00 | 6.00 | I           | 10.5mm × 35mm                    |