

## AC-4/32T8UVIS

Type: Instant Start Electronic Ballast

Lamp Connection: Parallel

Lamp Types:

Three or Four F32T8, F25T8, F17T8

SLI lamps or cross reference Philips, GE and Sylvania/OSRAM lamps




### SPECIFICATIONS

Input Voltage	Number of Lamps	Lamp Type	Lamp Watts	Input Watts (typical)	Input Current (typical)	Power Factor	Max THD	Crest Factor	Ballast Factor
120V	3	F32T8	32W	93W	0.74A	0.98	<10%	<1.7	1.04
277V	3	F32T8	32W	91W	0.33A	0.95	<10%	<1.7	1.04
120V	4	F32T8	32W	113W	0.99A	0.98	<10%	<1.7	0.88
277V	4	F32T8	32W	110W	0.42A	0.95	<10%	<1.7	0.88
120V	3	F17T8	17W	52W	0.42A	0.98	<10%	<1.7	1.03
277V	3	F17T8	17W	52W	0.20A	0.95	<10%	<1.7	1.05
120V	4	F17T8	17W	62W	0.56A	0.98	<10%	<1.7	0.88
277V	4	F17T8	17W	62W	0.25A	0.95	<10%	<1.7	0.88
120V	3	F25T8	25W	71W	0.60A	0.98	<10%	<1.7	1.06
277V	3	F25T8	25W	70W	0.26A	0.95	<10%	<1.7	1.07
120V	4	F25T8	25W	85W	0.78A	0.98	<10%	<1.7	0.92
277V	4	F25T8	25W	82W	0.33A	0.95	<10%	<1.7	0.92



### SAFETY & PERFORMANCE

- 120-277V, 50/60Hz Input Voltage
- UL Listed
- cUL Listed
- High Power Factor
- Type 1 Outdoor
- Sound Rated A
- Surge Protected
- Class P Thermally Protected (Inherent)
- Auto Restart
- FCC Class A
- No PCBs

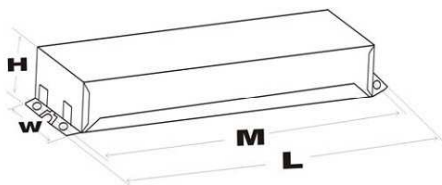

### APPLICATION

- Minimum Starting Temp 0°F
- Maximum Allowed Operation Ambient Temp 120°F
- Remote Wiring Length up to 18 ft

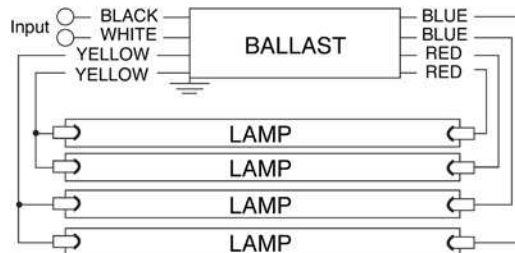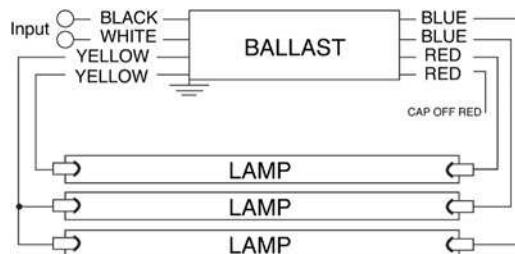

### Dimensions

Length (L)	9.50"
Width (W)	1.70"
Height (H)	1.20"
Mounting (M)	8.90"
Hole Diameter	0.31"
Weight	1.57 lbs.
Case Qty.	20 pcs.

### Wire Lengths

Black	16"
White	16"
Red (2)	24"
Blue (2)	24"
Yellow (2)	36"

### INSTALLATION

- Install in accordance with the National Electrical Code
- Use with 600V rated wire
- Use external ground wire
- Do not connect any lamp lead to neutral
- Mounting side of ballast package must be in complete contact with metallic fixture surface for proper thermal dissipation



### WARRANTY

AC Electronics warrants to the purchaser that each electronic ballast will be free from defects in material or workmanship for a period of 3 years from the date of manufacture when properly installed and under normal conditions of use.

Administration & Distribution Center: 3401 Avenue D, Arlington, TX 76011  
1-800-375-6355 • www.ace-ballast.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

