



**Switch-Hitter™**

**Model Number**

**AC-40CDI.67AQCZ**

Type: Constant Current LED Driver

Input Voltage: 120-277V


Input Frequency: 50/60Hz

**MULTI-CURRENT SWITCHING AND DIMMING**


**ELECTRICAL SPECIFICATIONS:**

Output Power Max.	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	Efficiency Up To	Dimming Protocol	Dimming Range
40W	48W	0.4A @ 120V 0.18A @ 277V	>0.95	<20%	15-24V	1670mA±5%	90° C	-40° C	84%	0 to 10V	10 to 100%
36W	43W	0.36A @ 120V 0.16A @ 277V	>0.95	<20%	15-24V	1500mA±5%	90° C	-40° C	84%	0 to 10V	10 to 100%
31W	37W	0.31A @ 120V 0.14A @ 277V	>0.95	<20%	15-24V	1300mA±5%	90° C	-40° C	84%	0 to 10V	10 to 100%
24W	29W	0.24A @ 120V 0.1A @ 277V	>0.95	<20%	15-24V	1000mA±5%	90° C	-40° C	84%	0 to 10V	10 to 100%

**WIRING:**

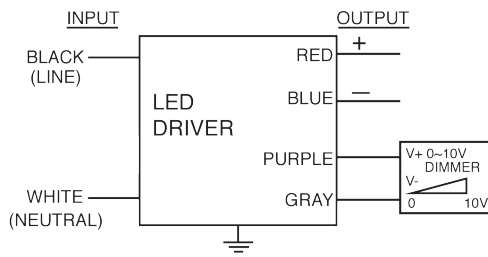

**PHYSICAL:**

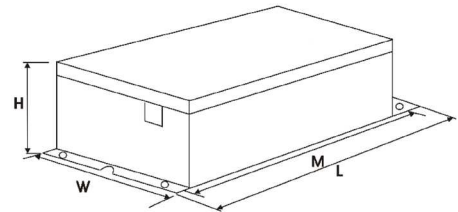

Lead Lengths					
Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

Dimensions			
Length	6.5"	Mounting Length	5.9"
Width	2.9"	Weight	1 lb.
Height	1.18"	Case Qty.	30 pcs.

**SAFETY & PERFORMANCE:**

- UL and cUL Recognized Class 2
- UL Outdoor Type I
- Class A sound rating
- Silicon Potted
- Thermal Switch
- No PCBs
- IP66
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C\*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

**INSTALLATION:**

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required to use in installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



\*A.C.E. warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See www.aceleds.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.