



Dual 1 Form A  
Solid State Relay



## DESCRIPTION

The AD4C311-L is a bi-directional, double-pole, single-throw, normally open solid-state relay. The combination of high load voltage, low on-resistance, and current limit protection make the AD4C311-L a unique device.

The AD4C311-L combines two optically isolated, discrete, current limit protected SSRs in one compact 8 pin DIP/SMD package. Each SSR is composed of an IR LED, optically coupled to an IC, which in turn drives back-to-back MOSFETs on the output. The IC provides current limit protection. During transient current spikes, this circuitry limits the current on the output of the device, thereby offering an additional measure of protection to itself and downstream components.

## FEATURES

- Current limit protection
- Low input control power consumption
- 200mA maximum continuous load current
- 15 ohms maximum on-resistance
- Long life/high reliability
- RoHS Compliant / Pb-Free / REACH Compliant

## APPLICATIONS

- Multiplexers
- Meter reading systems
- Data Acquisition
- Medical equipment
- Battery monitoring
- Home/Safety security systems

## OPTIONS/SUFFIXES\*

- -S Surface Mount Leadform Option (50 pcs / tube)
- -TR Tape and Reel Packing Option (1,000 pcs / reel)


NOTE: Suffixes listed above are not included in marking on device for part number identification.

## ABSOLUTE MAXIMUM RATINGS\*

PARAMETER	UNIT	MIN	TYP	MAX
Storage Temperature	°C	-55		125
Operating Temperature	°C	-40		85
Continuous Input Current	mA			40
Transient Input Current	mA			400
Reverse Input Control Voltage	V	6		
Output Power Dissipation	mW			800

\*The values indicated are absolute stress ratings. Functional operation of the device is not implied at these or any conditions in excess of those defined in electrical characteristics section of this document. Exposure to Absolute Ratings may cause permanent damage to the device and may adversely affect reliability.

## SCHEMATIC DIAGRAM

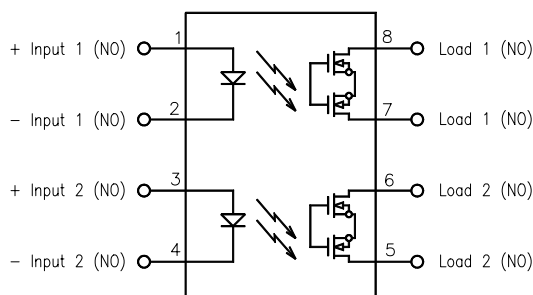







## APPROVALS

- UL / C-UL Approved: File # E90096
- CSA Approved: File #LR111581-1

## ELECTRICAL CHARACTERISTICS - 25°C


PARAMETER	UNIT	MIN	TYP	MAX	TEST CONDITIONS
<b>INPUT SPECIFICATIONS</b>					
LED Forward Voltage	V		1.2	1.5	If = 10mA
LED Reverse Voltage	V	6	12		Ir = 10uA
Turn-On Current	m A		2.5	5	Io = 200mA
Turn-Off Current	m A		0.5		
<b>OUTPUT SPECIFICATIONS</b>					
Blocking Voltage	V	400			Io = 1uA
Continuous Load Current	m A			200	If = 5mA
Current Limit	m A	250	300	330	If = 5mA
On-Resistance	$\Omega$		11	15	Io = 200mA
Leakage Current	$\mu$ A		0.2	1	Vo = 400V
Output Capacitance	p F		25	50	Vo = 25V, f = 1.0MHz
Offset Voltage	m V			0.2	If = 5mA
<b>COUPLED SPECIFICATIONS</b>					
Isolation Voltage	V	3750			T = 1 minute
Turn-On Time	m s		2	5	If = 5mA, Io = 200mA
Turn-Off Time	m s		0.04	1	If = 0mA, Io = 200mA
Isolation Resistance	G $\Omega$	100			
Coupled Capacitance	p F		2		
Contact Transient Ratio	V / $\mu$ s	2000	7000		dV = 50V

## PERFORMANCE DATA

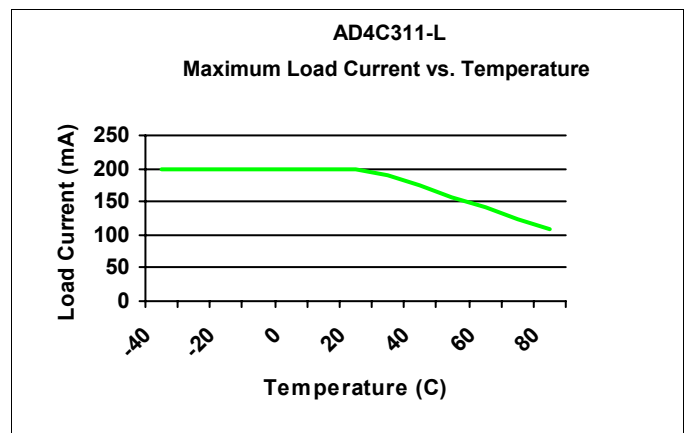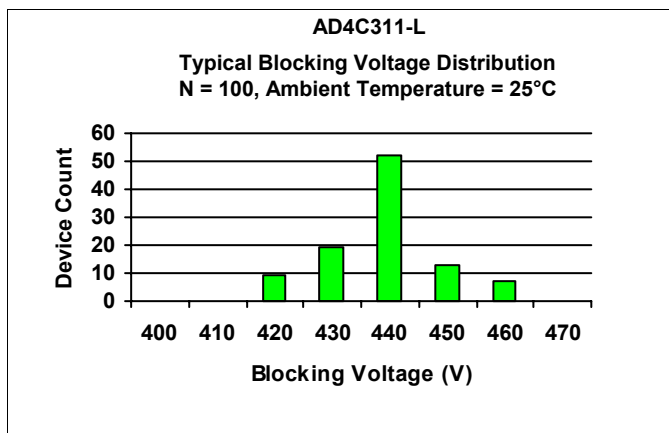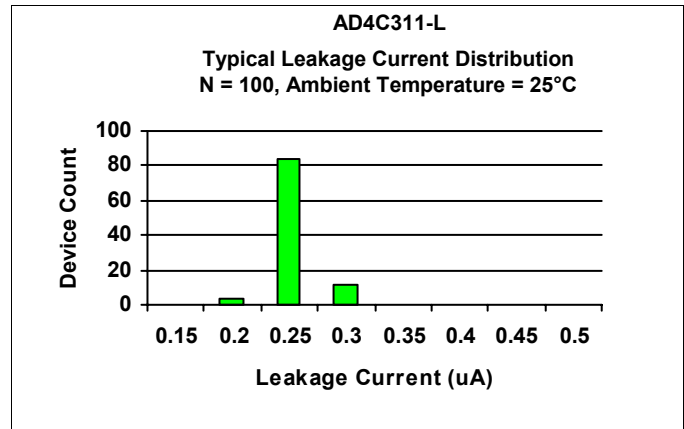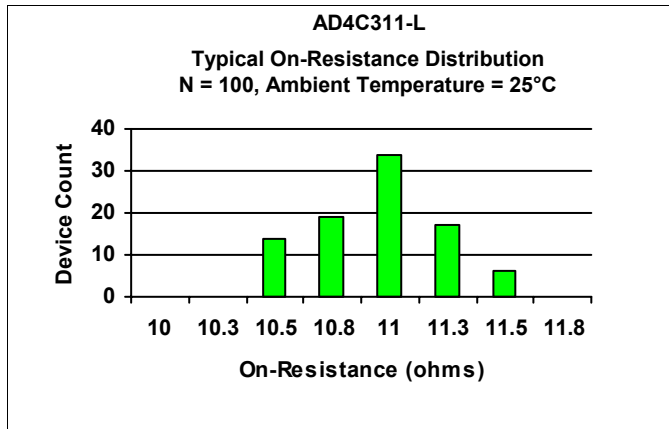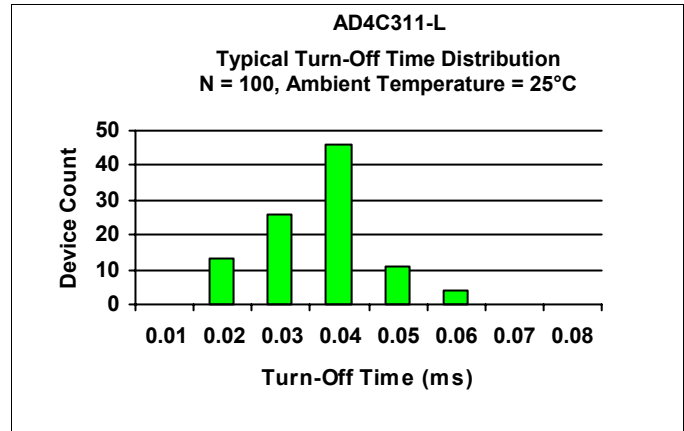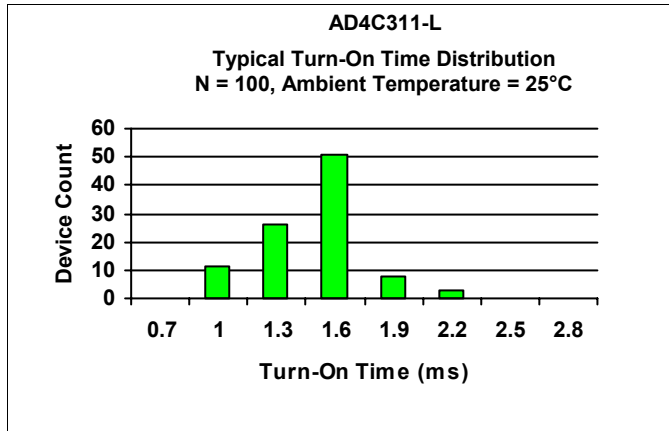


## MECHANICAL DIMENSIONS


### 8 PIN DUAL IN-LINE PACKAGE

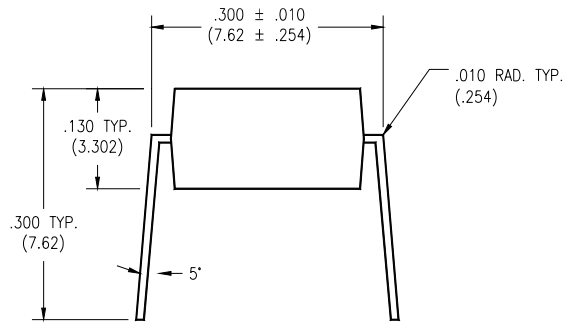

END VIEW

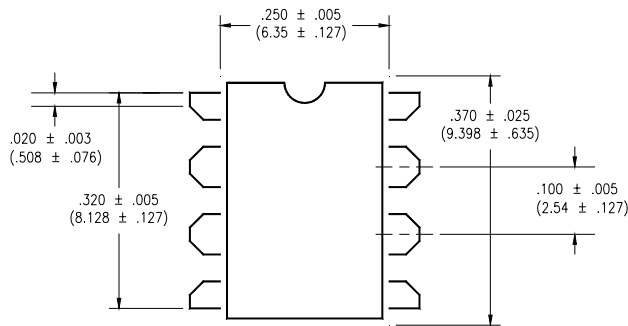


TOP VIEW

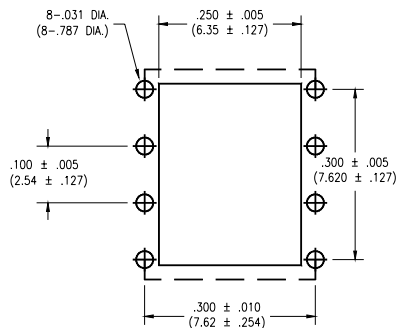


BOTTOM VIEW/  
BOARD PATTERN


### 8 PIN SURFACE MOUNT DEVICE

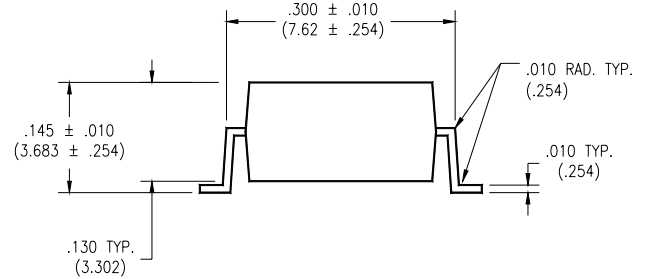

END VIEW

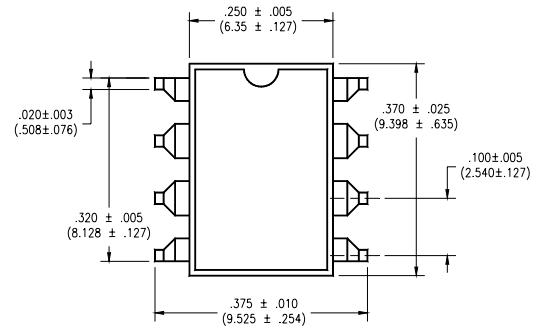

TOP VIEW

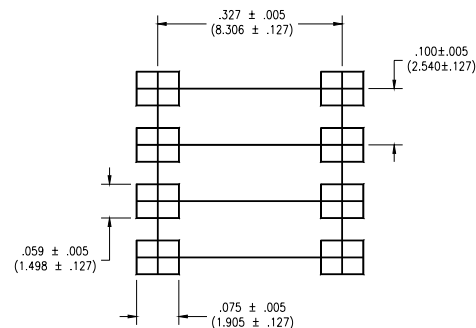

BOTTOM VIEW/  
BOARD PATTERN

## DISCLAIMER

---

*Solid State Optronics (SSO) makes no warranties or representations with regards to the completeness and accuracy of this document. SSO reserves the right to make changes to product description, specifications at any time without further notice. SSO shall not assume any liability arising out of the application or use of any product or circuit described herein. Neither circuit patent licenses nor indemnity are expressed or implied. Except as specified in SSO's Standard Terms & Conditions, SSO disclaims liability for consequential or other damage, and we make no other warranty, expressed or implied, including merchantability and fitness for particular use.*

## LIFE SUPPORT POLICY

---

*SSO does not authorize use of its devices in life support applications wherein failure or malfunction of a device may lead to personal injury or death. Users of SSO devices in life support applications assume all risks of such use and agree to indemnify SSO against any and all damages resulting from such use. Life support devices are defined as devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when used properly in accordance with instructions for use can be reasonably expected to result in significant injury to the user, or (d) a critical component in any component of a life support device or system whose failure can be reasonably expected to cause failure of the life support device or system, or to affect its safety or effectiveness.*