



LTR	REVISION	DATE	APPD
4	042213-JH01: UPDATE TEST DATA	04-23-13	GP


Ledtronics Inc.
SLL004P-9X60W-XPW-005
100-240V/277V
300W 50/60Hz ZZ
 CONFORMS TO UL STD. 1598
 CERTIFIED TO CSA STD. C22.2 No. 250.0-08
 Intertek
 4001379
 SUITABLE FOR WET LOCATIONS.
 MIN 90°C SUPPLY CONDUCTORS.
 CONVIENT AUX EMPLACEMENTS MOUILLÉS.
 LES FILS D'ALIMENTATION 90°C MIN.

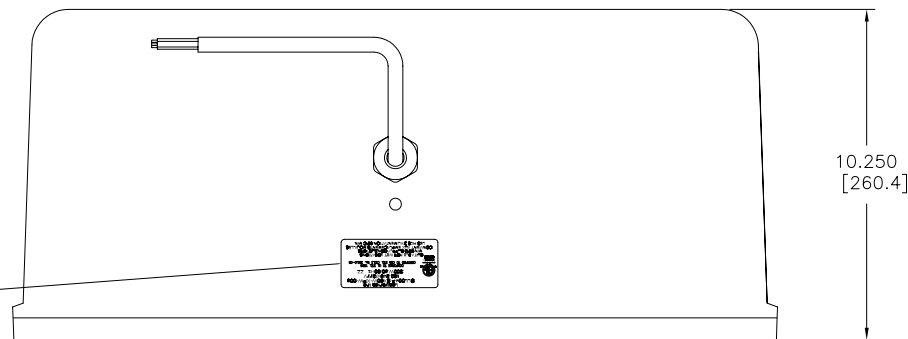

SIDE VIEW

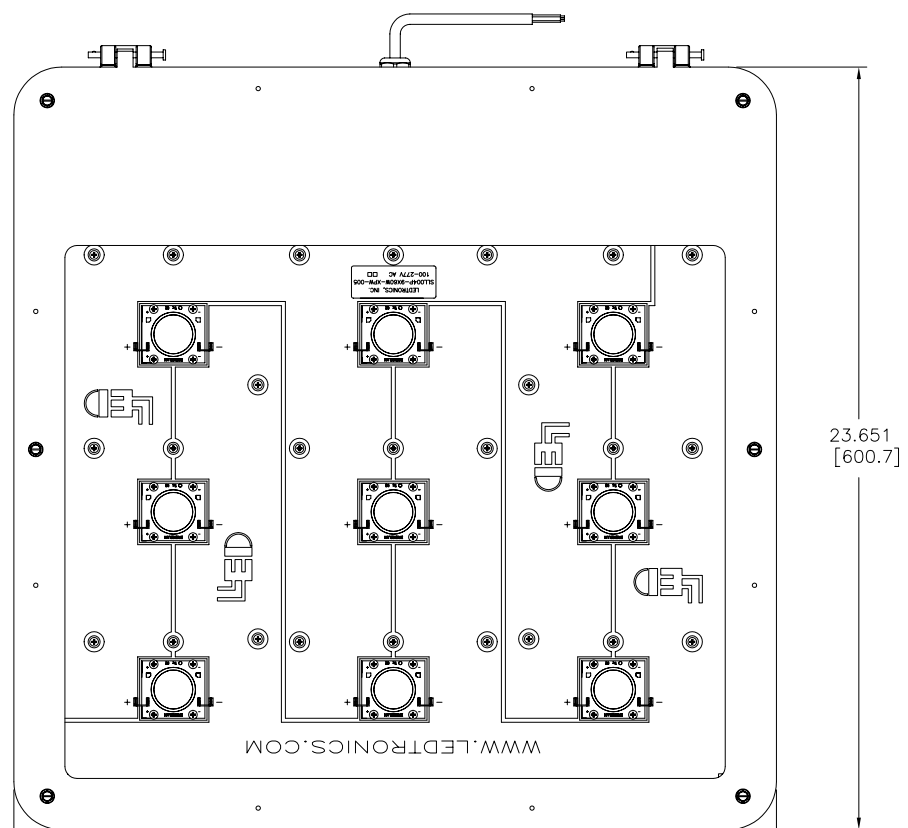

TOP VIEW

- NOTES:**
1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
 2. HOUSING MATERIAL: DIE-CAST-ALUMINUM
 3. LENS MATERIAL: TEMPERED CLEAR GLASS
 4. WEIGHT: 61 lbs.




ELECTRO-OPTICAL CHARACTERISTICS

SLL004P-9X60W-XPW-005	PURE WHITE	100-277VAC	2800 (max)	300 W	0.99	85	25170 lm	7333 cd	5500K~6350K	74	115°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	INPUT CURRENT (mA)	ENERGY USED (Watts)	POWER FACTOR	EFFICACY (lm/W)	TOTAL LUMENS	MAXIMUM CANDELA	COLOR TEMP. (K)	CRI	VIEWING ANGLE

REVISION NOTIFICATION

<input type="checkbox"/>	PMA
<input checked="" type="checkbox"/>	UL/ETL
<input checked="" type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

 LED[®] LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.	TITLE SLL004P-9X60W-XPW-005			
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°.30' FRACT. ± 1/32	DWG NO SLL004001-CUST	SCALE NTS	SHEET 1 OF 1	DATE 04-20-11
	CODE IDENT NO. 8Z410	DWG BY GP 04-20-11	CHK BY QA RD 04-24-13	MFG LD 04-23-13	R&D BJ 04-23-13