



LTR	REVISION	DATE	APPD
5	042213-JH01: UPDATE TEST DATA	04-23-13	GP


Ledtronics Inc.
SLL003P-4X60W-XPW-005
 100-240V/277V
 147W 50/60Hz ZZ
 CONFORMS TO UL STD. 1598
 CERTIFIED TO CSA STD. C22.2 No. 250.0-08
 SUITABLE FOR WET LOCATIONS.
 MIN 90°C SUPPLY CONDUCTORS.
 CONVIENT AUX EMPLACEMENTS MOUILLES.
 LES FILS D'ALIMENTATION 90°C MIN.

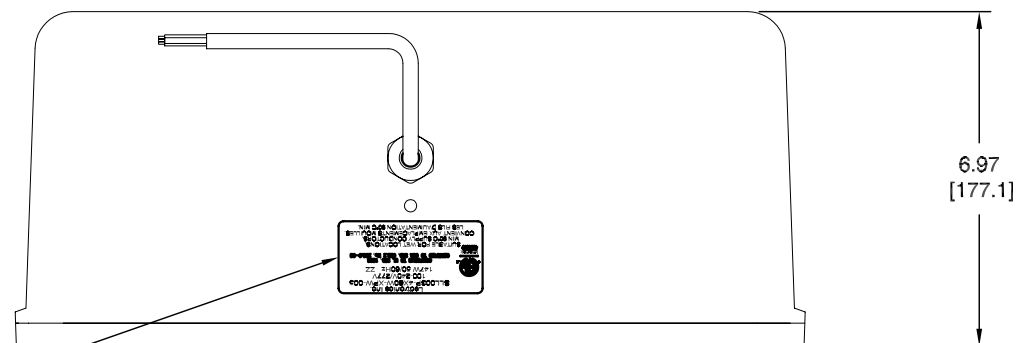

REAR VIEW

6.97
[177.1]

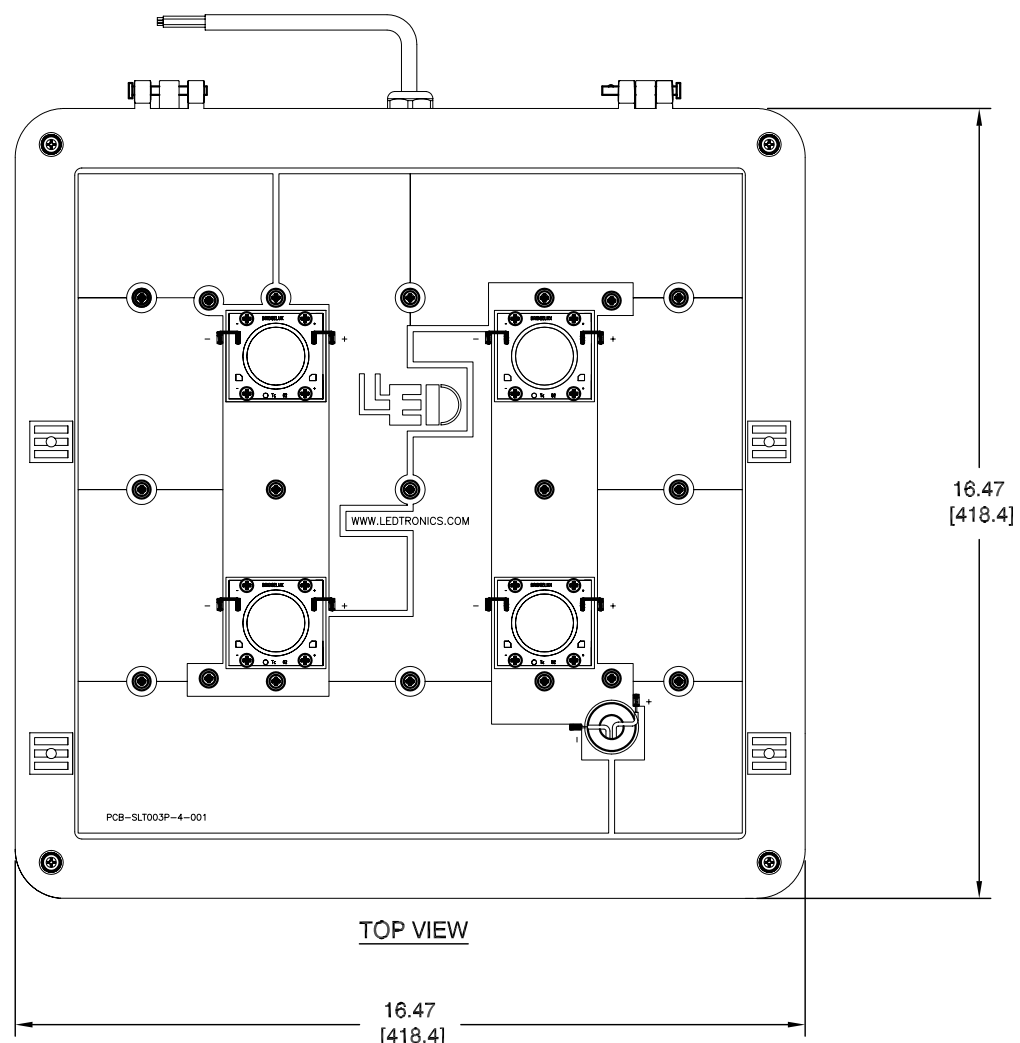

TOP VIEW

16.47
[418.4]

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. HOUSING MATERIAL: DIE-CAST-ALUMINUM
3. LENS MATERIAL: TEMPERED CLEAR GLASS



REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input checked="" type="checkbox"/>	UL/ETL
<input checked="" type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER _____

ELECTRO-OPTICAL CHARACTERISTICS

SLL003P-4X60W-XPW-005	PURE WHITE	100-277VAC	1000-1270	138 W	0.99	12,923.8	4629.7	5198K	73	113.5°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE (TESTED @ 120VAC)	INPUT CURRENT (mA)	POWER (Watts)	POWER FACTOR	TOTAL LUMENS	MAXIMUM CANDELA	COLOR TEMP. (K)	CRI	VIEWING ANGLE


LEDTRONICS,™ INC.
 23105 KASHIWA COURT
 TORRANCE, CA 90505

-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.
 .XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE				
SLL003P-4X60W-XPW-005				
DWG NO	SCALE	SHEET	DATE	
SLL003070-CUST	1:4	1 OF 1	02-09-11	
CODE IDENT NO.	DWG BY	CHK BY	QA RD	MFG LD R&D BJ
8Z410	02-09-11		04-24-13	04-23-13 04-23-13