


LTR	REVISION	DATE	APPD
C	071812-AG01: UPDATE TEST DATA, LABEL, & CLUSTER BOARD.	07-18-12	AG

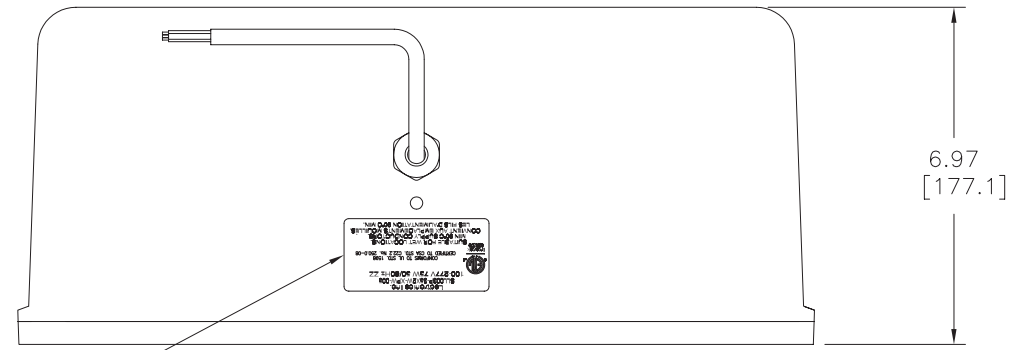


REAR VIEW

Ledtronics Inc.
SLL003P-35X2W-XPW-005
100-277V 75W 50/60Hz ZZ

CONFORMS TO UL STD. 1598
CERTIFIED TO CSA STD. C22.2 No. 250.0-08

Intertek
4001379

SUITABLE FOR WET LOCATIONS.
MIN 90°C SUPPLY CONDUCTORS.
CONVIENT AUX EMPLACEMENTS MOUILLÉS.
LES FILS D'ALIMENTATION 90°C MIN.

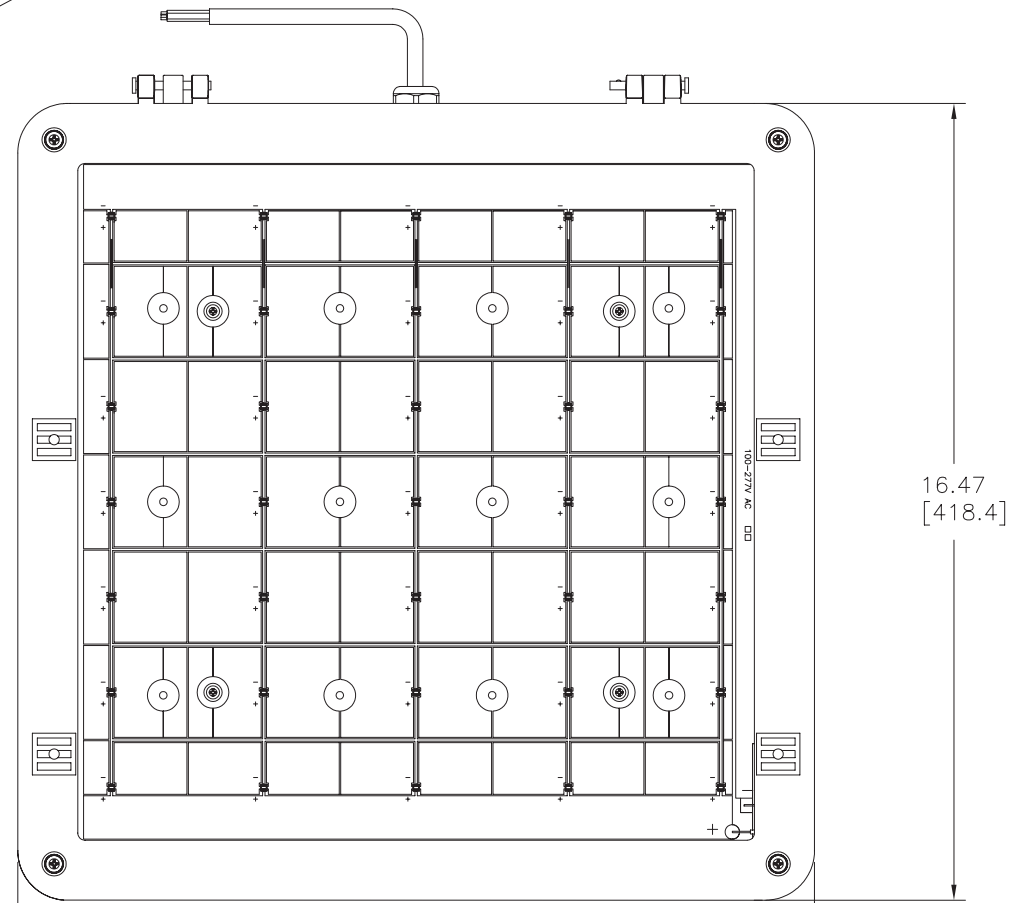

TOP VIEW

NOTES:

1. ALL DIMS ARE IN INCHES [MILLIMETERS].
2. Intertek ETL file 100086558LAX-001a, Issued: 27-Jul-2010.
3. HOUSING MATERIAL: DIE-CAST-ALUMINUM
4. LENS MATERIAL: TEMPERED CLEAR GLASS
5. WEIGHT: 24 lbs [11 kg]



REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input checked="" type="checkbox"/>	UL
<input checked="" type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V (TESTED @ 120VAC)	INPUT CURRENT (mA)	ENERGY USED (Watts)	POWER FACTOR	EFFICACY (lm/W)	TOTAL LUMENS	FOOT CANDELA (max)	COLOR TEMP. (K)	CRI	VIEWING ANGLE
SLL003P-35X2W-XPW-005	PURE WHITE	100-277VAC	570-700	75.4 W	.99	73	5537 lm	1924 cd	4500K~5250K	73	111°
ELECTRICAL TEST											

LED[®]
LEDTRONICS, INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary Information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE					
SLL003P-35X2W-XPW-005					
DWG NO	SCALE	SHEET	DATE		
SLL003063-CUST	1:4	1 OF 1	09-20-10		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	MM 09-20-10		RD 07-19-12	BJ	07-19-12