


LTR	REVISION	DATE	APPD
4	071111-AV01: CHECK BOX "UL"	07-14-11	GP


Ledtronics Inc.
SLL003P-800-XXX-X04
 100-240V/277V
 36W 50/60Hz ZZ

 CONFORMS TO UL STD. 1598
 CERTIFIED TO CSA STD. C22.2 No. 250.0-08

 4001379
 SUITABLE FOR WET LOCATIONS.
 MIN 90°C SUPPLY CONDUCTORS.
 CONVIENT AUX EMPLACEMENTS MOUILLÉS.
 LES FILS D'ALIMENTATION 90°C MIN.

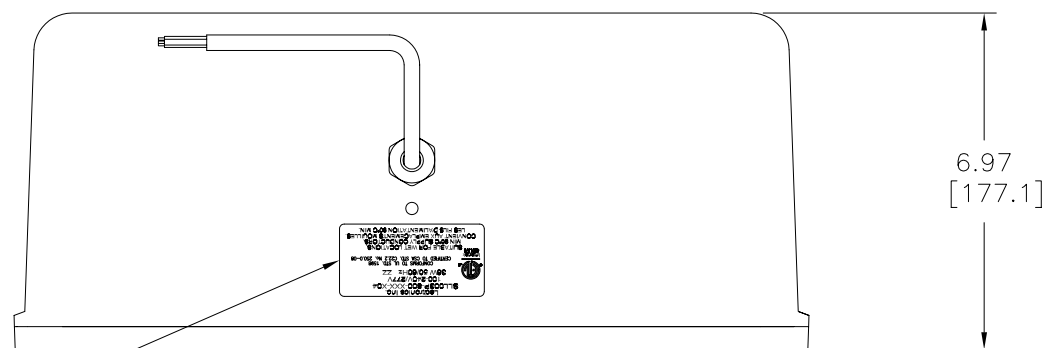

REAR VIEW

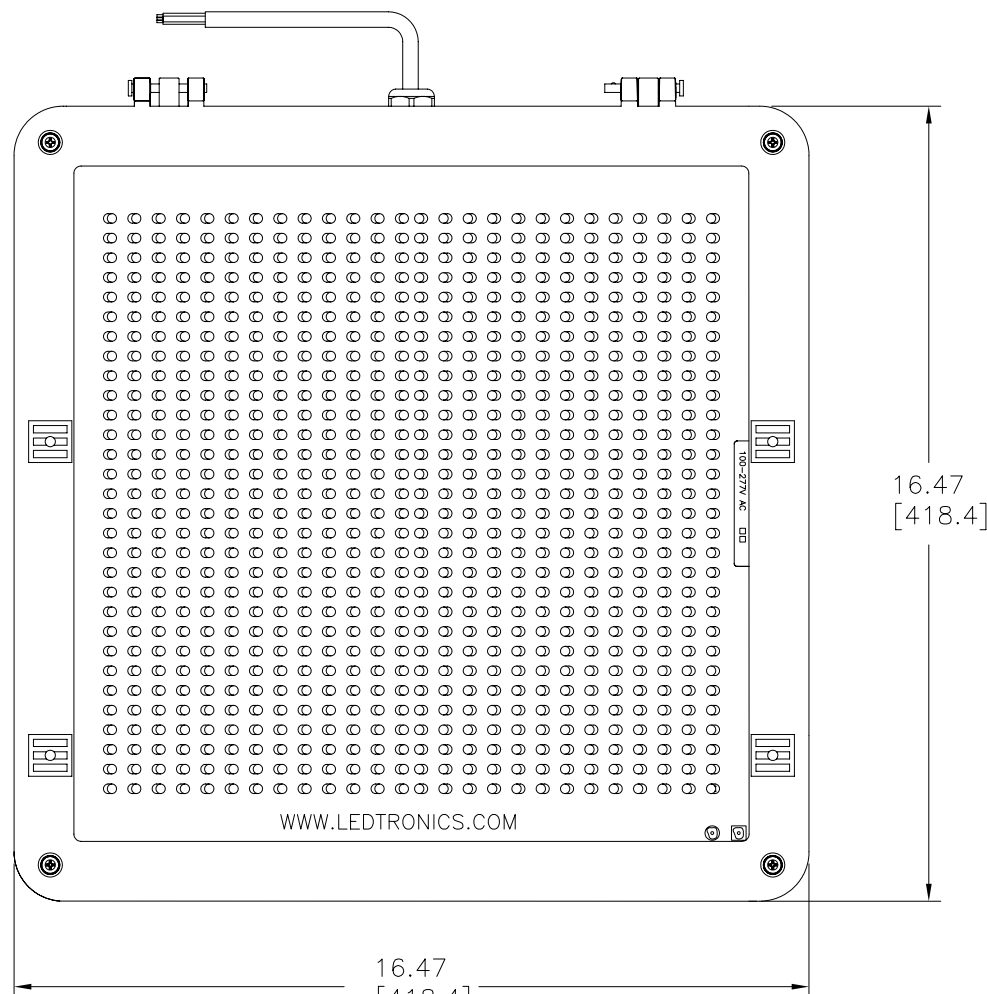

TOP VIEW

- NOTES:**
1. ALL DIMS ARE IN INCHES [MILLIMETERS].
 2. HOUSING MATERIAL: DIE-CAST-ALUMINUM
 3. LENS MATERIAL: TEMPERED CLEAR GLASS
 4. WEIGHT: 16.1 lbs.



REVISION NOTIFICATION

<input type="checkbox"/> PMA
<input checked="" type="checkbox"/> UL
<input checked="" type="checkbox"/> MADE IN USA
<input type="checkbox"/> CUSTOMER _____
<input type="checkbox"/> OTHER

SLL003P-800-HIW-104	WARM WHITE	100-277VAC	250-315	35.6 W	0.99	2538	2367	2800K	76	45°X80°
SLL003P-800-TPW-104	TRUE WHITE	100-277VAC	250-315	33.6 W	0.99	3652	3018	4800K~5200K	75	50°X75°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE (TESTED @ 120VAC)	INPUT CURRENT (mA)	ENERGY USED (Watts)	POWER FACTOR	TOTAL LUMENS	FOOT CANDELA (max)	COLOR TEMP. (K)	CRI	VIEWING ANGLE
ELECTRICAL TEST										

LED[®]
LEDTRONICS,™ INC.
 23105 KASHIWA COURT
 TORRANCE, CA 90505

-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°.30'
 FRACT. ± 1/32

TITLE SLL003P-800-XXW-104											
DWG NO		SCALE		SHEET		DATE					
SLL003064-CUST		1:4		1 OF 3		12-02-10					
CODE IDENT NO.	DWG BY	CHK BY	QA	RD	MFG	LD	R&D	BJ			
8Z410	GP	12-02-10	07-18-11	07-15-11	07-15-11	07-15-11					

Luminaire Photometric Report

Filename: SLL003P-800-HIW-104

Manufacturer: LEDTRONICS -

Luminaire: CLEAR LENS, 120VAC, 35.6W

Luminaire Cat: SLL003P-800-HIW-104

Lamp: . LUMEN RATING: 2537.6Lms.

Lamp Output: 1 lamp(s), rated lamp lumens: 2537.6

Max Candela: 2,367.0 at Horizontal: 90, Vertical: 20


Luminous Opening: Point

Test: 11-17-10

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,311.9	51.7%	51.7%
0-40	1,856.6	73.2%	73.2%
0-60	2,350.9	92.6%	92.6%
60-90	186.8	7.4%	7.4%
0-90	2,537.6	100%	100%
0-180	2,537.6	100%	100%

Total Efficiency: 100%

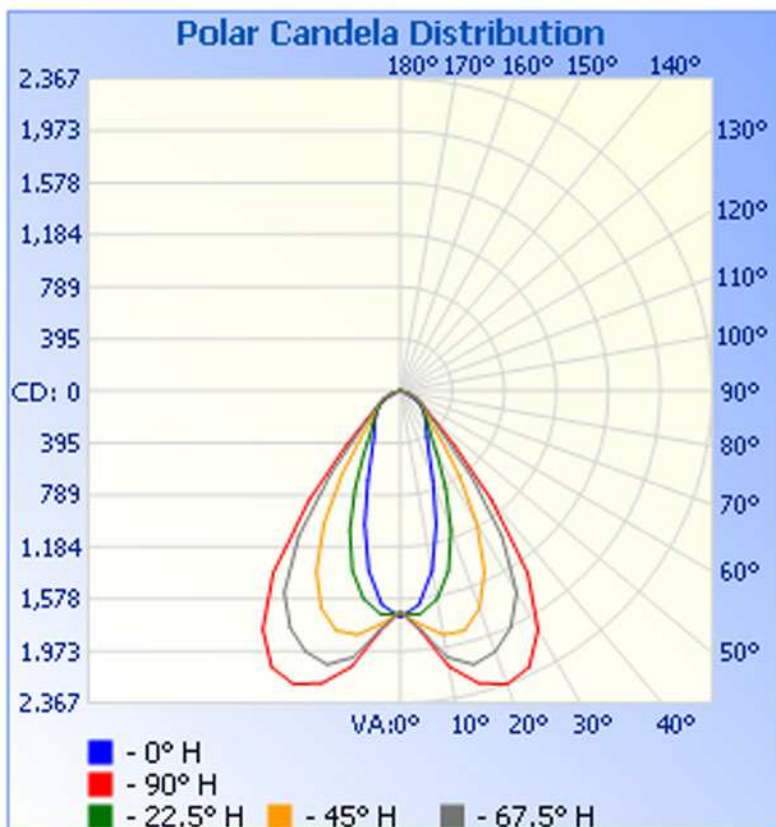


Illuminance at a Distance

Center Beam FC Beam Width

3.3ft	154.35 fc	2.7ft	5.5ft
6.7ft	38.59 fc	5.4ft	10.9ft
10.0ft	17.15 fc	8.1ft	16.4ft
13.3ft	9.65 fc	10.8ft	21.8ft
16.7ft	6.17 fc	13.5ft	27.3ft
20.0ft	4.29 fc	16.2ft	32.7ft

■ Vert. Spread: 44.0°

■ Horiz. Spread: 78.6°

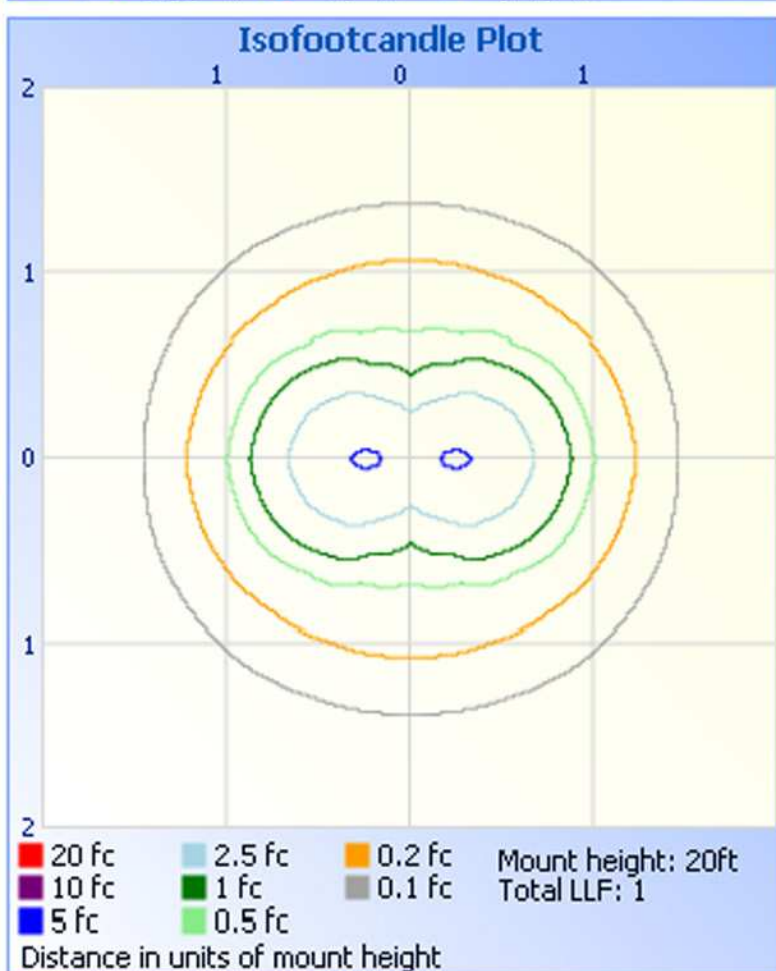

Luminaire Photometric Report

Filename: SLL003P-800-TPW-104

Manufacturer: LEDTRONICS -

Luminaire: CLEAR LENS, 120VAC, 33.6W

Luminaire Cat: SLL003P-800-TPW-104

Lamp: . LUMEN RATING: 3651.5Lms.

Lamp Output: 1 lamp(s), rated lamp lumens: 3651.5

Max Candela: 3,018.0 at Horizontal: 90, Vertical: 20

Luminous Opening: Point

Test: 11-12-10

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,882.6	51.6%	51.6%
0-40	2,640.4	72.3%	72.3%
0-60	3,344.4	91.6%	91.6%
60-90	307.1	8.4%	8.4%
0-90	3,651.5	100%	100%
0-180	3,651.5	100%	100%

Total Efficiency: 100%

Illuminance at a Distance


Center Beam FC Beam Width

3.3ft	222.30 fc	3.0ft	5.2ft
6.7ft	55.58 fc	6.1ft	10.3ft
10.0ft	24.70 fc	9.1ft	15.5ft
13.3ft	13.89 fc	12.1ft	20.7ft
16.7ft	8.89 fc	15.2ft	25.9ft
20.0ft	6.18 fc	18.2ft	31.0ft

■ Vert. Spread: 49.0°

■ Horiz. Spread: 75.6°

Polar Candela Distribution

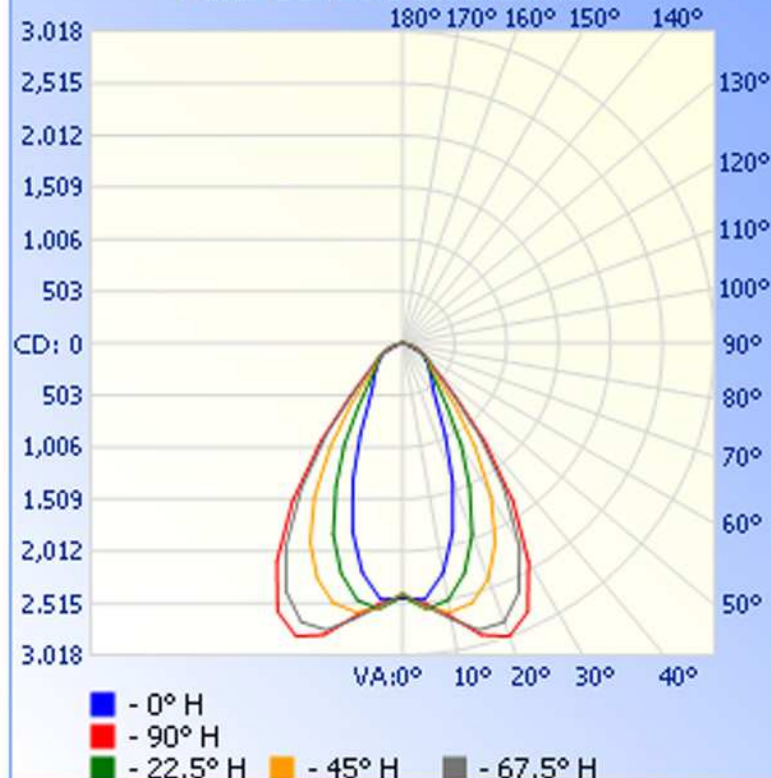

Isofootcandle Plot

