



SIDE VIEW

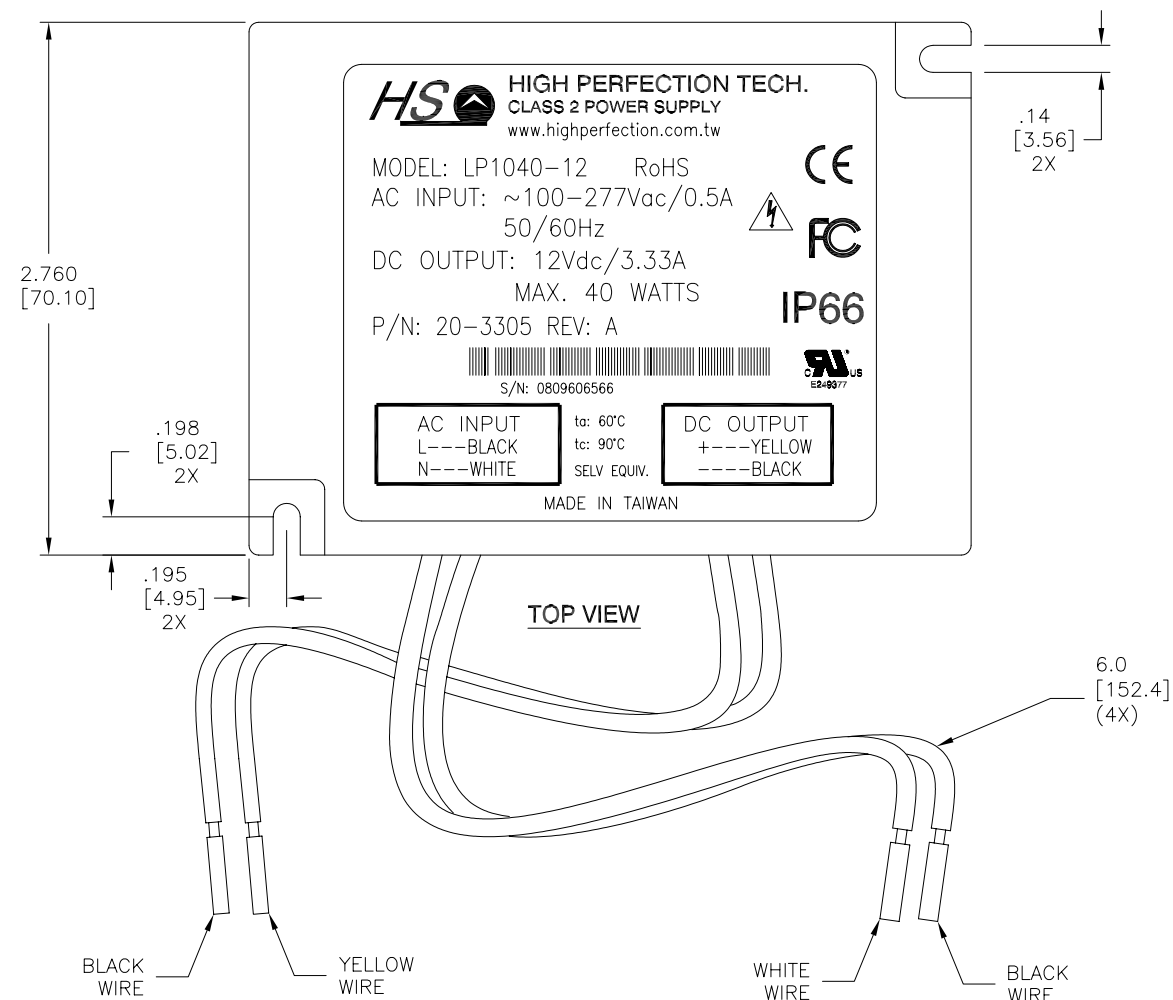

TOP VIEW

BLACK WIRE      YELLOW WIRE      WHITE WIRE      BLACK WIRE

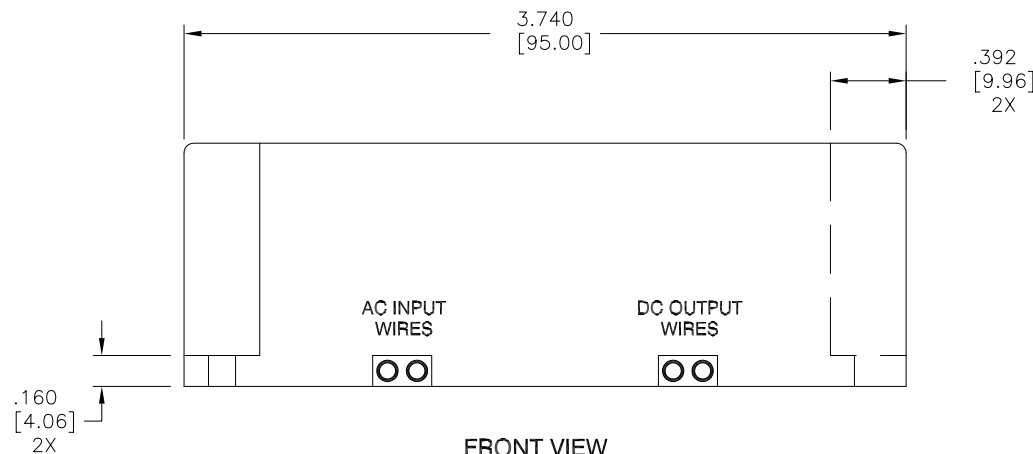

FRONT VIEW

**SPECIFICATIONS**

1. AC INPUT: 100~277Vac/0.5A/47~63Hz.
2. INPUT INRUSH CURRENT: <10A/115Vac, <20A/230Vac
3. POWER FACTOR: Max. >0.92 AT FULL LOAD, 115Vac, 230Vac
4. CURRENT CREST FACTOR: 1.5 MAX
5. TOTAL HARMONIC DISTORTION: 20% MAX
6. EFFICIENCY: 85% Typical
7. PROTECTION: OCP, OVP, SCP-Auto Recovery.
8. OPERATION TEMP: -30°C~+60°C, Tc:90°C
9. STORAGE TEMP: -40°C~+85°C.
10. MTBF (@25°C): >100,000 Hours. MIL-217F.
11. SAFETY: UL1310 CLASS 2, UL48, cUL
12. WEIGHT: 370 GRAMS TYPICAL



REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

PWR-12VCV-3.33A-PF	7-12V	3.3±5%	40W
LEDTRONICS PART NO.	DC OUTPUT VOLTAGE	DC OUTPUT CURRENT (A)	WATTS MAX.
ELECTRICAL TEST			

**LED<sup>®</sup>**  
**LEDTRONICS,™ INC.**  
 23105 KASHIWA COURT  
 TORRANCE, CA 90505

-PROPRIETARY-  
 This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5  
 .XX ± .025 (UNLESS OTHERWISE STATED)  
 ANGLES ± 0°.30'  
 FRACT. ± 1/32

TITLE <b>PWR-12VCV-3.33A-PF</b>			
DWG NO CMMS0384	SCALE 1:1	SHEET 1 OF 1	DATE 08-03-07
CODE IDENT NO. 8Z410	DWG BY MM 08-03-07	CHK BY QA RD 07-19-12	MFG LD 07-18-12
			R&D BJ 07-18-12